






Abbruchgreifer und Sortiergreifer ASG






Abbruchgreifer G1-ASG105 bis G4-ASG500



Technische Daten	G1-ASG105	G2-ASG160	G3-ASG280	G4-ASG460	G4-ASG500
Baggerdienstgewicht (t)	1 - 2	1.5 - 3	3 - 5	4 - 6	5 - 8
Gewicht (kg)	105	160	280	400	435
Schließkraft (kN)	7	15	20	23	24
Schaleninhalt (l)	40	70	100	150	200
A - Höhe offen (mm)	610	650	770	880	910
A1- Höhe geschlossen (mm)	670	670	850	1.010	1.085
B- Breite geschlossen mm)	500	800	780	850	905
C - Schnittbreite (mm)	350	450	500	600	700
D - Öffnungsmaß (mm)	770	800	1.160	1.400	1.520
Ölliefermenge (l/min)	20	25	35	40	50
Ölliefer. drehen (l/min)	5	10	10	12	12
Öffnen P _{max} (bar)	300	300	300	300	300
Drehen P _{max} (bar)	170 - 210	170 - 210	170 - 210	190 - 210	190 - 210




Abbruchgreifer G5-ASG600 bis G10-ASG1000



mehr erfahren

Technische Daten	G5-ASG600	G6-ASG700	G8-ASG800	G10-ASG1000
Baggerdienstgewicht (t)	7 - 11	9 - 12	10 - 16	12 - 20
Gewicht (kg)	500	600	832	1.070
Schließkraft (kN)	24	30	35	46
Schaleninhalt (l)	200	300	400	500
A - Höhe offen (mm)	990	1.050	1.140	1.245
A1- Höhe geschlossen (mm)	1.156	1.220	1.315	1.456
B- Breite geschlossen (mm)	885	1.055	1.070	1.175
C - Schnittbreite (mm)	700	600	800	800
D - Öffnungmaß (mm)	1.550	1.700	1.750	1.950
Ölliefermenge (l/min)	70	90	100	120
Ölliefer. drehen (l/min)	15	15	25	25
Öffnen P_{max} (bar)	320	350	350	350
Drehen P_{max} (bar)	190 - 210	190 - 210	190 - 210	190 - 210


Abbruchgreifer G11-ASG1090 bis G15-ASG1800



Technische Daten	G11- ASG1090	G11- ASG1100	G13- ASG1200	G14- ASG1500	G15- ASG1800
Baggerdienstgewicht (t)	13 - 20	16 - 20	16 - 25	17 - 28	20 - 28
Gewicht (kg)	1.100	1.145	1.360	1.420	1.480
Schließkraft (kN)	46	46	55	55	55
Schaleninhalt (l)	600	700	750	800	850
A - Höhe offen (mm)	1.245	1.245	1.485	1.485	1.485
A1- Höhe geschlossen (mm)	1.456	1.456	1.675	1.675	1.675
B - Breite geschlossen (mm)	1.175	1.175	1.300	1.340	1.300
C - Schnittbreite (mm)	900	1.000	900	1.000	1.200
D - Öffnungsmaß (mm)	1.950	1.950	2.100	2.100	2.100
Ölliefermenge (l/min)	120	120	160	160	160
Ölliefer. drehen (l/min)	25	25	35	25	35
Öffnen P _{max} (bar)	350	350	350	350	350
Drehen P _{max} (bar)	190 - 210	190 - 210	190 - 210	190 - 210	190 - 210

Abbruchgreifer G18-ASG2100 bis G38-ASG4100

- niedrig Bauhöhe und geringes Eigengewicht

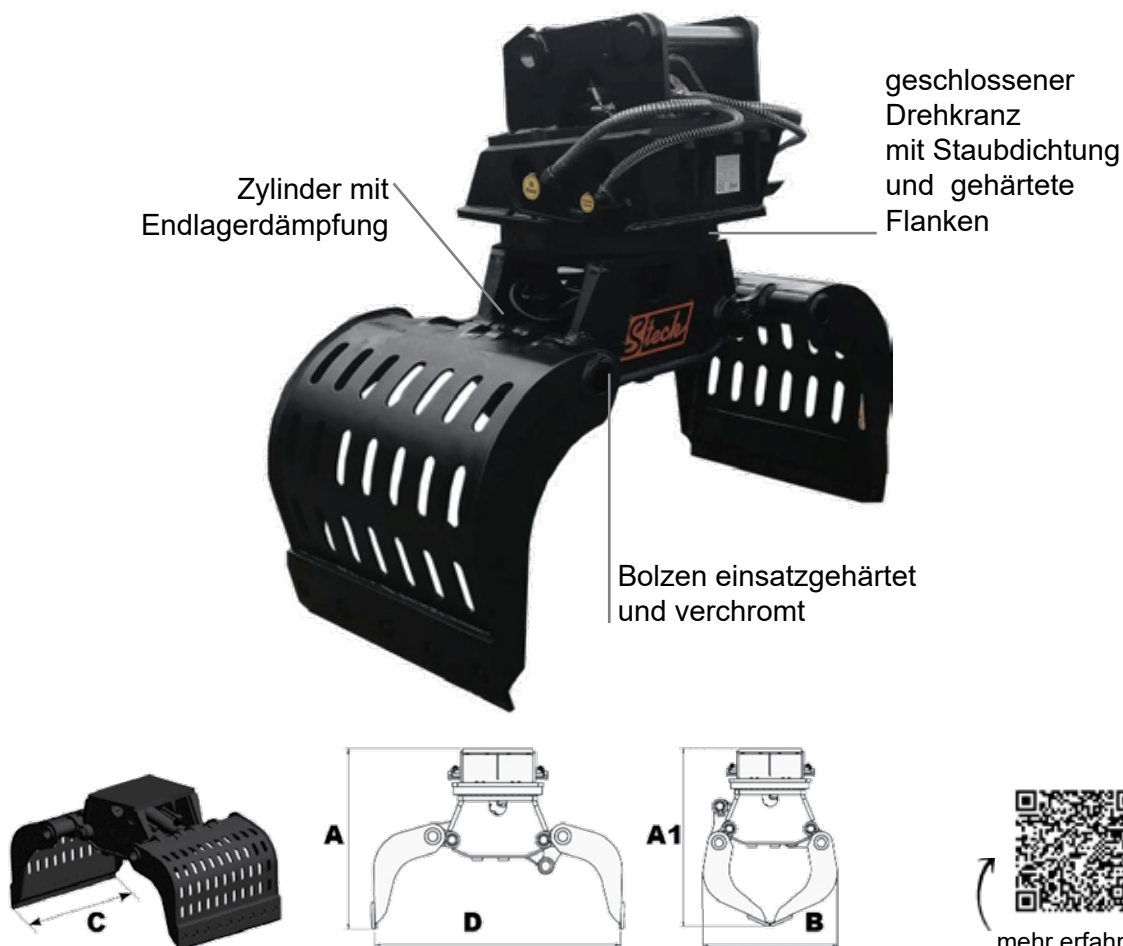

Technische Daten	G18- ASG2100	G20- ASG2300	G25- ASG2700	G27- ASG2900	G38- ASG4100
Baggerdienstgewicht (t)	23 - 30	25 - 38	28 - 40	30 - 50	40 - 65
Gewicht (kg)	1.750	1.880	2.500	2.700	3.910
Schließkraft (kN)	68	80	90	90	110
Schaleninhalt (l)	900	950	1.000	1.100	1.500
A - Höhe offen (mm)	1.430	1.460	1.635	1.635	1.800
A1 - Höhe geschlossen (mm)	1.695	1.690	1.830	1.830	2.050
B - Breite geschlossen (mm)	1.340	1.350	1.370	1.370	1.755
C - Schnittbreite (mm)	1.200	1.200	1.200	1.360	1.500
D - Öffnungsmaß (mm)	2.250	2.250	2.250	2.250	2.850
Ölliefermenge (l/min)	170	170	200	200	250
Ölliefer. drehen (l/min)	35	35	35	35	40
Öffnen P_{max} (bar)	350	350	350	350	350
Drehen P_{max} (bar)	190 - 210	190 - 210	190 - 210	190 - 210	190 - 210

Steck Abbruchgeräte GmbH
Hauptstr. 20
D- 89192 Rammingen

Tel. +49 (0) 7345 9123 - 0
Fax +49 (0) 7345 9123 - 20
E-Mail info@steck.de
Internet www.steck.de

Ihr Ansprechpartner:

