




JCPT(DC)

Self-Propelled Scissor Lifts

(Electric motor drive)

JCPT0808DC / JCPT1008DC / JCPT1012DC / JCPT1212DC / JCPT1412DC / JCPT1612DC

	JCPT0808DC	JCPT1008DC	JCPT1012DC	JCPT1212DC	JCPT1412DC	JCPT1612DC
S.W.L	380kg	230kg	450kg	320kg	320kg	200kg
S.W.L on extension	113kg	113kg	113kg	113kg	113kg	113kg
Max. Occupants	2	2	2	2	2	2
Working height	8.0m	10.0m	10.0m	12.0m	13.8m	15.7m
Platform floor height	6.0m	8.0m	8.0m	10.0m	11.8m	13.7m
Overall length	2.48m	2.48m	2.48m	2.48m	2.48m	2.84m
Overall width	0.81m	0.81m	1.15m	1.15m	1.15m	1.15m
Overall height(Rails up)	2.21m	2.34m	2.34m	2.47 m	2.59m	2.59m
Overall height(Rails down)	1.75m	1.88m	1.86m	1.99m	2.17m	2.17m
Platform size	2.27X0.81m	2.27X0.81m	2.27X1.12m	2.27X1.12m	2.27X1.12m	2.64X0.81m
Platform extension size	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m
Ground clearance(Stowed)	0.1m	0.1m	0.1m	0.1m	0.1m	0.1m
Ground clearance(Raised)	0.019m	0.019m	0.019m	0.019m	0.019m	0.019m
Wheelbase	1.87m	1.87m	1.87m	1.87m	1.87m	2.22m
Turning radius(Inside)	0m	0m	0m	0m	0m	0m
Turning radius(Outside)	2.10m	2.10m	2.20m	2.20m	2.20m	2.65m
Drive motors	24V/1.5kw	24V/1.5kw	24V/1.5kw	24V/1.5kw	24V/1.5kw	24V/1.5kw
Lifting motor	24V/3kw	24V/3kw	24V/3kw	24V/3kw	24V/3kw	24V/3kw
Travel speed(Stowed)	4.5km/h	4.5km/h	4 km/h	4km/h	4km/h	4km/h
Travel speed(Raised)	0.8 km/h	0.8km/h	0.8km/h	0.8km/h	0.8km/h	0.8km/h
Up/Down speed	31 / 67sec	42 / 30sec	36 / 33sec	54 / 42sec	84 / 38sec	88 / 60sec
Batteries	4X6 V/210Ah	4X6 V/210 Ah	4X6 V/210Ah	4X6 V/210 Ah	4X6 V/210Ah	4X6 V/210Ah
Integrated charger	24V/ 25A	24V/25A	24V/25 A	24V/25 A	24V/ 25A	24V/ 25A
Gradeability	25%	25%	25%	25%	25%	25%
Maximum working slope	2 - 3 °	2 - 3 °	2 - 3 °	2 - 3 °	1.5 - 3 °	1.5 - 3 °
Tyres	Φ 381X127mm	Φ 381X127mm	Φ 381X127mm	Φ 381X127mm	Φ 381X127mm	Φ 381X127mm
Weight	1900kg	2080kg	2220kg	2490kg	2760kg	2800kg

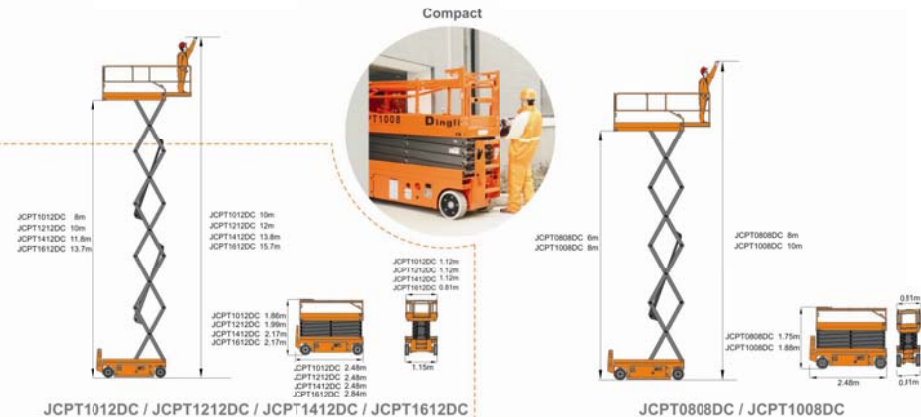

Standard equipment

- Proportional controls
- Automatic pothole protection
- Self-lock gate on platform
- Drivable at full height
- Non-marking tyre
- 2WD
- Automatic brake system
- Emergency lowering system
- Emergency stop button
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- All Motion Alarm
- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding guardrails
- Extended platform
- Charger protection
- Flashing beacon

Options

- Overload sensor with alarm
- AC power to platform
- Platform work lights
- Airline to platform



Swing out tray



Folding guardrails



Tight turning radius



Waterproof



Gradeability




JCPT0807DC

Self-Propelled Scissor Lifts

JCPT0807DC

	S.W.L	230kg
	S.W.L on extension	113kg
	Max. Occupants	2
	Working height	7.8m
	Platform floor height	5.8m
	Overall length	1.86m
	Overall width	0.76m
	Overall height(Rails up)	2.18m
	Overall height(Rails down)	1.84m
	Platform size	1.67X0.74m
	Platform extension size	0.9m
	Ground clearance(Stowed)	0.09m
	Ground clearance(Raised)	0.019m
	Wheelbase	1.38m
	Turning radius(Inside)	0m
	Turning radius(Outside)	1.64m
	Drive motors	24V/0.5kw
	Lifting motor	24V/2kw
	Travel speed(Stowed)	5km/h
	Travel speed(Raised)	0.8km/h
	Up/Down speed	27/ 22 sec
	Batteries	4X6V/185Ah
	Integrated charger	24V/ 25A
	Gradeability	25%
	Maximum working slope	2 - 3 °
	Tyres	Φ 305X100mm
	Weight	1240kg

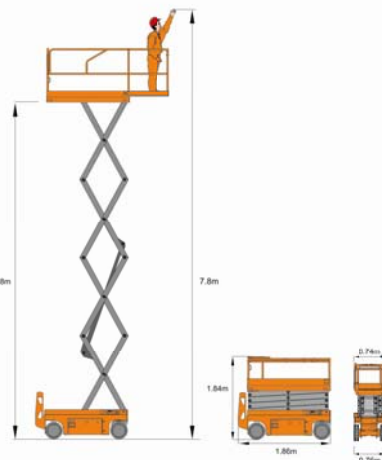

Swing out tray



Folding guardrails



Waterproof



Gradeability



Tight turning radius

Standard equipment

- Proportional controls
- Automatic pothole protection
- Self-lock gate on platform
- Drivable at full height
- Non-marking tyre
- 2WD
- Automatic brake system
- Emergency lowering system
- Emergency stop button
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- All Motion Alarm
- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding guardrails
- Extended platform
- Charger protection
- Flashing beacon

Options

- Overload sensor with alarm
- AC power to platform
- Platform work lights
- Airline to platform



JCPT0607DCS

Self-Propelled Scissor Lifts (Electric Motor Drive)



JCPT0607DCS





S.W.L	240kg
S.W.L On Extension	100kg
Max.Occupants	2
A Max.Working Height(CE/ANSI)	5.60m/5.90m
B Max.Platform Floor Height(CE/ANSI)	3.60m/3.90m
C Overall Length(With Ladder)	1.44m
Overall Length(Without Ladder)	1.29m
D Overall Width	0.76m
E Overall Height(Rails Up)	2.02m
Overall Height(Rails Down)	1.66m
Platform Size(Length/Width F)	1.29×0.70m
G Platform Extension Size	0.60m
Ground Clearance(Stowed)	0.06m
Ground Clearance(Raised)	0.015m
Wheelbase	1.05m
Turning Radius(Inside/Outside)	0.40m/1.55m
Drive Motor	24V/0.4kW
Lifting Motor	24V/1.2kW
Travel Speed(Stowed)	4.0km/h
Travel Speed(Raised)	0.5km/h
Up/Down Speed	32/27sec
Gradeability	25%
Max.Working Slope(CE)	1.5°/3°
Max.Working Slope(ANSI)	2°/3°
Batteries	2×12V/85Ah
Integrated Charger	24V/10A
Tyres	Φ230×80mm
Weight(CE)	880kg
Weight(ANSI)	880kg



Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Pothole Protection
- Onboard Diagnostic System
- Non Marking Tyre
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Forklift Pockets
- Charger Protection
- All Motion Alarm
- 2WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm
- Folding Guardrails

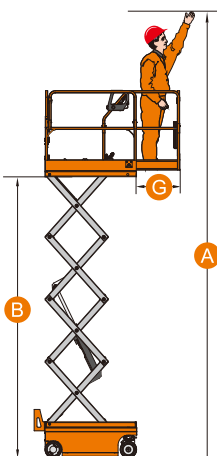

Compact Turning Radius



Pothole Device



Touch Display Screen



Gradeability



Extended Platform



Folding Guardrails



Slide Out Tray



Safety Bracket

JCPT(Mobile)


Mobile Scissor Lifts



Standard Equipment

- Battery Charge Indicator
- Self-lock Gate On Platform
- Leveling Indicator
- Safety Brackets
- Emergency Stop Button
- Emergency Lowering System
- Dual Locking Castors
- Forklift Pockets
- All Motion Alarm
- Folding Guardrails
- Cylinder Holding Valve

Dingli			JCPT0607A
	S.W.L		240kg
	Max.Occupants		1
	A Max.Working Height		5.90m
	B Max.Platform Floor Height		3.90m
	C Overall Length(With Ladder)		1.44m
	Overall Length(Without Ladder)		1.29m
	D Overall Width		0.76m
	Overall Height(Rails Up)		1.96m
	E Overall Height(Rails Down)		1.56m
	Platform Size(Length/Width F)		1.29m×0.7m
	Ground Clearance		0.06m
	Wheelbase		1.10m
	Lifting Motor		12V/0.8kW
	Up/Down Speed		30/29sec
	Batteries		12V/85Ah
	Integrated Charger		12V/15A
	Tyres		6in
	Weight(CE)		530kg
	Weight(ANSI)		530kg

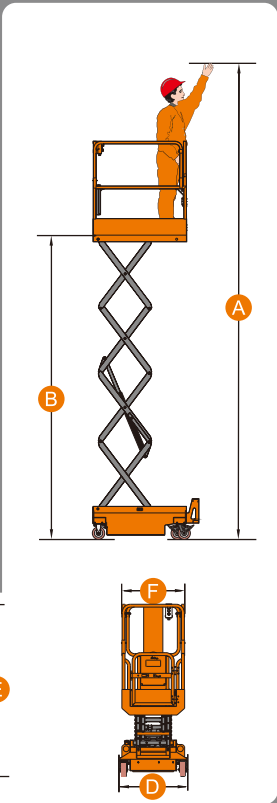

Castor With Brake



Folding Guardrails



Automatic Brake System-Option



Slide Out Tray



Emergency Lowering System



Safety Bracket



Leveling Indicator



Platform Controller