Genie® GS™-1932

Specifications

Models	GS-1932	
Measurements	**US**	**Metric**
Working height max. - indoor[1]	24 ft 6 in	7.64 m
Working height max. - outdoor[1]	20 ft	6.27 m
A Platform height max. - indoor	18 ft 6 in	5.64 m
A Platform height max. - outdoor	14 ft	4.27 m
B Platform height - stowed	2 ft 11 in	0.89 m
C Platform length - outside	6 ft 2 in	1.88 m
C Platform length - outside, extended	9 ft 2 in	2.79 m
Slide-out platform extension deck - length	3 ft	0.91 m
D Platform width - outside	2 ft 6.5 in	0.78 m
Guardrail height	3 ft 7 in	1.10 m
Toeboard height	6 in	15 cm
E Machine Height - stowed (fixed guardrails or folding rails up)	6 ft 7 in	2.00 m
Machine Height - stowed (rails lowered)	4 ft 11 in	1.50 m
F Length machine - stowed (integrated ladder or w/out ladder)	6 ft 2 in	1.88 m
Length machine - stowed, extended	9 ft 2 in	2.79 m
G Width	2 ft 8 in	0.81 m
H Wheelbase	5 ft 1 in	1.55 m
I Ground clearance (center) - pothole guards retracted	4 in	10 cm
I Ground clearance - pothole guards deployed	0.8 in	2 cm

Productivity

Max. platform occupancy (in/out)	2/1	
Lift capacity	500 lb	227 kg
Lift capacity - extension deck extended	250 lb	113 kg
Max. platform drive height	18 ft 6 in	5.64 m
Drive speed - stowed	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h
Gradeability - stowed[2]	25 %	
Turning radius - inside/outside	0/5 ft 11 in	0/1.80 m
Lifting speed - raise/lower	33/30 sec	
Tilt sensor activation (front to back/side to side)	3°/1.5°	
Tires - solid non-marking	12×4.5 in	31×11 cm

Power


Power - FLA[3]	24V DC (2×12V 150Ah)
Power - AGM	24V DC (2×12V 145Ah)
Power - Lithium-Ion	24V DC (1×24V 90Ah or 106Ah)
Hydraulic tank capacity	1.6 gal / 6.1 L


Weight(4) and Floor Loading[5]


Weight	2,820 lb	1,279 kg
Weight max. (adding all possible options)	3,080 lb	1,397 kg
Tire load max.	1,415 lb	642 kg
Tire contact pressure	157.2 psi	1,084 kPa
Occupied floor pressure	218 psf	10.42 kPa

Sound and Vibration Levels

Sound Pressure level (ground workstation)	< 70 dBA	
Sound Pressure level (platform workstation)	< 70 dBA	
Vibrations	< 8 ft 2 in/s²	< 2.5 m/s²

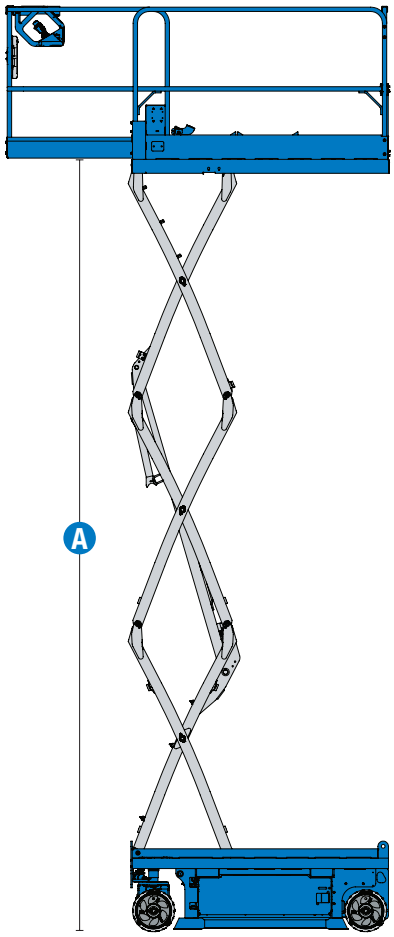

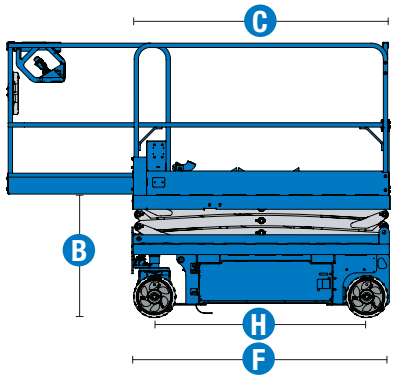

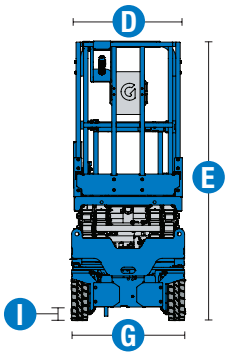

CoMach

Comach Sp. z o. o.
Mail: marcin.chudy@comach.pl
Tel: + 48 663-969-900
www.comach.pl
www.dofinansowaniebhp.pl

(1) The metric equivalent of working height adds 2 m to platform height. US adds 6 ft to platform height.
(2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.
(3) Subject to regional availability.
(4) Weight refers to standard configuration and may vary depending on options and/or country standards.
(5) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

Genie® GS™-1932

SKU: Standard Model

- **GS1932E1CE0074:** GS-1932, E-Drive, 110V, PTP, Fixed rails
- **GS1932E1CE0075:** GS-1932, E-Drive, 220V, PTP Ready, Fixed rails
- GS-1932, E-Drive, E-Lift, Lithium-Ion*

* Build to Order

Option availability		S	S+	BtO
Power	AGM Maintenance-free batteries	✔	✔	✔
	Lithium-Ion battery, 106Ah, UL certified			❍
	Power Inverter		❍	❍
	Rear recessed charger receptacle	✔	✔	✔
Platform	Fixed rails, Half-height swing gate	✔	✔	✔
	Folding rails, Half-height swing gate			❍
	Slide out extension deck	✔	✔	✔
	Power to platform Pre-arrangement (PTP Ready)	✔	✔	✔
	Power to platform no RCBO		❍	❍
	Power to platform with RCBO		❍	❍
	Air line to platform			❍
	Automotive-style horn		❍	❍
	Descent, tilt and motion alarm	✔	✔	✔
	Diamond plate platform deck	✔	✔	✔
	Dual LED flashing beacons	✔	✔	✔
	Electric horn	✔	✔	✔
	Lanyard attachment points	✔	✔	✔
	Platform control guard (PCON)	✔	✔	✔
	Platform load sense system	✔	✔	✔
	Proportional drive and lift	✔	✔	✔
	SmartLink dual zone control system	✔	✔	✔
Chassis	Telematics-ready		❍	❍
	Lift Connect Telematics		❍	❍
	Lift Connect with Access Manager upgrade		❍	❍
	Eco32 biodegradable hydraulic oil		❍	❍
	E-Lift, E-Steer			❍
	Battery Guard - Anti-theft		❍	❍
	Lift Guard White Noise Alarm		❍	❍
	Lift Tools Spill Guard			❍
	Software cut-out while charging (Drive or Drive & Lift)		❍	❍
	Auxiliary platform lowering	✔	✔	✔
	Driveable at full height	✔	✔	✔
	Dual front wheel sealed AC electric drive motors	✔	✔	✔
	Electric brake release	✔	✔	✔
	On board diagnostic system with battery charge indicator	✔	✔	✔
	Pothole protection	✔	✔	✔
	Side and rear fork pockets	✔	✔	✔
	Solid non-marking tires	✔	✔	✔
	Tech Pro Link connector	✔	✔	✔
	Tie-down and lifting points	✔	✔	✔

■ S Standard
■ S+ Standard +
■ BtO Build to Order
✔ Standard Features
❍ Options



Durable Link Stack Design



More Platform Workspace



Standard Fixed Guard Rails



Genie Genuine Accessories(1)

- Lift Tools Work Tray
- Lift Tools Productivity Tools
- Lift Guard Safety Tools
- Tech Pro Link Handheld Device

(1) More accessories available from Genie Genuine Parts.

CoMach

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.

02/25

© 2025 Terex Corporation

Genie® GS™-2632 & GS-2646

Specifications


Models	GS-2632		GS-2646	
Measurements	**US**	**Metric**	**US**	**Metric**
Working height max. - indoor(1)	31 ft 9 in	9.85 m	31 ft 9 in	9.85 m
Working height max. - outdoor(1)	23 ft 6 in	7.33 m	25 ft 8 in	7.99 m
A Platform height max. - indoor	25 ft 9 in	7.85 m	25 ft 9 in	7.85 m
A Platform height max. - outdoor	17 ft 6 in	5.33 m	19 ft 8 in	5.99 m
B Platform height - stowed	4 ft 2 in	1.26 m	4 ft 2 in	1.27 m
C Platform length - outside	7 ft 1 in	2.16 m	7 ft 1 in	2.16 m
C Platform length - outside, extended	10 ft 1 in	3.07 m	10 ft 1 in	3.07 m
Slide-out platform extension deck - length	3 ft	0.91 m	3 ft	0.91 m
D Platform width - outside	2 ft 6.5 in	0.78 m	3 ft 7 in	1.10 m
Guardrail height	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m
Toeboard height	6 in	15 cm	6 in	15 cm
E Machine Height - stowed (folding rails up)	7 ft 10 in	2,39	7 ft 10 in	2,39
Machine Height - stowed (rails lowered)	6 ft 2 in	1.88 m	5 ft 7 in	1.70 m
F Length machine - stowed (with ladder)	7 ft 9 in	2.36 m	7 ft 9 in	2.36 m
Length machine - stowed, extended	11 ft	3.35 m	11 ft	3.35 m
G Width	2 ft 8 in	0.81 m	3 ft 10 in	1.17 m
H Wheelbase	5 ft 10 in	1.78 m	5 ft 10 in	1.78 m
I Ground clearance (center) - pothole guards retracted	5 in	13 cm	5 in	13 cm
I Ground clearance - pothole guards deployed	0.8 in	2 cm	0.8 in	2 cm

Productivity				
Max. platform occupancy (in/out)	2/1		3/1	
Lift capacity	500 lb	227 kg	1,000 lb	454 kg
Lift capacity - extension deck extended	250 lb	113 kg	250 lb	113 kg
Max. platform drive height	25 ft 9 in	7.85 m	25 ft 9 in	7.85 m
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.3 mph	0.5 km/h
Gradeability - stowed(2)	25 %		25 %	
Turning radius - inside/outside	0/6 ft 8 in	0/2.0 m	0/7 ft 4 in	0/2.20 m
Lifting speed - raise/lower	43/39 sec		48/30 sec	
Tilt sensor activation (front to back/side to side)	3° / 1.5°		3° / 1.5°	
Tires - solid non-marking	15×5 in	38×13 cm	15×5 in	38×13 cm

Power				
Power - FLA(3)	24V DC (4×6V 210 Ah)		24V DC (4×6V 210 Ah)	
Power - AGM	24V DC (4×6V 220 Ah)		24V DC (4×6V 220 Ah)	
Power - Lithium-Ion	24V DC (1×24V 90 Ah or 106 Ah)		24V DC (1×24V 90 Ah or 106 Ah)	
Hydraulic tank capacity	3.2 gal	12 L	3.2 gal	12 L

Weight(4) and Floor Loading(5)				
Weight	4,490 lb	2,037 kg	4,286 lb	1,944 kg
Weight max. (adding all possible options)	4,611 lb	2,092 kg	4,406 lb	1,999 kg
Tire load max.	1,797 lb	815 kg	2,314 lb	1,050 kg
Tire contact pressure	119.8 psi	826 kPa	154.3 psi	1,064 kPa
Occupied floor pressure	271 psf	12.96 kPa	199 psf	9.53 kPa

Sound and Vibration Levels				
Sound Pressure level (ground workstation)	< 70 dBA		< 70 dBA	
Sound Pressure level (platform workstation)	< 70 dBA		< 70 dBA	
Vibrations	< 8 ft 2 in/s²	< 2.5 m/s²	< 8 ft 2 in/s²	< 2.5 m/s²

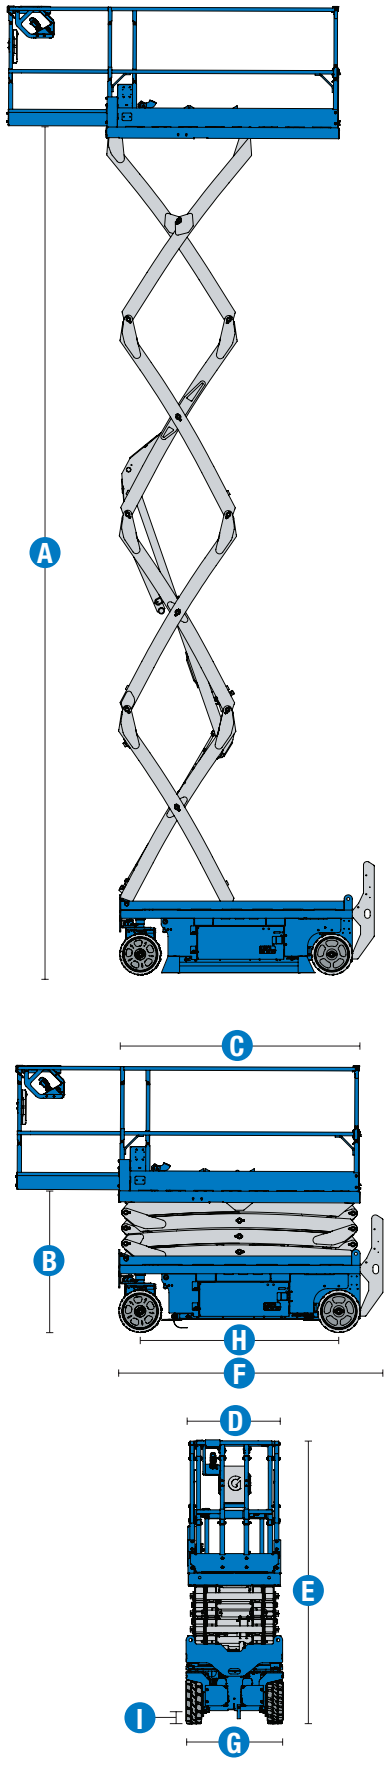

CoMach

Comach Sp. z o. o.
Mail: marcin.chudy@comach.pl
Tel: +48 663-969-900
www.comach.pl
www.dofinansowaniebhp.pl

(1) The metric equivalent of working height adds 2 m to platform height. US adds 6 ft to platform height.
(2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.
(3) Subject to regional availability.
(4) Weight refers to standard configuration and may vary depending on options and/or country standards.
(5) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

Genie® GS™-2632 & GS-2646

SKU: Standard Model

- **GS2632E1CE0072:** GS-2632, E-Drive, 110V, PTP, Folding rails
- **GS2632E1CE0071:** GS-2632, E-Drive, 220V, PTP Ready, Folding rails
- GS-2632, E-Drive, Lithium-Ion*

SKU: Standard Model

- **GS2646E1CE0075:** GS-2646, E-Drive, 110V, PTP, Folding rails
- **GS2646E1CE0076:** GS-2646, E-Drive, 220V, PTP Ready, Folding rails
- GS-2646, E-Drive, Lithium-ion*

* Build to Order

	Option availability	S	S+	BtO
Power	AGM Maintenance-free batteries	✔	✔	✔
	Lithium-Ion battery, 106Ah, UL certified			❍
	Power Inverter		❍	❍
	Rear recessed charger receptacle	✔	✔	✔
Platform	Folding rails, Full-height swing gate (GS-2646)	✔	✔	✔
	Folding rails, Half-height swing gate (GS-2632)	✔	✔	✔
	Slide out extension deck	✔	✔	✔
	Power to platform Pre-arrangement (PTP Ready)	✔	✔	✔
	Power to platform no RCBO		❍	❍
	Power to platform with RCBO		❍	❍
	Air line to platform			❍
	Automotive-style horn		❍	❍
	Descent, tilt and motion alarm	✔	✔	✔
	Diamond plate platform deck	✔	✔	✔
	Dual LED flashing beacons	✔	✔	✔
	Electric horn	✔	✔	✔
	Lanyard attachment points	✔	✔	✔
	Platform control guard (PCON)	✔	✔	✔
	Platform load sense system	✔	✔	✔
	Proportional drive and lift	✔	✔	✔
	SmartLink dual zone control system	✔	✔	✔
Chassis	Telematics-ready		❍	❍
	Lift Connect Telematics		❍	❍
	Lift Connect with Access Manager upgrade		❍	❍
	Eco32 biodegradable hydraulic oil		❍	❍
	Battery Guard - Anti-theft		❍	❍
	Lift Guard White Noise Alarm		❍	❍
	Lift Tools Spill Guard			❍
	Software cut-out while charging (Drive or Drive & Lift)		❍	❍
	Auxiliary platform lowering	✔	✔	✔
	Driveable at full height	✔	✔	✔
	Dual front wheel sealed AC electric drive motors	✔	✔	✔
	Electric brake release	✔	✔	✔
	On board diagnostic system with battery charge indicator	✔	✔	✔
	Pothole protection	✔	✔	✔
	Side and rear fork pockets	✔	✔	✔
	Solid non-marking tires	✔	✔	✔
	Tech Pro Link connector	✔	✔	✔
	Tie-down and lifting points	✔	✔	✔

S Standard
S+ Standard +
BtO Build to Order
✔ Standard Features
❍ Options



Durable Link Stack Design



Platform Ergonomics



Optional Lithium Battery



Genie Genuine Accessories(1)

- Lift Tools Work Tray
- Lift Tools Productivity Tools
- Lift Guard Safety Tools
- Tech Pro Link Handheld Device

(1) More accessories available from Genie Genuine Parts.

CoMach

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.

02/25

Genie®

QUALITY BY DESIGN

© 2025 Terex Corporation

Genie® GS™-3232 & GS-3246

Specifications

Models	GS-3232		GS-3246	
Measurements	**US**	**Metric**	**US**	**Metric**
Working height max. - indoor(1)	37 ft 6 in	11.60 m	37 ft 6 in	11.60 m
Working height max. - outdoor(1)	24 ft	7.49 m	28 ft	8.71 m
A Platform height max. - indoor	31 ft 6 in	9.60 m	31 ft 6 in	9.60 m
A Platform height max. - outdoor	18 ft	5.49 m	22 ft	6.71 m
B Platform height - stowed	4 ft 8 in	1.41 m	4 ft 8 in	1.41 m
C Platform length - outside	7 ft 1 in	2.16 m	7 ft 1 in	2.16 m
C Platform length - outside, extended	10 ft 1 in	3.07 m	10 ft 1 in	3.07 m
Slide-out platform extension deck - length	3 ft	0.91 m	3 ft	0.91 m
D Platform width - outside	2 ft 6.5 in	0.78 m	3 ft 7 in	1.10 m
Guardrail height	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m
Toeboard height	6 in	15 cm	6 in	15 cm
E Machine Height - stowed (folding rails up)	8 ft 3 in	2.52 m	8 ft 3 in	2.52 m
Machine Height - stowed (rails lowered)	6 ft 7 in	2.00 m	6 ft 1 in	1.85 m
F Length machine - stowed (with ladder)	7 ft 9 in	2.36 m	7 ft 9 in	2.36 m
Length machine - stowed, extended	11 ft	3.35 m	11 ft	3.35 m
G Width	2 ft 8 in	0.81 m	3 ft 10 in	1.17 m
H Wheelbase	5 ft 10 in	1.78 m	5 ft 10 in	1.78 m
I Ground clearance (center) - pothole guards retracted	5 in	13 cm	5 in	13 cm
I Ground clearance - pothole guards deployed	0.8 in	2 cm	0.8 in	2 cm

Productivity

Max. platform occupancy (in/out)	2/1		3/1	
Lift capacity	500 lb	227 kg	700 lb	318 kg
Lift capacity - extension deck extended	250 lb	113 kg	250 lb	113 kg
Max. platform drive height	22 ft	6.71 m	31 ft 6 in	9.60 m
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.3 mph	0.5 km/h
Gradeability - stowed(2)	25%		25%	
Turning radius - inside/outside	0/6 ft 8 in	0/2.0 m	0/7 ft 4 in	0/2.20 m
Lifting speed - raise/lower	58/33 sec		65/34 sec	
Tilt sensor activation (front to back/side to side)	3°/1.5°		3°/1.5°	
Max. outrigger leveling (front to back/side to side)	3°/5°		-	
Tires - solid non-marking	15×5 in	38×13 cm	15×5 in	38×13 cm

Power


Power - FLA(3)	24V DC (4×6V 210Ah)		24V DC (4×6V 210Ah)	
Power - AGM	24V DC (4×6V 220Ah)		24V DC (4×6V 220Ah)	
Power - Lithium-Ion	24V DC (1×24V 90Ah or 106Ah)		24V DC (1×24V 90Ah or 106Ah)	
Hydraulic tank capacity	3.5 gal	13.1 L	3.5 gal	13.2 L


Weight(4) and Floor Loading(5)


Weight	5,404 lb	2,451 kg	4,867 lb	2,208 kg
Weight max. (adding all possible options)	5,524 lb	2,506 kg	4,987 lb	2,262 kg
Tire load max.	1,917 lb	870 kg	2,116 lb	960 kg
Tire contact pressure	125.8 psi	867 kPa	141.1 psi	973 kPa
Occupied floor pressure	319 psf	15.27 kPa	209 psf	10.03 kPa

Sound and Vibration Levels

Sound Pressure level (ground workstation)	< 70 dBA		< 70 dBA	
Sound Pressure level (platform workstation)	< 70 dBA		< 70 dBA	
Vibrations	< 8 ft 2 in/s²	< 2.5 m/s²	< 8 ft 2 in/s²	< 2.5 m/s²

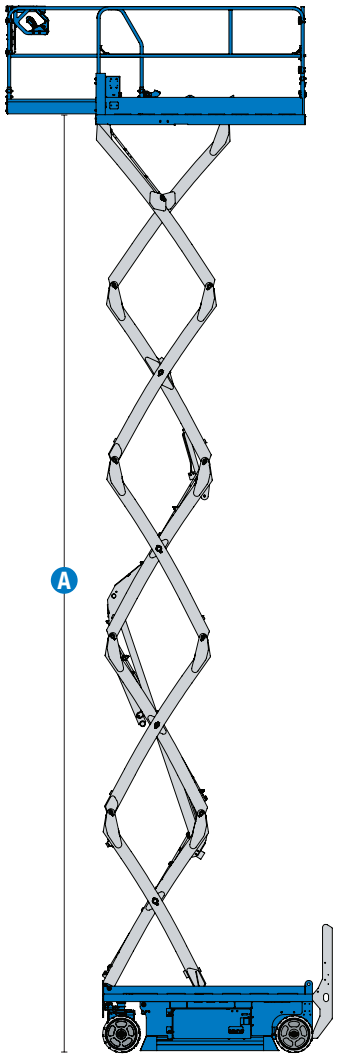





Comach Sp. z o. o.
Mail: marcin.chudy@comach.pl
Tel: + 48 663-969-900
www.comach.pl
www.dofinansowaniebhp.pl

(1) The metric equivalent of working height adds 2 m to platform height. US adds 6 ft to platform height.
(2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.
(3) Subject to regional availability.
(4) Weight refers to standard configuration and may vary depending on options and/or country standards.
(5) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

Genie® GS™-3232 & GS-3246

SKU: Standard Model

- **GS3232E1CE0054:** GS-3232, E-Drive, 110V, PTP, Folding rails, Auto leveling hydraulic outriggers
- **GS3232E1CE0055:** GS-3232, E-Drive, 220V, PTP Ready, Folding rails, Auto leveling hydraulic outriggers
- GS-3232, E-Drive, Lithium-ion*

* Build to Order

SKU: Standard Model

- **GS3246E1CE0069:** GS-3246, E-Drive, 110V, PTP, Folding rails
- **GS3246E1CE0070:** GS-3246, E-Drive, 220V, PTP Ready, Folding rails
- GS-3246, E-Drive, Lithium-ion*

	Option availability	S	S+	BtO
Power	AGM Maintenance-free batteries	✔	✔	✔
	Lithium-Ion battery, 106Ah, UL certified			❍
	Power Inverter		❍	❍
	Rear recessed charger receptacle	✔	✔	✔
Platform	Folding rails, Full-height swing gate (GS-3246)	✔	✔	✔
	Folding rails, Half-height swing gate (GS-3232)	✔	✔	✔
	Slide out extension deck	✔	✔	✔
	Power to platform Pre-arrangement (PTP Ready)	✔	✔	✔
	Power to platform no RCBO		❍	❍
	Power to platform with RCBO		❍	❍
	Air line to platform			❍
	Automotive-style horn		❍	❍
	Descent, tilt and motion alarm	✔	✔	✔
	Diamond plate platform deck	✔	✔	✔
	Dual LED flashing beacons	✔	✔	✔
	Electric horn	✔	✔	✔
	Lanyard attachment points	✔	✔	✔
	Platform control guard (PCON)	✔	✔	✔
	Platform load sense system	✔	✔	✔
	Proportional drive and lift	✔	✔	✔
	SmartLink dual zone control system	✔	✔	✔
Chassis	Telematics-ready		❍	❍
	Lift Connect Telematics		❍	❍
	Lift Connect with Access Manager upgrade		❍	❍
	Eco32 biodegradable hydraulic oil		❍	❍
	Battery Guard - Anti-theft		❍	❍
	Lift Guard White Noise Alarm		❍	❍
	Lift Tools Spill Guard			❍
	Software cut-out while charging (Drive or Drive & Lift)		❍	❍
	Auto leveling hydraulic outriggers (GS-3232)	✔	✔	✔
	Auxiliary platform lowering	✔	✔	✔
	Driveable at full height (GS-3246 only)	✔	✔	✔
	Dual front wheel sealed AC electric drive motors	✔	✔	✔
	Electric brake release	✔	✔	✔
	On board diagnostic system with battery charge indicator	✔	✔	✔
	Pothole protection	✔	✔	✔
	Side and rear fork pockets	✔	✔	✔
	Solid non-marking tires	✔	✔	✔
	Tech Pro Link connector	✔	✔	✔
	Tie-down and lifting points	✔	✔	✔

S Standard
S+ Standard +
BtO Build to Order
✔ Standard Features
❍ Options



Durable Link Stack Design



Platform Ergonomics



Optional Lithium Battery



CoMach

Genie Genuine Accessories(1)

- Lift Tools Work Tray
- Lift Tools Productivity Tools
- Lift Guard Safety Tools
- Tech Pro Link Handheld Device

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.

02/25

Genie®

QUALITY BY DESIGN

© 2025 Terex Corporation

Genie® GS™-4655

Specifications

Models	GS-4655	
Measurements	**US**	**Metric**
Working height max. - indoor[1]	51 ft 9 in	15.95 m
Working height max. - outdoor[1]	27 ft 6 in	8.55 m
A Platform height max. - indoor	45 ft 9 in	13.95 m
A Platform height max. - outdoor	21 ft 6 in	6.55 m
B Platform height - stowed	5 ft 5 in	1.64 m
C Platform length - outside	9 ft 4 in	2.84 m
C Platform length - outside, extended	13 ft 4 in	4.10 m
Slide-out platform extension deck - length	4 ft	1.22 m
D Platform width - outside	4 ft 5 in	1.35 m
Guardrail height	3 ft 7.3 in	1.10 m
Toeboard height	6 in	15 cm
E Machine Height - stowed (folding rails)	9 ft 1 in	2.77 m
Machine Height - stowed (rails lowered)	6 ft 6 in	1.98 m
F Length machine - stowed	10 ft 2 in	3.11 m
F Length machine - stowed, extended	14 ft 2 in	4.33 m
G Width	4 ft 7 in	1.40 m
H Wheelbase	8 ft 1 in	2.47 m
I Ground clearance (center) - pothole guards retracted	5.9 in	15 cm
I Ground clearance - pothole guards deployed	0.75 in	2 cm

Productivity

Max. platform occupancy (in/out)	3/2	
Lift capacity	770 lb	350 kg
Lift capacity - extension deck extended	300 lb	136 kg
Max. platform drive height	45 ft 9 in	13.95 m
Drive speed - stowed	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h
Gradeability - stowed[2]	25 %	
Turning radius - inside/outside	12 in/10 ft	31 cm/3.05 m
Lifting speed - raise/lower	92/58 sec	
Tilt sensor activation (front to back/side to side)	3°/1.5°	
Tires - solid non-marking	15×5 in	38×13 cm

Power


Power	24V DC (4×12V 300Ah)	
Hydraulic tank capacity (E-Drive)	7.5 gal	28.4 L


Weight[3] and Floor Loading[4]


Weight	8,160 lb	3,701 kg
Weight max. (adding all possible options)	8,160 lb	3,701 kg
Tire load max.	3,682 lb	1,670 kg
Tire contact pressure	210 psi	1,451 kPa
Occupied floor pressure	205 psf	9.81 kPa

Sound and Vibration Levels

Sound Pressure level (ground workstation)	< 70 dBA	
Sound Pressure level (platform workstation)	< 70 dBA	
Vibrations	< 8 ft 2 in/s²	< 2.5 m/s²

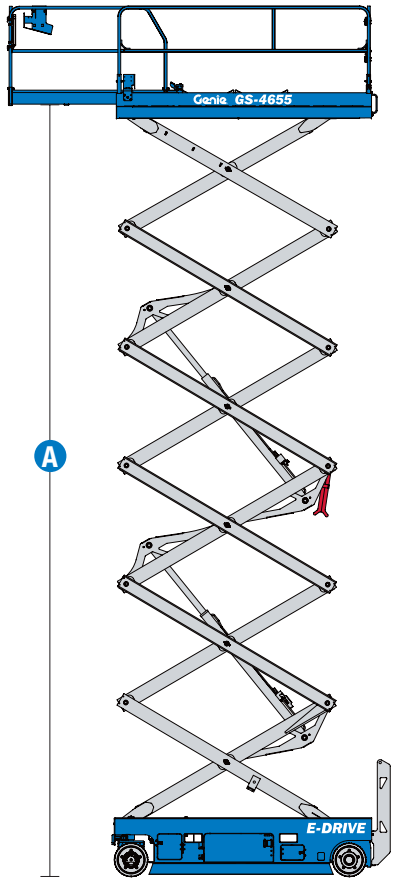

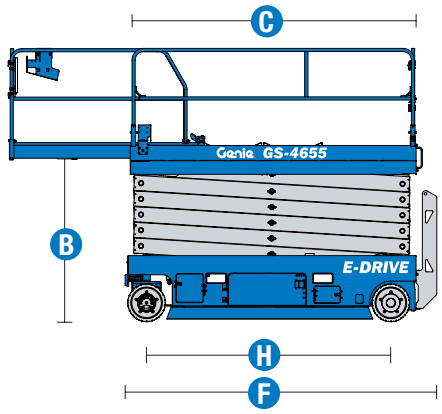



Comach Sp. z o. o.
Mail: marcin.chudy@comach.pl
Tel: + 48 663-969-900
www.comach.pl
www.dofinansowaniebhp.pl

(1) The metric equivalent of working height adds 2 m to platform height. US adds 6 ft to platform height.
(2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.
(3) Weight refers to standard configuration and may vary depending on options and/or country standards.
(4) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

Genie Authorised Distributor
Sales · Parts · Service

Genie® GS™-4655

SKU: Standard Model

- **GS4655E1CE0004:** GS-4655, E-Drive, 110V
- **GS4655E1CE0003:** GS-4655, E-Drive, 220V

* Build to Order

Option availability		S	S+	BtO
Power	Standard FLA flooded lead acid batteries	✔	✔	✔
	AGM Maintenance-free batteries			❍
	Rear recessed charger receptacle	✔	✔	✔
Platform	Folding rails, Full-height swing gate	✔	✔	✔
	Slide out extension deck	✔	✔	✔
	Power to platform, no RCBO	✔	✔	✔
	Power to platform with RCBO		❍	❍
	Air line to platform			❍
	Automotive-style horn		❍	❍
	AC power to platform	✔	✔	✔
	Descent, tilt and motion alarm	✔	✔	✔
	Diamond plate platform deck	✔	✔	✔
	Dual LED flashing beacons	✔	✔	✔
	Electric horn	✔	✔	✔
	Lanyard attachment points	✔	✔	✔
	Platform control guard (PCON)	✔	✔	✔
	Platform load sense system	✔	✔	✔
	Proportional drive and lift	✔	✔	✔
	SmartLink dual zone control system	✔	✔	✔
Chassis	Lift Connect Telematics		❍	❍
	Lift Connect with Access Manager upgrade		❍	❍
	Eco32 biodegradable hydraulic oil		❍	❍
	Lift Guard White Noise Alarm		❍	❍
	Auxiliary platform lowering	✔	✔	✔
	Driveable at full height	✔	✔	✔
	Dual front wheel sealed AC electric drive motors (E-Drive)	✔	✔	✔
	Dual wheel multi-disc brakes	✔	✔	✔
	Electric brake release (E-Drive)	✔	✔	✔
	Manual brake release (Hydraulic Drive)	✔	✔	✔
	On board diagnostic system with battery charge indicator	✔	✔	✔
	Pothole protection	✔	✔	✔
	Side and rear fork pockets	✔	✔	✔
	Solid non-marking tires	✔	✔	✔
	Tech Pro Link connector	✔	✔	✔
	Tie-down and lifting points	✔	✔	✔

S Standard
S+ Standard +
BtO Build to Order
✔ Standard Features
❍ Options




Indoor & Outdoor Use



Max. Lift Capacity



E-Drive

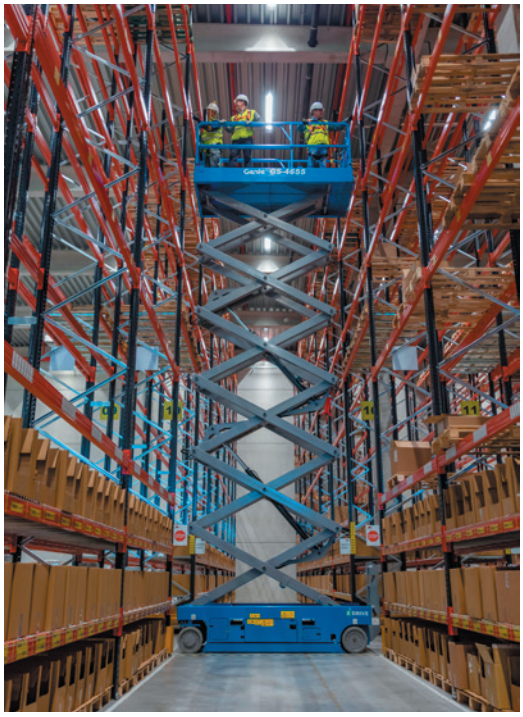

Genie Genuine Accessories(1)

- Lift Tools Productivity Tools
- Lift Connect Telematics
- Tech Pro Link Handheld Device

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.

WWW.HDW-INTL.COM TEL NL: +31 (0)186-277000 TEL BE: +32 (0) 168-17081 TEL PL: +48 (22) 290-3390

CoMach

Genie Authorised Distributor
Sales · Parts · Service