

ZOOMLION

VERTICAL MAST LIFTS

ZMP09J

Comply with CE/GB Standard

HIGHLIGHTS

- ▶ Large work range, leading in industry
- ▶ AC motor drive system, saving energy and maintenance free
- ▶ Mechanic pothole mechanism, easy to pass through
- ▶ Compact size with zero tailswing, easy to access narrow space
- ▶ Standard side fork hole, safe to transfer


FEATURES

Standard Features

Autobrake system	Flashing beacon
Proportional control	Active pothole protection system
All motion alarm	Horn
Charging protection system	Differential control
Self-closing entry gate	Hour meter
Maintenance-free battery	On-board diagnostic
Drivable at full height	Over tilt protective system
Emergency descent system	Forklift pockets
Emergency stop button	Load sensing system

Accessories & Options

- ▶ Platform work light
- ▶ AC power to platform
- ▶ GPS
- ▶ Remote monitor and rental management platform



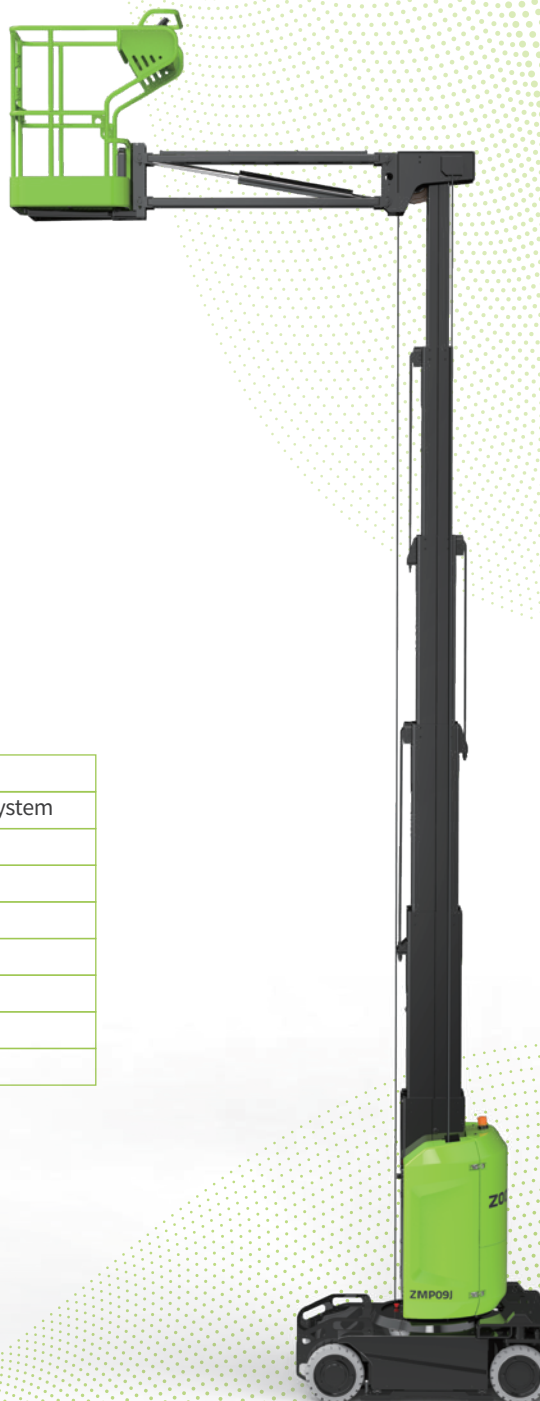


VERTICAL MAST LIFTS

ZMP09J

Comply with CE/GB Standard

Model	ZMP09J	
	Imperial	Metric
Size		
Max Work Height	36ft 10in	11.2m
Max Platform Height	30ft 2in	9.2m
Max Platform Horizontal Outreach	10ft 7in	3.23m
Max Up and Over Height	25ft 6in	7.75m
A - Stowed Length	8ft 10in	2.7m
B - Stowed Width	3ft 3in	1m
C - Stowed Height	6ft 6in	1.99m
D - Platform Length	2ft 6in	0.76m
E - Platform Width	3ft 3in	0.99m
F - Wheelbase	3ft 11in	1.2m
G - Ground Clearance (Stowed)	2.6in	0.065m
H - Ground Clearance (Raised)	0.6in	0.015m
Performance		
Platform Capacity	441lb	200kg
Max. Number of Workers (indoor/outdoor)	2/1	2/1
Drive Speed (Stowed)	2.80mph	4.5km/h
Drive Speed (Raised)	0.31mph	0.5km/h
Turning Radius (Inside)	8in	0.2m
Turning Radius (Outside)	5ft 4in	1.61m
Lifting Motor	AC 24V/3kW	
Drive Motor	AC 24V/2x0.7kW	
Up/Down Time	42/40s	
Gradeability	25% (14°)	
Max. Working Slope (Lateral/Vertical)	2.5°	
Jib Rotation	125°	
Tail Swing	0	
Tire	Solid seamless tire	
Power		
Battery	4×6V/240Ah	
Charger	24V/30A	
Weight		
Gross	6600lb	2995kg

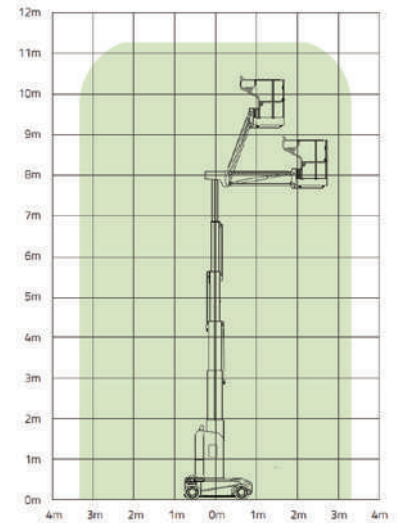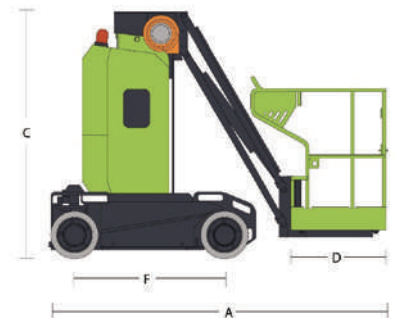

ZOOMLION

VERTICAL MAST LIFTS

ZMP04/ZMP06

HIGHLIGHTS

- ▶ Permanent magnet synchronous traveling motor, energy saving and high efficiency
- ▶ Standard large-diameter tires and collectable pothole plates, easy to pass the threshold
- ▶ Front wheel driving and steering and small turning radius for flexible indoor movement
- ▶ Multi-arm synchronous lifting, fast and no impact
- ▶ Compact dimensions, access to lifts, and ideal for indoor applications

FEATURES

Standard Features

Autobrake system	Emergency stop button
Proportional control	Flashing beacon
All motion alarm	Active pothole protection system
Charging protection system	Horn
Self-closing entry gate	On-board diagnostic
Maintenance-free battery	Hour meter
Unidirectional extension platform	Load sensing system
Drivable at full height	Over tilt protective system
Emergency descent system	Forklift pockets

Accessories & Options

- ▶ Platform work light
- ▶ AC power to platform
- ▶ GPS

ACCESS WITH ZOOMLION GREEN

Phone: 0086(731)-88353692
E-mail: awp@zoomlion.com

Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China
Web: www.zoomlion-access.com




ZOOMLION

GoMach

@ marcin.chudy@comach.pl
Tel +48 663-969-900
www.comach.pl www.dofinansowaniebhp.pl

Model	ZMP04	ZMP06
Size		
Work height	5.82m	7.91m
A - Platform Height-Elevated	3.82m	5.91m
B - Platform Height-Stowed	0.6m	0.6m
C - Platform Length	1.02m	1.02m
D - Platform Width	0.76m	0.76m
K-Platform Extension	0.5m	0.5m
E - Overall Height	1.72m	1.99m
F - Overall Length	1.39m	1.39m
G - Overall Width	0.78m	0.78m
H - Wheelbase	1.06m	1.06m
I - Ground Clearance (Stowed)	0.065m	0.065m
J - Ground Clearance (Raised)	0.017m	0.017m
Performance		
Platform Capacity	230kg	200kg
Capacity on Deck Extension	113kg	113kg
Max. Number of Workers (indoor/outdoor)	2/1	1/0
Drive Speed (Stowed)	4km/h	4km/h
Drive Speed (Raised)	0.5km/h	0.5km/h
Turning Radius (Inside)	0.14m	0.14m
Turning Radius (Outside)	1.43m	1.43m
Lifting Motor	24V/2.5KW	24V/2.5KW
Drive Motor	24V/2×0.6KW	24V/2×0.6KW
Up/Down Time	16/18s	25/30s
Gradeability	25% (14°)	25% (14°)
Max. Working Slope (Lateral/Vertical)	1.5°/3°	1.5°/3°
Control	Proportional control	Proportional control
Drive	Front wheels	Front wheels
Brake	Front wheels	Front wheels
Tire	Solid seamless tire	Solid seamless tire
Power		
Battery	2×12V/120Ah	2×12V/120Ah
Charger	24V/20A	24V/20A
Weight		
Gross	900kg	1085kg

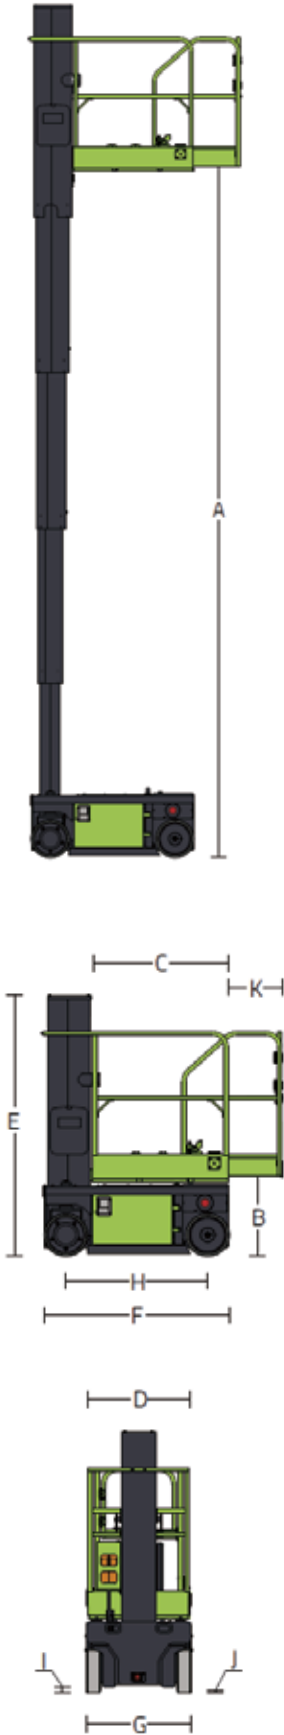

ZOOMLION ACCESS reserves the right to make specification and/or equipment changes without prior notification.
Product specifications are updated to June, 2024.

Genie® AWP™-20S, AWP-25S, AWP-30S, AWP-36S & AWP-40S

Specifications

Models	AWP-20S		AWP-25S		AWP-30S	
Measurements	US	METRIC	US	METRIC	US	METRIC
Working height max. ⁽¹⁾	26 ft 1 in	8.0 m	30 ft 11 in	9.4 m	35 ft 6 in	10.8 m
Platform height	20 ft 1 in	6.1 m	24 ft 11 in	7.6 m	29 ft 6 in	9.0 m
A Height - stowed (standard)	6 ft 6 in	1.98 m	6 ft 6 in	1.98 m	6 ft 6 in	1.98 m
B Height Tilted back ⁽²⁾ (standard)	-	-	-	-	-	-
C Length - stowed (standard)	4 ft 1 in	1.24 m	4 ft 3.5 in	1.31 m	4 ft 5 in	1.35 m
D Length - tilted back ⁽²⁾	-	-	-	-	-	-
E Width	2 ft 5 in	0.74 m	2 ft 5 in	0.74 m	2 ft 5 in	0.74 m

Productivity

Lift capacity	350 lb	159 kg	350 lb	159 kg	350 lb	159 kg
F G Outrigger footprint (l/w) (standard)	5 ft 1 in/4 ft 5 in	1.55/1.35 m	5 ft 9 in/5 ft 1 in	1.75/1.55 m	6 ft 4 in/5 ft 8 in	1.93/1.73 m
H Corner access ⁽³⁾ (standard)	1 ft 3 in	0.38 m	1 ft 7 in	0.48 m	1 ft 10 in	0.56 m
I J Wall access front/side (standard)	6 in/1 ft 1 in	0.15/0.33 m	7 in/1 ft 5 in	0.18/0.43 m	8 in/1 ft 9 in	0.20/0.53 m
Standard platform dimensions (l/w/h)	27/26/44.75 in	0.69/0.66/1.14 m	27/26/44.75 in	0.69/0.66/1.14 m	27/26/44.75 in	0.69/0.66/1.14 m
Gated standard platform dimensions (l/w/h)	27/26/44.75 in	0.69/0.66/1.14 m	27/26/44.75 in	0.69/0.66/1.14 m	27/26/44.75 in	0.69/0.66/1.14 m
Gated narrow platform dimensions (l/w/h)	26/20/44.75 in	0.66/0.51/1.14 m	26/20/44.75 in	0.66/0.51/1.14 m	26/20/44.75 in	0.66/0.51/1.14 m

Weight and Floor Loading⁽⁴⁾

AC models	677 lb	307 kg	727 lb	330 kg	777 lb	352 kg
DC models	766 lb	347 kg	817 lb	371 kg	867 lb	393 kg
Occupied floor pressure	0.35 psi	2.40 kPa	0.28 psi	1.90 kPa	0.24 psi	1.65 kPa

Models	AWP-36S		AWP-40S	
Measurements	US	METRIC	US	METRIC
Working height max. ⁽¹⁾	42 ft 5 in	12.90 m	46 ft 4 in	14.10 m
Platform height	36 ft 5 in	11.10 m	40 ft 4 in	12.30 m
A Height - stowed (standard)	9 ft 1.5 in	2.78 m	9 ft 1.5 in	2.78 m
B Height Tilted back ⁽²⁾ (standard)	6 ft 3.5 in	1.92 m	6 ft 6 in	1.98 m
C Length - stowed (standard)	4 ft 7 in	1.40 m	4 ft 8 in	1.42 m
D Length - tilted back ⁽²⁾	9 ft 9 in	2.97 m	9 ft 9 in	2.97 m
E Width	2 ft 5 in	0.74 m	2 ft 5 in	0.74 m

Productivity

Lift capacity	350 lb	159 kg	300 lb	136 kg
F G Outrigger footprint (l/w) (standard)	6 ft 11 in/6 ft 3 in	2.12/1.91 m	7 ft 5 in/6 ft 9 in	2.26/2.06 m
H Corner access ⁽³⁾ (standard)	2 ft 5 in	0.74 m	2 ft 7 in	0.79 m
I J Wall access front/side (standard)	1 ft 2 in/2 ft 1 in	0.36/0.64 m	1 ft 3 in/2 ft 4 in	0.38/0.71 m
Standard platform dimensions (l/w/h)	27/26/44.75 in	0.69/0.66/1.14 m	27/26/44.75 in	0.69/0.66/1.14 m
Gated standard platform dimensions (l/w/h)	27/26/44.75 in	0.69/0.66/1.14 m	27/26/44.75 in	0.69/0.66/1.14 m
Gated narrow platform dimensions (l/w/h)	26/20/44.75 in	0.66/0.51/1.14 m	26/20/44.75 in	0.66/0.51/1.14 m

Weight and Floor Loading⁽⁴⁾


AC models	1,017 lb	461 kg	1,040 lb	472 kg
DC models	1,107 lb	502 kg	1,130 lb	513 kg
Occupied floor pressure	0.23 psi	1.60 kPa	0.20 psi	1.37 kPa

Power

Power source - AC models	110V/50-60 Hz
	220V/50-60 Hz
Power source - DC models	12V DC

Sound and Vibration Levels

Sound Pressure level (ground workstation)	< 70 dBA
Sound Pressure level (platform workstation)	< 70 dBA
Vibrations	< 2.5 m/s ²

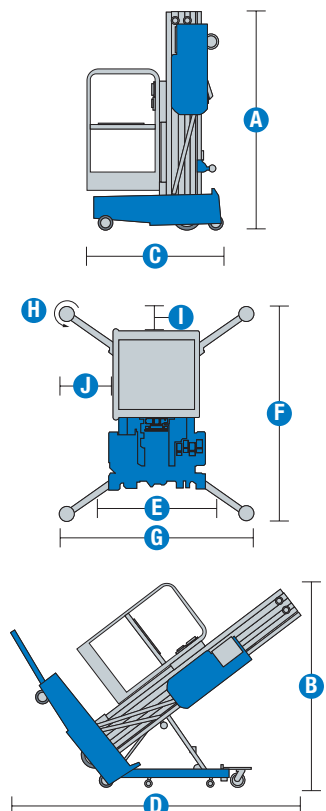

Comach Sp. z o. o.
 Mail: marcin.chudy@comach.pl
 Tel: +48 663-969-900
www.comach.pl
www.dofinansowaniebhp.pl

(1) The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

(2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.

(3) Weight refers to standard configuration and may vary depending on options and/or country standards.

(4) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

Genie® AWP™-20S, AWP-25S, AWP-30S, AWP-36S & AWP-40S

SKU: Stock Models

- **AWP20S01CE0001:** AWP-20S, AC Power
- **AWP25S01CE0004:** AWP-25S, AC Power
- **AWP30S01CE0004:** AWP-30S, AC Power
- AWP-36S, AC Power with Tilt-back frame*
- **AWP40S01CE0004:** AWP-40S, AC Power with Tilt-back frame

* Build to Order

SKU: Stock Models

- AWP-20S, DC Power*
- AWP-25S, DC Power*
- **AWP30S01CE0005:** AWP-30S, DC Power
- AWP-36S, DC Power with Tilt-back frame*
- AWP-40S, DC Power with Tilt-back frame*

Option availability		S	S+	BtO
Power	Wet battery (DC - only for AWP-30S)	✓	✓	✓
	Dry battery (DC)			○
	110V/50Hz			○
	220V/50Hz	✓	✓	✓
	12V 110/230V 50-60Hz worldwide smart charging system	✓	✓	✓
Platform	Sliding mid-rail standard platform	✓	✓	✓
	Gated standard platform			○
	Gated narrow platform			○
	Descent light and alarm package		○	○
	Tool tray		○	○
	AC power to platform	✓	✓	✓
Chassis	Standard base for all models	✓	✓	✓
	Auxiliary platform lowering	✓	✓	✓
	Easy operation: rolls through standard doorways	✓	✓	✓
	Fast load into pickup trucks	✓	✓	✓
	Forklift pockets (Standard base only)	✓	✓	✓
	Ground fault interrupt	✓	✓	✓
	Heavy-duty design and mast	✓	✓	✓
	LED lights confirm proper set-up	✓	✓	✓
	Outrigger storage pockets	✓	✓	✓
	Rocker base system for maneuverability	✓	✓	✓
	Standard outriggers	✓	✓	✓
	Tie-down attachment points	✓	✓	✓
	Lift Guard White Noise Alarm		○	○

- S Standard
- S+ Standard +
- BtO Build to Order
- ✓ Standard Features
- Options



Lightweight



Easy to Load and Transport



Low Floor Loading



Genie Genuine Accessories⁽¹⁾

- Platform-locating laser light
- Fluorescent tube caddy

(1) More accessories available from Genie Genuine Parts.

CoMach

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.