



Schrottscheren

S6I-MS260R - S52I-MS1000R



www.steck.de



YouTube



Facebook




Instagram



TikTok

Schrottscheren

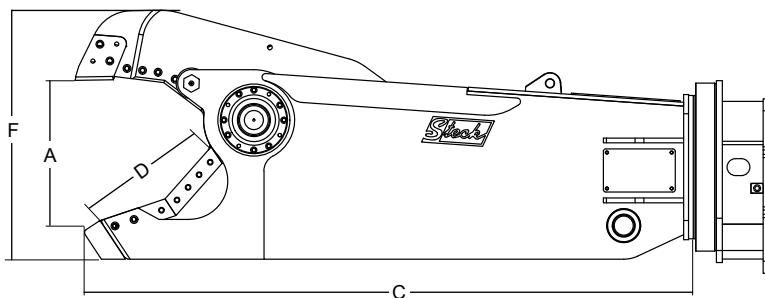


Technische Daten

	S6I- MS260R	S10I- MS360R	S17I- MS460R	S25I- MS610R	S38I- MS810R	S52I- MS1000R
Baggerdienstgewicht, Stiel (t)	6 - 10	10 - 15	20 - 25	20 - 40	30 - 60	40 - 80
Baggerdienstgewicht, Ausleger (t)	3 - 10	6 - 15	10 - 25	18 - 40	20 - 60	25 - 80
Gewicht, ohne Kopfplatte (kg)	580	1.166	1.680	2.522	3.766	5.266
A - Maulöffnung (mm)	250	360	480	622	800	1.030
C - Gesamtlänge (mm)	1.880	2.459	2.900	2.538	3.725	3.891
D - Maultiefe (mm)	310	450	498	640	736	1.000
Gesamtbreite (mm)	556	600	640	720	840	899
F - Gesamthöhe (mm)	448	716	981	1.036	1.314	1.508
Schneidlänge (mm)	252	392	485	557	636	875
Schließkraft Punkt G ₁ (t)	160	176	360	610	930	1.200
Schließkraft Punkt G ₂ (t)	80	85	165	266	410	485
Schließkraft Punkt G ₃ (t)	40	50	90	130	205	250
Druck (bar)	260	270	320	320	320	320
drehen P _{max} (bar)	115	115	115	115	115	115
drehen (l/min)	25	25	25	25	25	50 - 60
Öffnen / Schließen (l/min)	70 - 100	70-100	100-200	150-250	300-500	600 - 800

Schneidleistung

	S6I- MS260R	S10I- MS360R	S17I- MS460R	S25I- MS610R	S38I- MS810R	S52I- MS1000R
• Rundstab (mm)	40	50	50	60	70	75
○ Stahlrohr (mm)	4x80	5x120	5x150	6x200	6x300	6x350
≡ Träger (mm)	8x150x100	15x400x200	16x500x200	20x700x300	20x800x300	22x 90 x300
— Profil (mm)	6	10	14	18	20	20
Stahlplatte (mm)	20x100	25x100	30x150	40x130	60x100	70x120

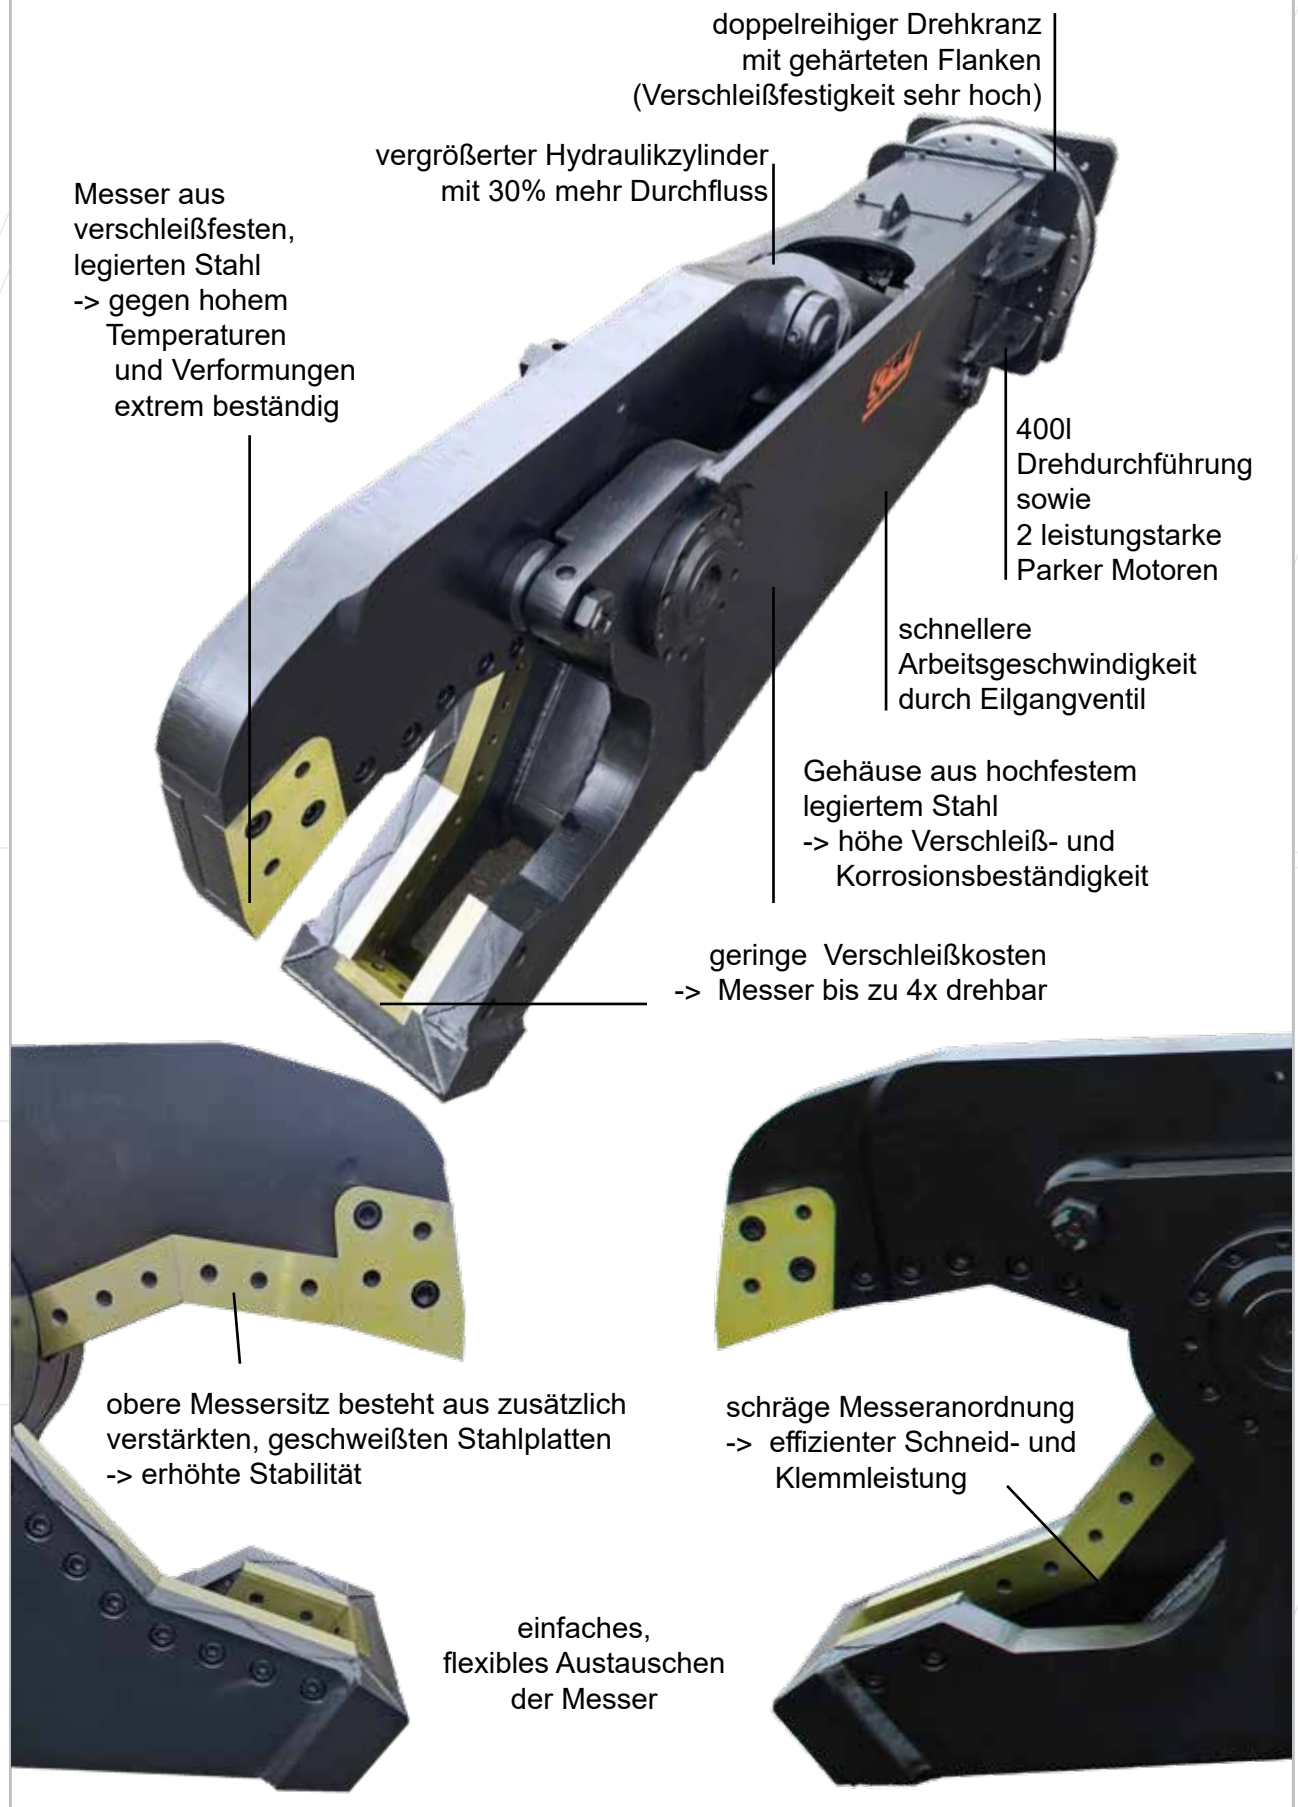

Steck Abbruchgeräte GmbH
Hauptstr. 20
D- 89192 Rammingen

Tel. +49 (0) 7345 9123 - 0
Fax +49 (0) 7345 9123 - 20
E-Mail info@steck.de
Internet www.steck.de

Ihr Ansprechpartner:

