



LIGHTLIFT 20.10 PERFORMANCE IIISM MK3

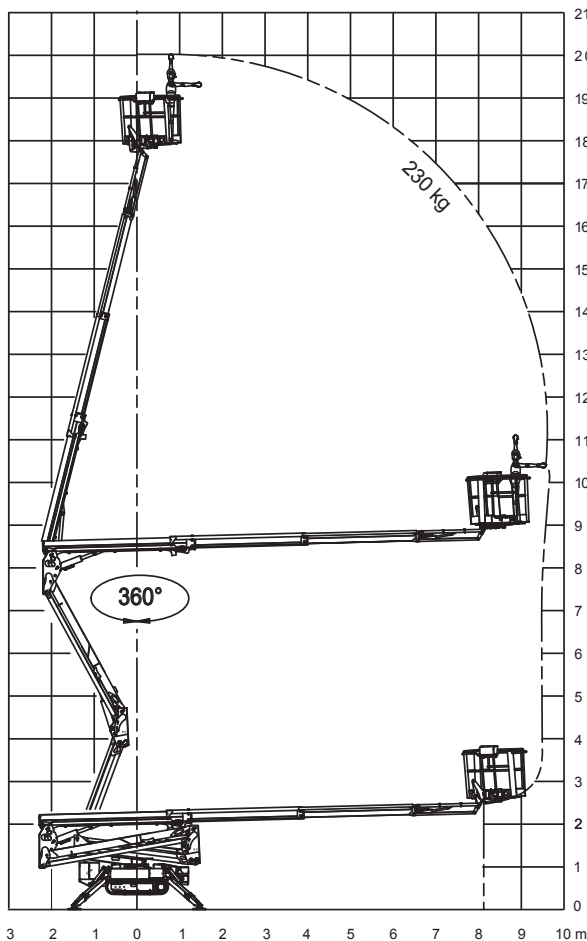

20,15 m

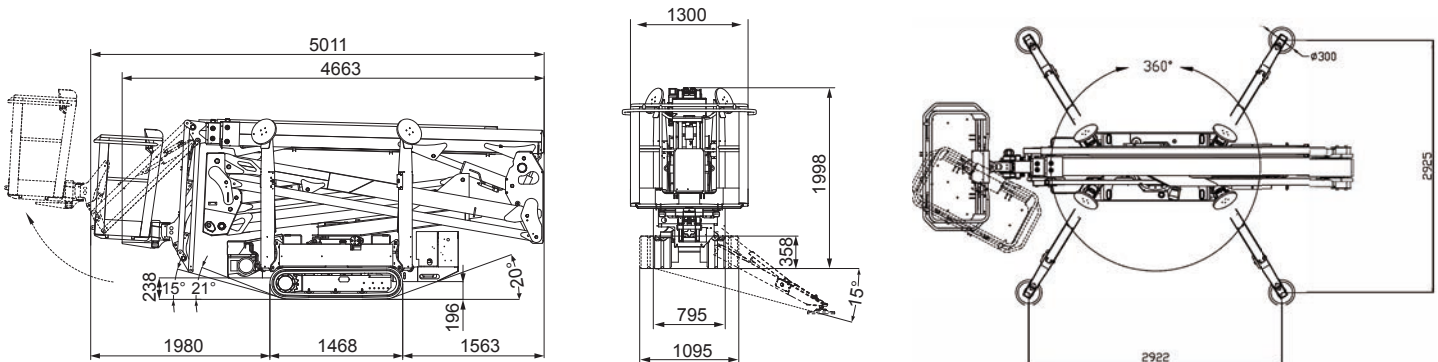

9,70 m



5,01 m



4,66 m



1,99 m



1335x690x1100 mm



124° (+/-62°)



16° / 28,7%



2.900 kg (Honda)
2.970 kg (Kubota)
3.000 kg (Lithium-ion)
3.100 kg (Bi-energy)



Honda iGX 390- 11,7 PS
3600 UpM,
Kubota Z 602 - 14,5 PS
3200 UpM



230 V / 50 Hz - 2,2 kW
110 V / 50 Hz - 2,2 kW



795 - 1095 mm



0,5- 1,3 - 2,5 Km/h



2150 daN - 3,04 daN/cm²



2922 x 2925 mm



IIISM - Abstütz- und Einfahr-
automatik serienmäßig



Remote control
Kabelfernbedienung



GPRS-GPS



R.A.H.M.



100 Ah / 72 V
Optional - Optional

