



LIGHTLIFT 26.14 *PERFORMANCE III S*

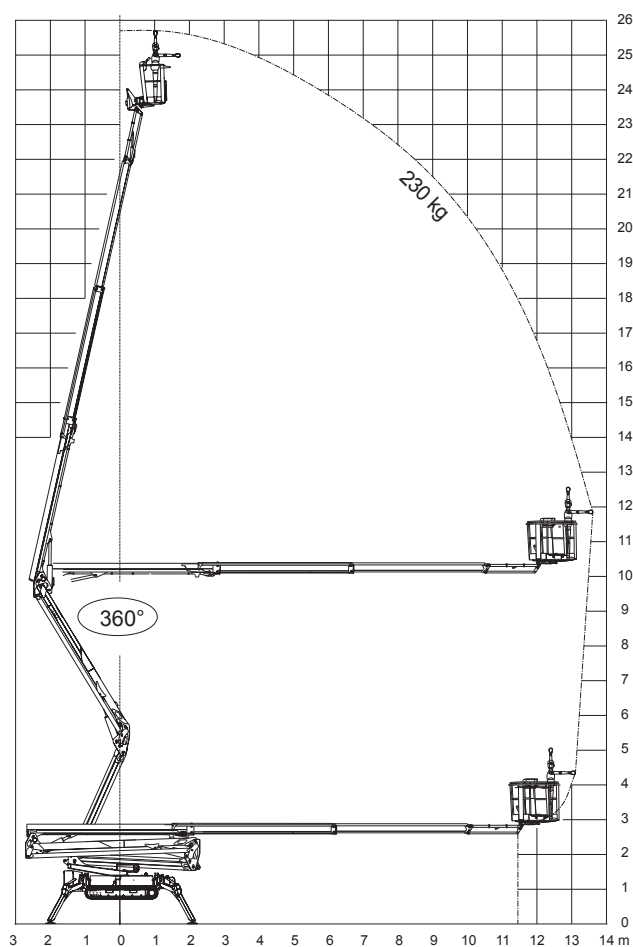

	25,70 m		230 V / 50 Hz - 2,2 kW 110 V / 50 Hz - 2,2 kW
	13,75 m		990 / 1490 mm
	6,34 m		1,1 - 2,0 Km/h
	5,98 m		3124 daN - 4,42 daN/cm ²
	1,98 m		4079 x 3978 mm (5451 x 2502 mm)
	1335x690x1100 mm		III S - Abstütz- und Einfahr- automatik serienmäßig
	124° (+/-62°)		Remote control Kabelfernbedienung
	16° / 28,7%		GPRS-GPS
	4365 kg / 9623 lb 4384 kg / 9665 lb (Lithium)		R.A.H.M.
	Kubota D 902 - 21,6 PS 3200 UpM		100 Ah / 83 V Optional - Optional

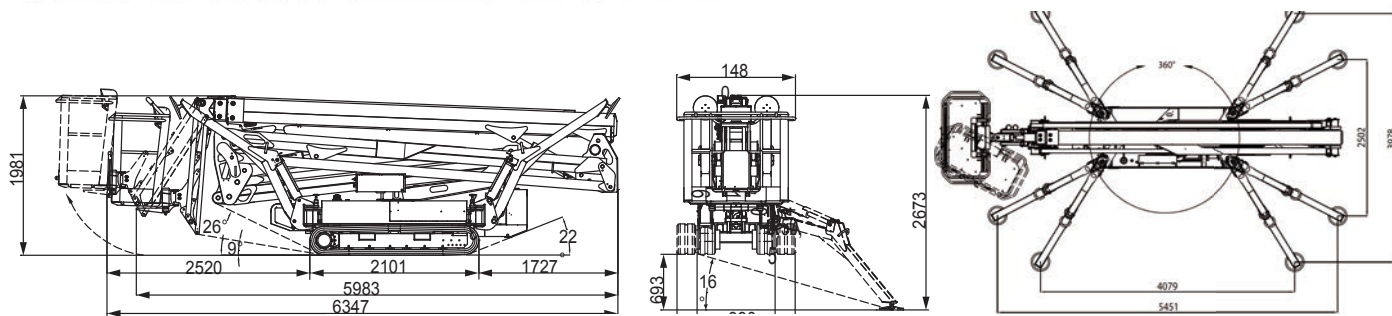