

With Us, You can



HIGH GREEN SAFE

 25 m

 12,8 m

 250 kg

 Bi-energy
Eco
Hybrid

 Crawlers
 Wheels



SPIDER LIFT

AVAILABLE OPTIONS

STANDARD EQUIPMENT

- Hydraulic steering and transmission with 2 speeds
- Rubber tracks with hydraulically variable external width
- Independent outriggers rotating on 2 different positions
- Automatic set-up with self-levelling
- Turntable rotation at 660°
- CANBUS electronics
- Steel made telescopic boom + fixed jib
- Hydraulic and electric lines inside the boom
- Air / water supplementary line along the boom with internal hose
- Removable aluminium alloy aerial cage 180x70x110 cm
- Cage with hydraulic rotation 90° + 80°
- "Area manager" limiting device for safe working load 120 and 250 kg
- Load sensor on the cage
- Cable control at the ground + electric control at the cage
- 230 VAC electric plug on the cage
- PalSystem with touchscreen monitor for diagnostics and monitoring of operating parameters
- CE Mark homologation certificates, manuals, stickers and spares book in English language



HYDRAULIC WINCH 500 KG
WITH 25 m ROPE AND SUPPORT



INSTALLATION KIT FOR HYDRAULIC WINCH 500 KG
"RETURN TO HOME" FUNCTION INCLUDED



QUICK PIPES COUPLING KIT FOR HYDRAULIC WINCH 500 KG



COMPACT BASKET SUPPORT
4 CASTORS UNDER THE CAGE INCLUDED



BASKET ANTI-COLLISION KIT WITH ULTRASONIC SENSORS AND LASERS



NON-MARKING TRACKS



CONTROL FOOT PEDAL ON THE CAGE



4 CASTORS UNDER THE CAGE



CAGE FOR ONE MAN 70x70x110 CM



PADS FOR OUTRIGGERS



"RETURN TO HOME" FUNCTION



DIAGNOSTIC CABLE KIT



GROUNDING CABLE INSIDE THE BOOM



CUSTOMIZED COLOURS



LED LIGHT




RADIO CONTROL



INTER-PHONIC COMMUNICATION SYSTEM



ELECTRONIC ANEMOMETER



LIFTING HOOK IN PLACE OF THE BASKET



DISPLAY IN THE BASKET



DRINK HOLDER IN THE BASKET



HANDS HEATER IN THE BASKET



EMERGENCY ELECTROPUMP KIT



3 kW - 230 VAC ELECTRIC GENERATOR



36 MONTHS OF WARRANTY ON THE BATTERY










BI-ENERGY

 Diesel
14,7 kW

 Single-phase
Electric motor
230 VAC - 2,2 kW

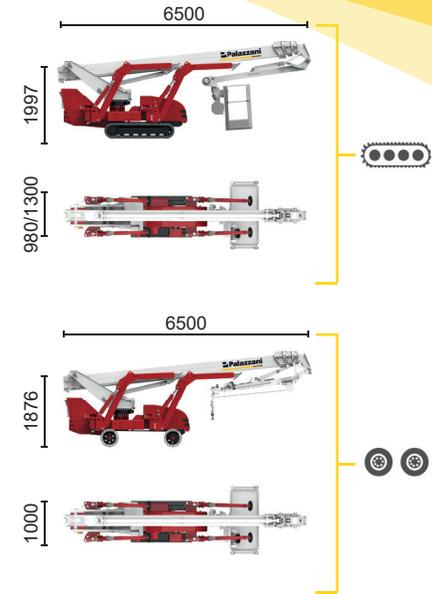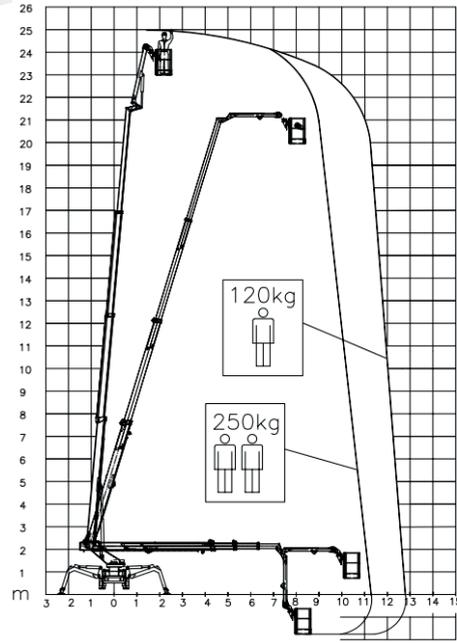

11,3 m	12,8 m	6,6 m	L1	L2	W1	W2	W3
250 kg	120 kg	250/120 kg	4971 mm	6542 mm	4853 mm	3732 mm	2610 mm



TSJ 25/C		25 m	12,8 m	250 kg	660°	180x70 cm	90°+80°	2,61-4,85 m	32%	36%	1 km/h	3950 kg	26 kN	1,63 kN/m ²	3,38 kN/m ²
TSJ 25/R		25 m	12,8 m	250 kg	660°	180x70 cm	90°+80°	2,61-4,85 m	32%	19%	1 km/h	3950 kg	26 kN	1,63 kN/m ²	3,38 kN/m ²

Available power options:

ECO (AC+BATTERY)

HYBRID² (DIESEL+AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it





NC 902 A 24



BI-ENERGY

 Diesel
14,7 kW

 Single-phase
Electric motor
230 VAC - 2,2 kW

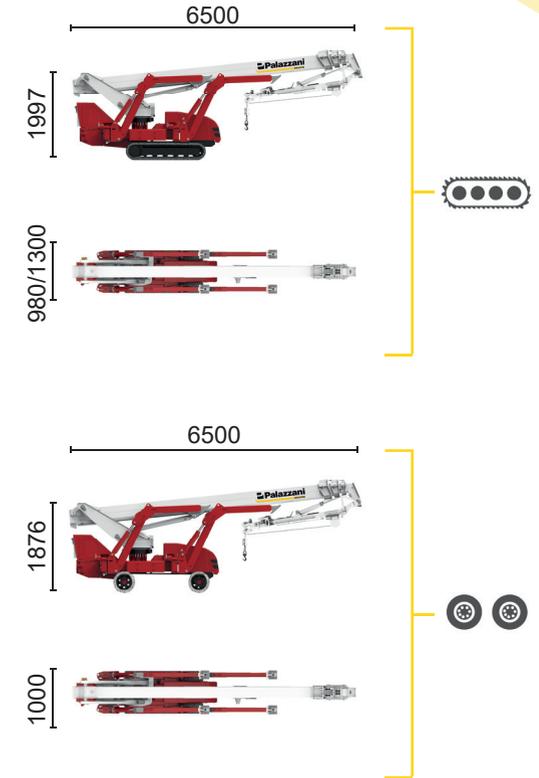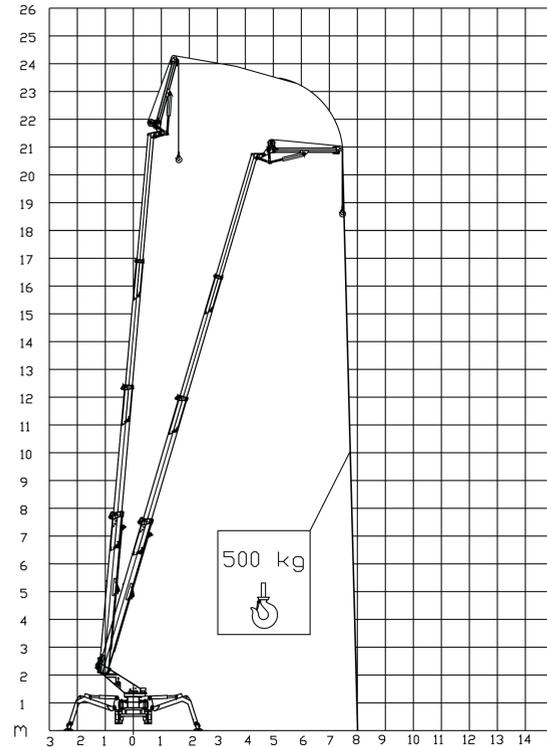

TSJ 25/C		23,5 m	8,5 m	500 kg	660°	180x70 cm	90°+80°	2,61-4,85 m	32%	36%	1 km/h	3950 kg	26 kN	1,63 kN/m ²	3,38 kN/m ²
----------	---	--------	-------	--------	------	-----------	---------	-------------	-----	-----	--------	---------	-------	------------------------	------------------------

TSJ 25/R		23,5 m	8,5 m	500 kg	660°	180x70 cm	90°+80°	2,61-4,85 m	32%	19%	1 km/h	3950 kg	26 kN	1,63 kN/m ²	3,38 kN/m ²
----------	---	--------	-------	--------	------	-----------	---------	-------------	-----	-----	--------	---------	-------	------------------------	------------------------

Available power options:

ECO (AC+BATTERY)

HYBRID² (DIESEL+AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 903 A 24








ECO



Inverter actuated
Electric motor
5,5 kW



Lithium iron
phosphate battery
LiFePO4

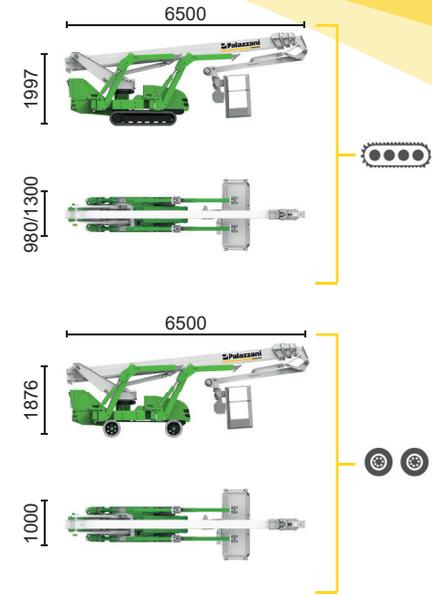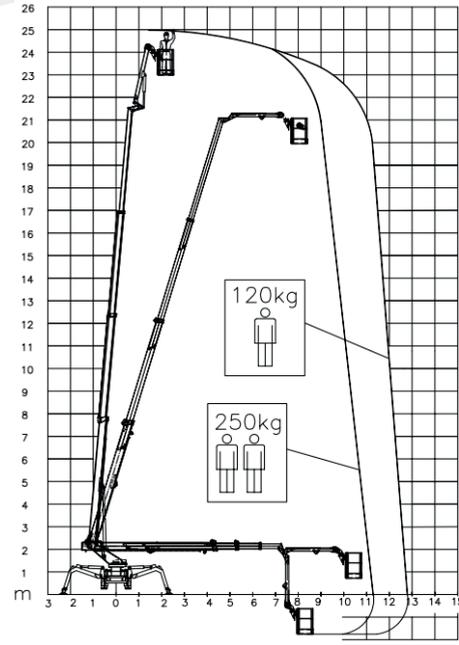

11,3 m	12,8 m	6,6 m	L1	L2	W1	W2	W3
250 kg	120 kg	250/120 kg	4971 mm	6542 mm	4853 mm	3732 mm	2610 mm



TSJ 25/C	25 m	12,8 m	250 kg	660°	180x70 cm	90°+80°	2,61-4,85 m	32%	36%	1 km/h	3950 kg	26 kN	1,63 kN/m ²	3,38 kN/m ²
TSJ 25/R	25 m	12,8 m	250 kg	660°	180x70 cm	90°+80°	2,61-4,85 m	32%	19%	1 km/h	3950 kg	26 kN	1,63 kN/m ²	3,38 kN/m ²

Available power options:

BI-ENERGY (DIESEL+AC)

HYBRID² (DIESEL+AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 904 A 24






ECO



Inverter actuated
Electric motor
5,5 kW



Lithium iron
phosphate battery
LiFePO4

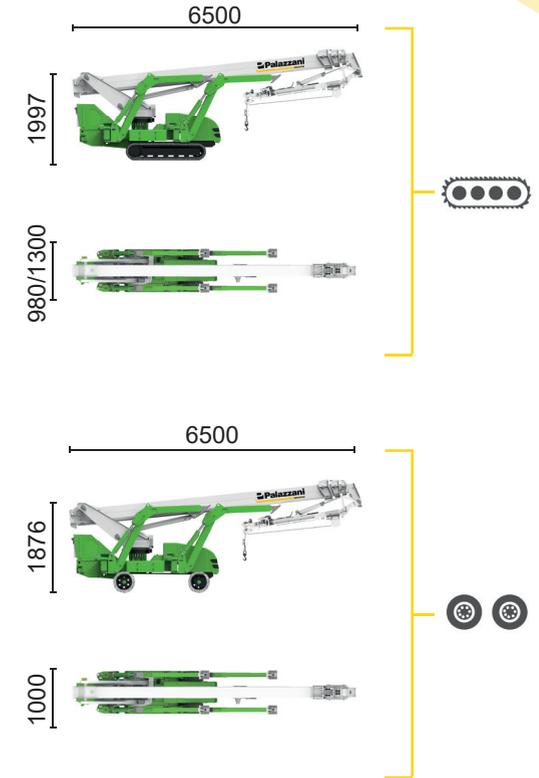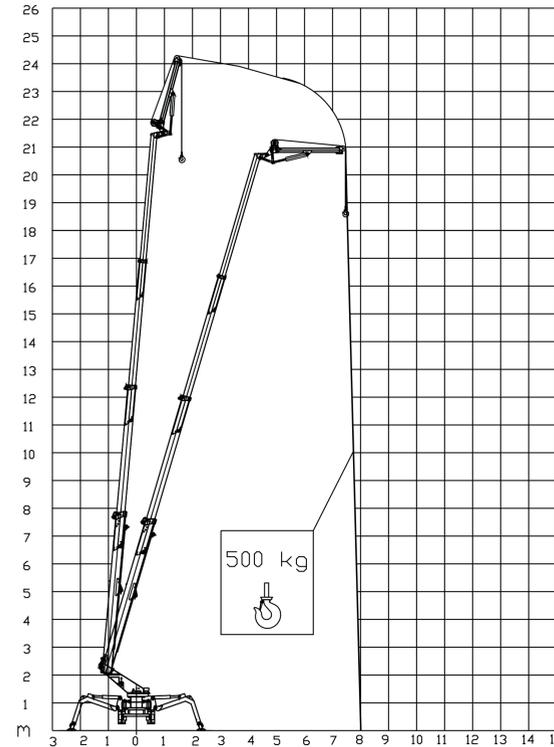

TSJ 25/C		23,5 m	8,5 m	500 kg	660°	180x70 cm	90°+80°	2,61-4,85 m	32%	36%	1 km/h	3950 kg	26 kN	1,63 kN/m ²	3,38 kN/m ²
-----------------	--	--------	-------	--------	------	-----------	---------	-------------	-----	-----	--------	---------	-------	------------------------	------------------------

TSJ 25/R		23,5 m	8,5 m	500 kg	660°	180x70 cm	90°+80°	2,61-4,85 m	32%	19%	1 km/h	3950 kg	26 kN	1,63 kN/m ²	3,38 kN/m ²
-----------------	--	--------	-------	--------	------	-----------	---------	-------------	-----	-----	--------	---------	-------	------------------------	------------------------

Available power options:

BI-ENERGY (DIESEL+AC)

HYBRID² (DIESEL+AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 905 A 24



HYBRID²








Diesel
10,6 kW




Inverter actuated
Electric motor
5,5 kW



Lithium iron
phosphate battery
LiFePO4 - 10,7 kWh
(48 V - 210 Ah)

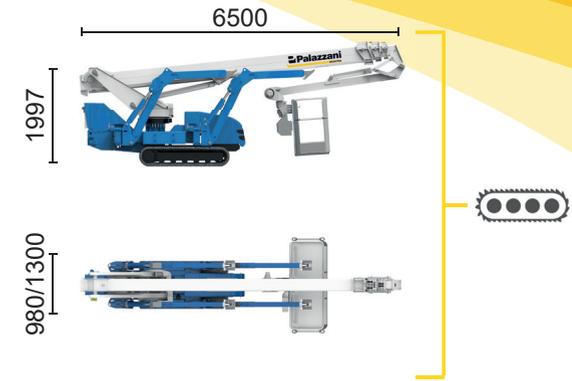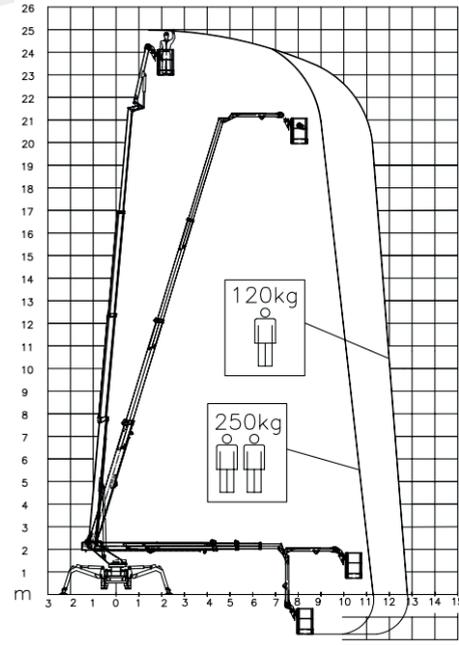

11,3 m	12,8 m	6,6 m	L1	L2	W1	W2	W3
250 kg	120 kg	250/120 kg	4971 mm	6542 mm	4853 mm	3732 mm	2610 mm



TSJ 25/C 25 m 12,8 m 250 kg 660° 180x70 cm 90°+80° 2,61-4,85 m 32% 36% 1,2 km/h 4335 kg 26 kN 1,8 kN/m² 3,71 kN/m²

Available power options:

BI-ENERGY (DIESEL+AC)

ECO (AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 906 A 24



HYBRID²





Diesel
10,6 kW



Inverter actuated
Electric motor
5,5 kW



Lithium iron
phosphate battery
LiFePO4 - 10,7 kWh
(48 V - 210 Ah)

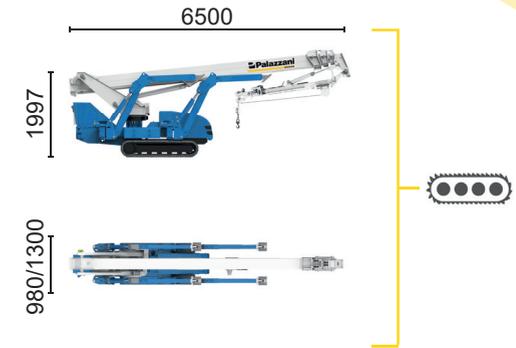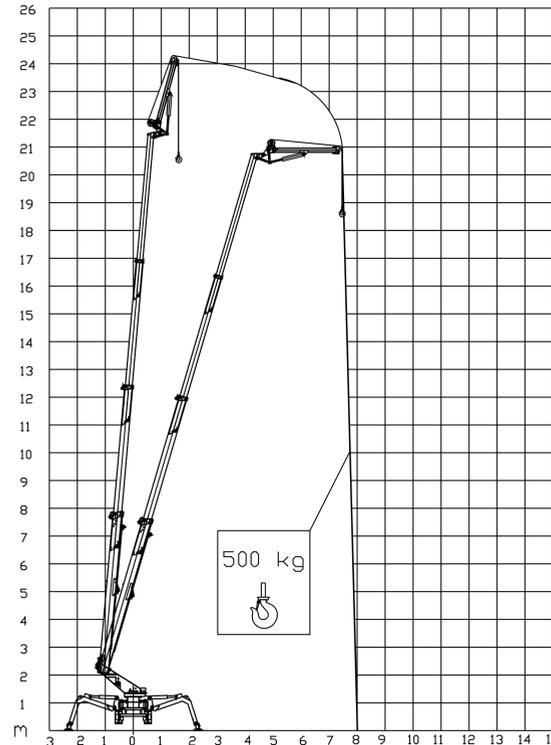

TSJ 25/C  23,5 m 8,5 m 500 kg 660° 180x70 cm 90°+80° 2,61-4,85 m 32% 36% 1,2 km/h 4335 kg 26 kN 1,8 kN/m² 3,71 kN/m²

Available power options:

BI-ENERGY (DIESEL+AC)

ECO (AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 907 A 24