
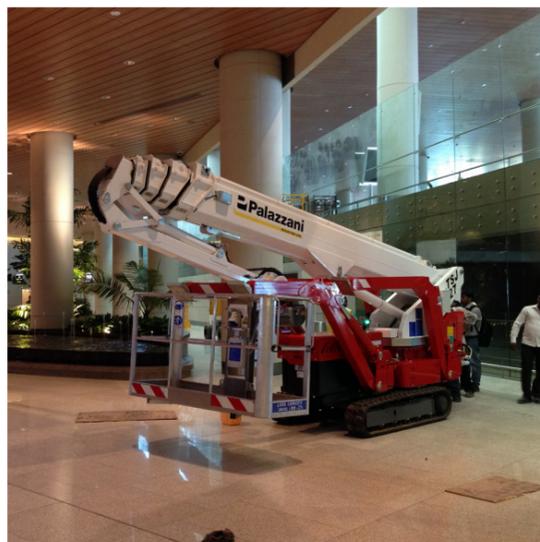


With Us, You can

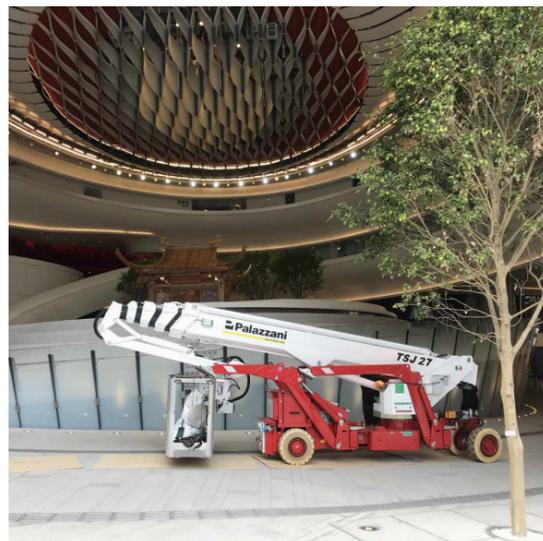

HIGH GREEN SAFE

 27 m

 12,8 m

 330 kg*
*optional

 Bi-energy
Eco
Hybrid

 Crawlers
Wheels



SPIDER LIFT

AVAILABLE OPTIONS

STANDARD EQUIPMENT

- Hydraulic steering and transmission with 4 speeds
- Rubber tracks with hydraulically variable external width
- Independent outriggers rotating on 2 different positions
- Automatic set-up with self-levelling
- Turntable rotation at 660°
- CANBUS electronics
- Steel made telescopic boom + fixed jib
- Hydraulic and electric lines inside the boom
- Air \ water supplementary line along the boom with internal hose
- Removable aluminium alloy aerial cage 180x70x110 cm
- Cage with hydraulic rotation 90° + 80°
- "Area manager" limiting device for safe working load 120 and 230 kg
- Load sensor on the cage
- Cable control at the ground + electric control at the cage
- 230 VAC electric plug on the cage
- PalSystem with touchscreen monitor for diagnostics and monitoring of operating parameters
- CE Mark homologation certificates, manuals, stickers and spares book in English language



3rd WORKING AREA WITH 3 MEN



HYDRAULIC WINCH 500 KG WITH 30 m ROPE AND SUPPORT



INSTALLATION KIT FOR HYDRAULIC WINCH 500 KG "RETURN TO HOME" FUNCTION INCLUDED



QUICK PIPES COUPLING KIT FOR HYDRAULIC WINCH 500 KG



COMPACT BASKET SUPPORT 4 CASTORS UNDER THE CAGE INCLUDED



TREE CUTTERS COVER PACKAGE



BASKET ANTI-COLLISION KIT WITH ULTRASONIC SENSORS AND LASERS



NON-MARKING TRACKS



CONTROL FOOT PEDAL ON THE CAGE



4 CASTORS UNDER THE CAGE



CAGE FOR ONE MAN 70x70x110 CM



PADS FOR OUTRIGGERS



"RETURN TO HOME" FUNCTION



LIFTING ACCESSORIES KIT FOR THE BASKET - LIFTING JIB, FRONT SUPPORTS, UPPER SUPPORTS, ELECTRONIC ANEMOMETER



GROUNDING CABLE INSIDE THE BOOM



CUSTOMIZED COLOURS



LED LIGHT




RADIO CONTROL



INTER-PHONIC COMMUNICATION SYSTEM



ELECTRONIC ANEMOMETER



LIFTING HOOK IN PLACE OF THE BASKET



DISPLAY IN THE BASKET



DRINK HOLDER IN THE BASKET



HANDS HEATER IN THE BASKET



DIAGNOSTIC CABLE KIT



EMERGENCY ELECTROPUMP KIT



PADS HOLDER



3 kW - 230 VAC ELECTRIC GENERATOR



36 MONTHS OF WARRANTY ON THE BATTERY







BI-ENERGY





Diesel
14,7 kW

Single-phase
Electric motor
230 VAC - 2,2 kW

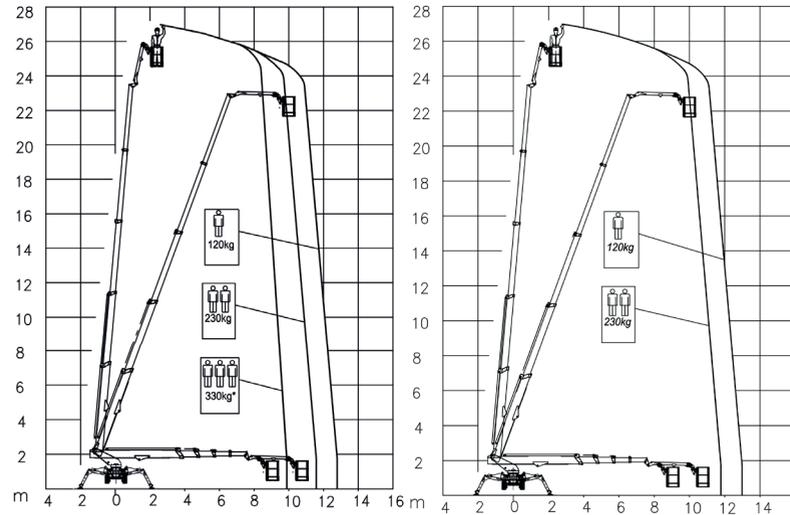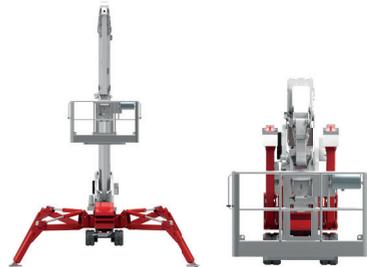

*optional

9,9 m	11,6 m	12,8 m	7,3 m	11,6 m	12,8 m	7,3 m			
330 kg*	230 kg	120 kg	120/230 kg	230 kg	120 kg	230/120 kg			
L1	L2	W1	W2	W3	L1	L2	W1	W2	W3
4927 mm	6436 mm	4791 mm	3828 mm	2865 mm	4927 mm	6436 mm	4791 mm	3828 mm	2865 mm

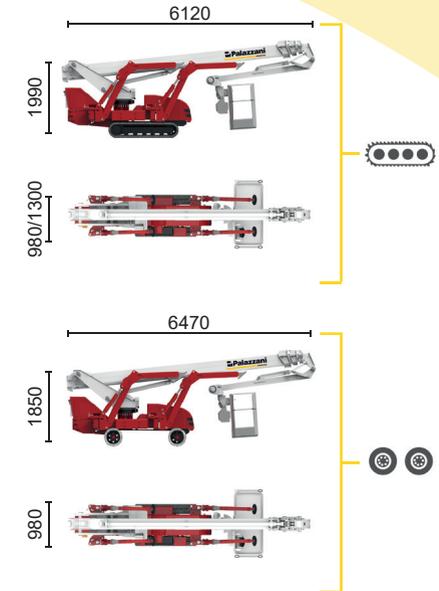

TSJ 27/C	TSJ 27/R	27 m	12,8 m	330 kg*	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	42%	1,2 km/h	4455 kg	29 kN	1,88 kN/m ²	4,04 kN/m ²

Available power options:

ECO (AC+BATTERY)

HYBRID² (DIESEL+AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it





NC 908 A 24



BI-ENERGY

 Diesel
14,7 kW

 Single-phase
Electric motor
230 VAC - 2,2 kW

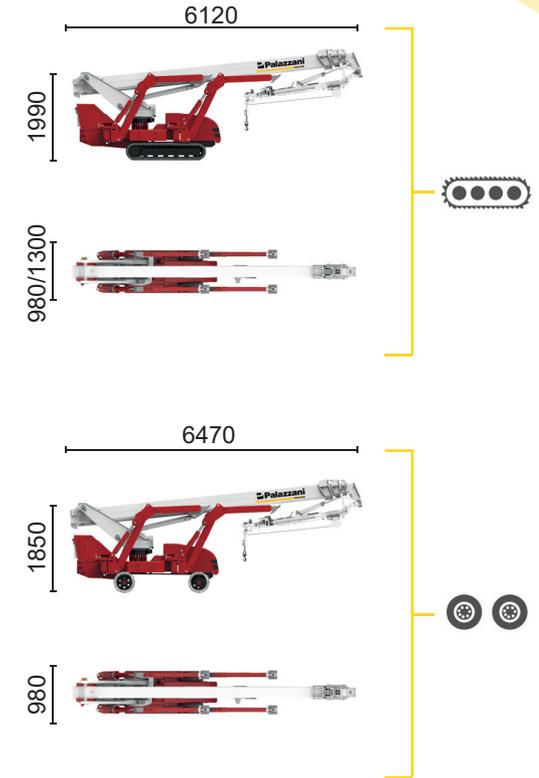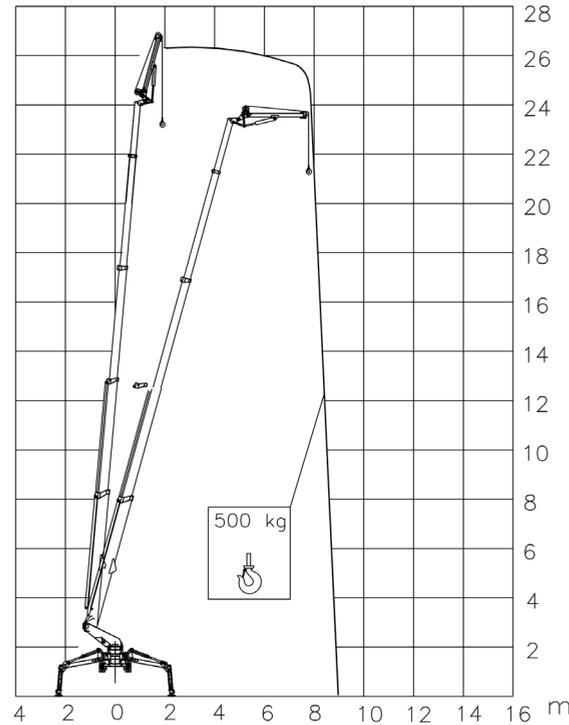

TSJ 27/C		25,5 m	9 m	500 kg	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	42%	1,2 km/h	4455 kg	29 kN	1,88 kN/m ²	4,04 kN/m ²
-----------------	---	--------	-----	--------	------	-----------	---------	-------------	-----	-----	----------	---------	-------	------------------------	------------------------

TSJ 27/R		25,5 m	9 m	500 kg	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	29%	1,7 km/h	4700 kg	29 kN	1,99 kN/m ²	4,04 kN/m ²
-----------------	---	--------	-----	--------	------	-----------	---------	-------------	-----	-----	----------	---------	-------	------------------------	------------------------

Available power options:

ECO (AC+BATTERY)

HYBRID² (DIESEL+AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it




NC 909 A 24



ECO





Inverter actuated
Electric motor
5,5 kW

Lithium iron
phosphate battery
LiFePO4 - 16,1 kWh
(48 V - 315 Ah)

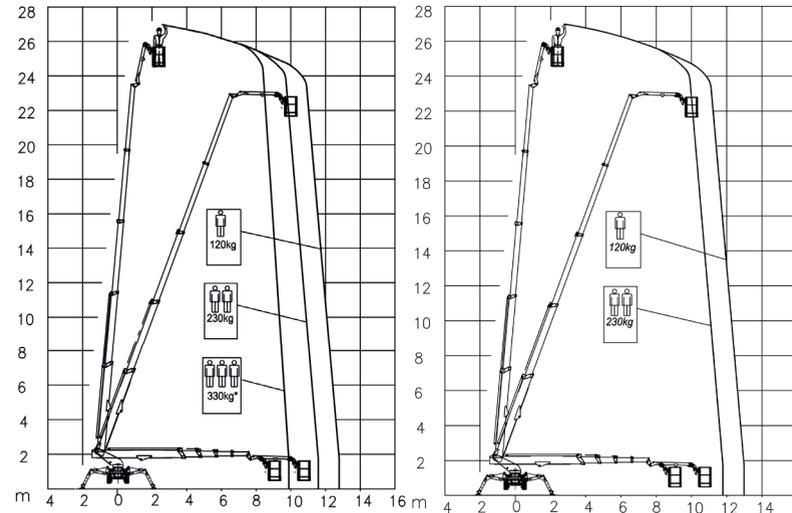

*optional

9,9 m	11,6 m	12,8 m	7,3 m	11,6 m	12,8 m	7,3 m
330 kg*	230 kg	120 kg	120/230 kg	230 kg	120 kg	230/120 kg
L1	L2	W1	W2	W3	L1	L2
4927 mm	6436 mm	4791 mm	3828 mm	2865 mm	4927 mm	6436 mm

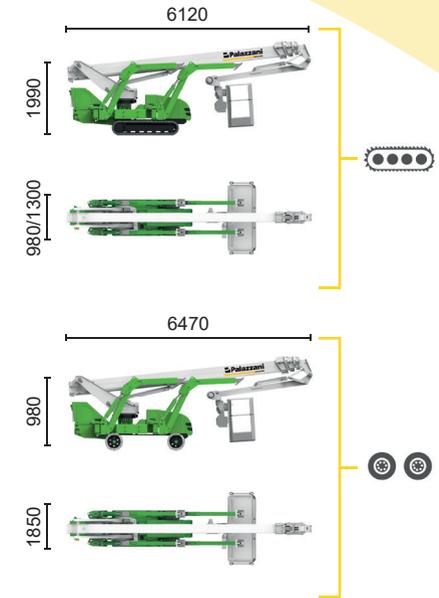

TSJ 27/C		27 m	12,8 m	330 kg*	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	42%	1,2 km/h	4620 kg	29 kN	1,95 kN/m ²	3,97 kN/m ²
TSJ 27/R		27 m	12,8 m	330 kg*	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	29%	1,2 km/h	4700 kg	29 kN	1,99 kN/m ²	4,04 kN/m ²

Available power options:

- BI-ENERGY** (DIESEL+AC)
- HYBRID²** (DIESEL+AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it





NC 910 A 24



ECO

 Inverter actuated
Electric motor
5,5 kW

 Lithium iron
phosphate battery
LiFePO4 - 16,1 kWh
(48 V - 315 Ah)

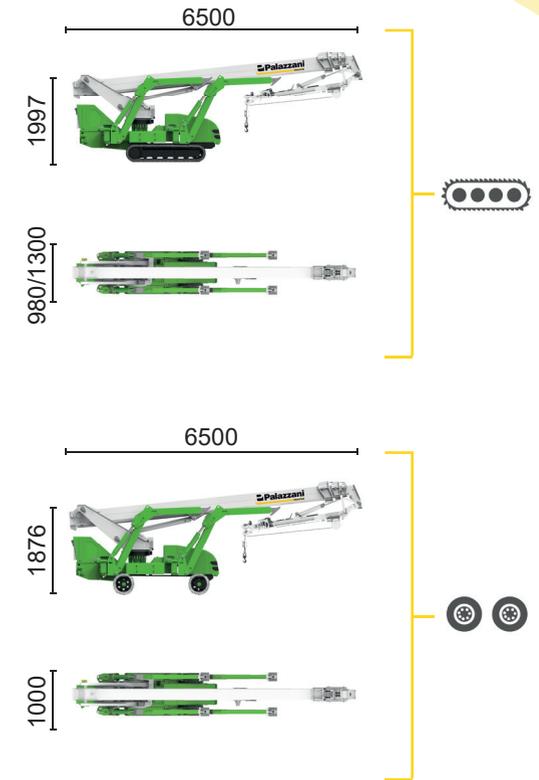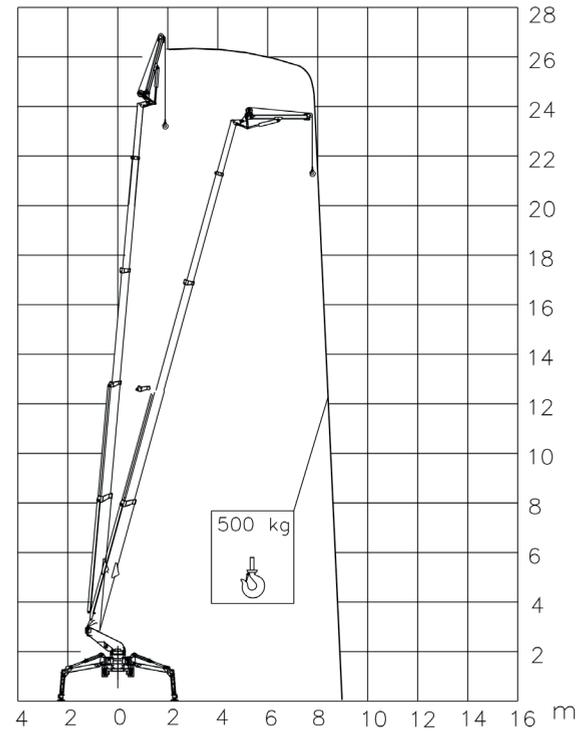

TSJ 27/C		25,5 m	9 m	500 kg	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	42%	1,2 km/h	4455 kg	29 kN	1,89 kN/m ²	4,04 kN/m ²
-----------------	---	--------	-----	--------	------	-----------	---------	-------------	-----	-----	----------	---------	-------	------------------------	------------------------

TSJ 27/R		25,5 m	9 m	500 kg	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	29%	1,2 km/h	4700 kg	29 kN	1,99 kN/m ²	4,04 kN/m ²
-----------------	---	--------	-----	--------	------	-----------	---------	-------------	-----	-----	----------	---------	-------	------------------------	------------------------

Available power options:

-  **BI-ENERGY** (DIESEL+AC)
-  **HYBRID²** (DIESEL+AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 911 A 24





HYBRID²

 Diesel
10,6 kW




 Inverter actuated
Electric motor
5,5 kW

 Lithium iron
phosphate battery
LiFePO4 - 10,7 kWh
(48 V - 210 Ah)

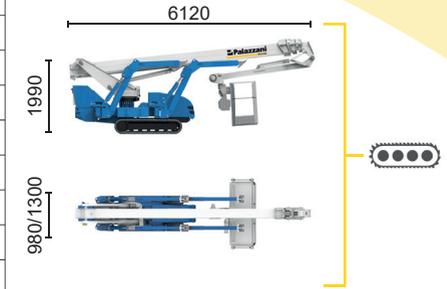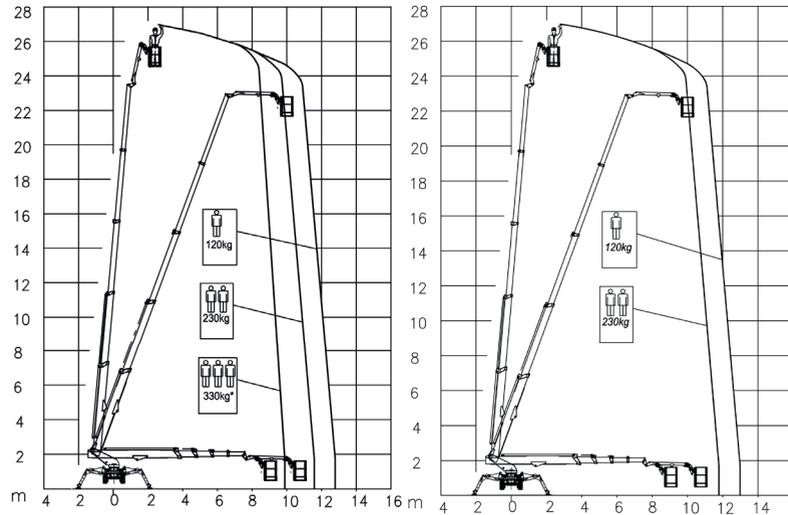

*optional

9,9 m	11,6 m	12,8 m	7,3 m	11,6 m	12,8 m	7,3 m			
330 kg*	230 kg	120 kg	120/230 kg	230 kg	120 kg	230/120 kg			
L1	L2	W1	W2	W3	L1	L2	W1	W2	W3
4927 mm	6436 mm	4791 mm	3828 mm	2865 mm	4927 mm	6436 mm	4791 mm	3828 mm	2865 mm



TSJ 27/C  27 m 12,8 m 330 kg* 660° 180x70 cm 90°+80° 2,86-4,79 m 44% 42% 1,2 km/h 4950 kg 29 kN 2,09 kN/m2 4,49 kN/m2

Available power options:

 **BI-ENERGY** (DIESEL+AC)

 **ECO** (AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 912 A 24





HYBRID²

 Diesel
10,6 kW

 Inverter actuated
Electric motor
5,5 kW

 Lithium iron
phosphate battery
LiFePO4 - 10,7 kWh
(48 V - 210 Ah)

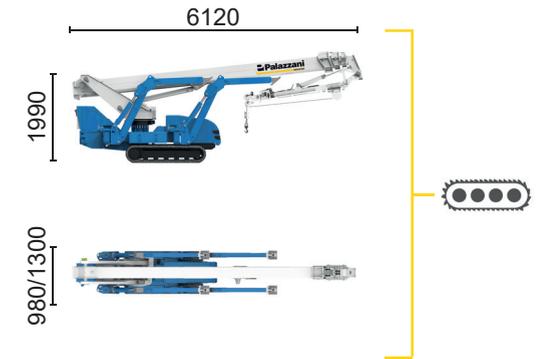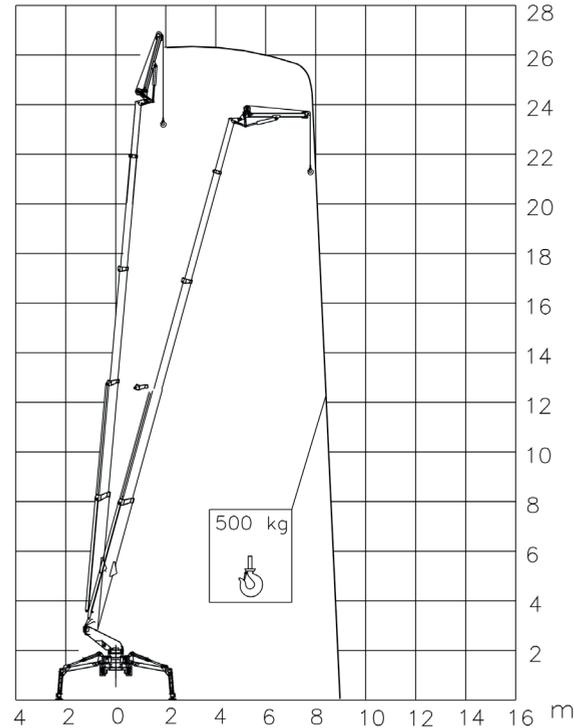

															
TSJ 27/C		25,5 m	9 m	500 kg	660°	180x70 cm	90°+80°	2,86-4,79 m	44%	42%	1,2 km/h	4950 kg	29 kN	2,09 kN/m ²	4,49 kN/m ²

Available power options:
BI-ENERGY (DIESEL+AC)
ECO (AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.
 Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.
 Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy
 Tel. (+39) 0306857073
 info@palazzani.it
 www.palazzani.it



NC 913 A 24