

With **Us**, You can



**HIGH**  
**GREEN**  
**SAFE**



21,2 m



9,5 m



200 kg



Bi-energy  
Eco



Crawlers  
Wheels



**STANDARD EQUIPMENT**

- CANBUS electronics
- Hydraulic steering and transmission on rubber tracks with 2 speeds
- Hydraulic set-up with 4 independent outriggers, of the fixed type
- 2 aluminium made articulated double telescopic booms
- Safe working load 200 kg
- Aluminium cage 140x70x110 cm
- Cage with automatic self-levelling
- Cage with hydraulic rotation 90° + 90°
- Cage equipped with support of fast disassembling for narrow passages
- Boom slewing under any condition of load and set-up at 360°
- Electric and proportional controls and dual panel: cage panel and ground panel
- 230VAC electric plug on the cage
- CE Mark homologation certificates, manuals, stickers and spares book in English language



- |   |   |   |   |
|---|---|---|---|
|    | <b>AUTOMATIC SET-UP AND SELF-LEVELLING OF THE OUTRIGGERS</b>        |    | <b>CUSTOMIZED COLOURS</b>                   |
|    | <b>BASKET ANTI-COLLISION KIT WITH ULTRASONIC SENSORS AND LASERS</b> |    | <b>LED LIGHT</b>                            |
|    | <b>NON-MARKING TRACKS</b>   |    | <b>RADIO CONTROL</b>                        |
|    | <b>CONTROL FOOT PEDAL ON THE CAGE</b>                               |    | <b>INTER-PHONIC COMMUNICATION SYSTEM</b>    |
|   | <b>PADS FOR OUTRIGGERS</b>  |   | <b>ELECTRONIC ANEMOMETER</b>                |
|  | <b>“RETURN TO HOME” FUNCTION</b>                                    |  | <b>DRINK HOLDER IN THE BASKET</b>           |
|  | <b>DIAGNOSTIC CABLE KIT</b>   |  | <b>HANDS HEATER IN THE BASKET</b>           |
|  | <b>LOAD CELL</b>  |  | <b>EMERGENCY ELECTROPUMP KIT</b>            |
|  | <b>GROUNDING CABLE INSIDE THE BOOM</b>                              |  | <b>36 MONTHS OF WARRANTY ON THE BATTERY</b> |
|  | <b>FLASHING LIGHTS ON THE STABILIZERS</b>                           |  | <b>BASKET STAIRS</b>                        |







**BI-ENERGY**

 Diesel  
10,6 kW

 Single-phase  
Electric motor  
230 VAC - 2,5 kW

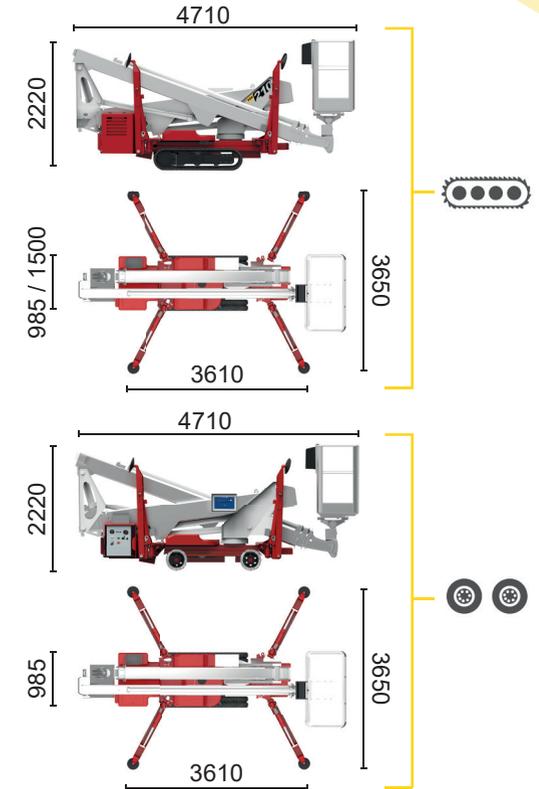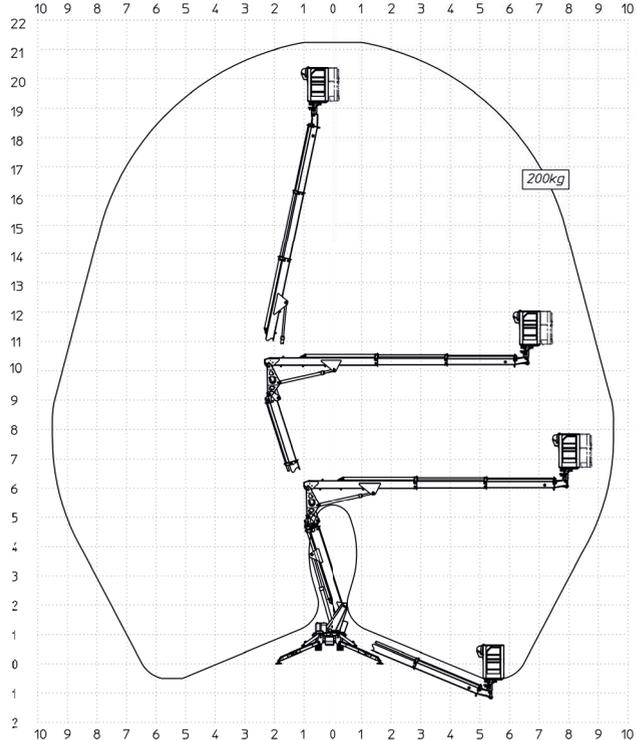

<b>TZX 210/C</b>		21,2 m	9,5 m	200 kg	360°	140x70 cm	90°+90°	3,65 m	21%	23%	2 km/h	2500 kg	19 kN	1,9 kN/m <sup>2</sup>	3,79 kN/m <sup>2</sup>
<b>TZX 210/R</b>		21,2 m	9,5 m	200 kg	360°	140x70 cm	90°+90°	3,65 m	21%	23%	2 km/h	2500 kg	19 kN	1,9 kN/m <sup>2</sup>	3,79 kN/m <sup>2</sup>

Available power options:  
**ECO** (AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.  
Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.  
Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy  
Tel. (+39) 0306857073  
info@palazzani.it  
www.palazzani.it



NC 1028 A 25





**ECO**

---

 Inverter actuated Electric motor

---

 Lithium iron phosphate battery LiFePO4

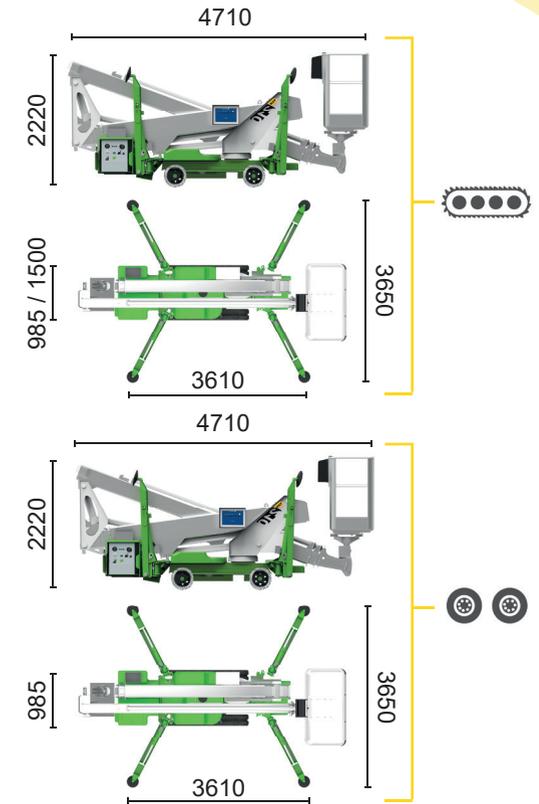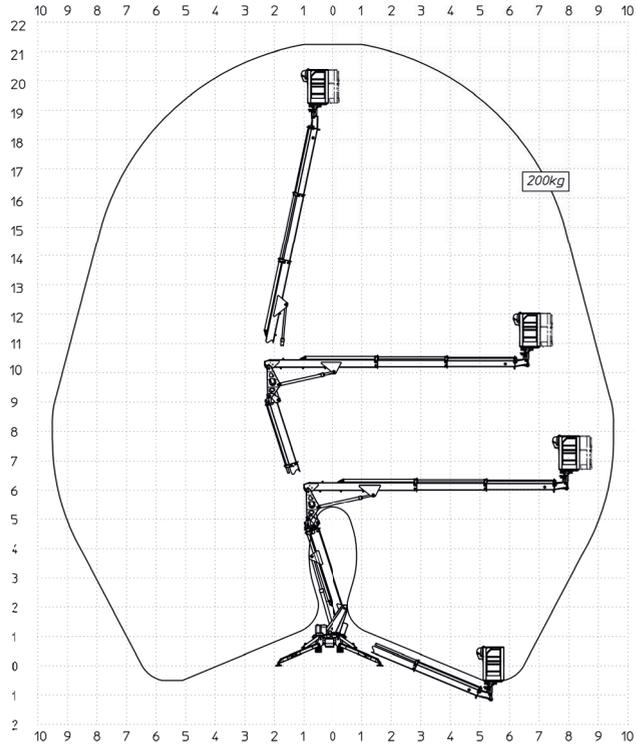

<b>TZX 210/C</b>		21,2 m	9,5 m	200 kg	360°	140x70 cm	90°+90°	3,65 m	21%	23%	2 km/h	2500 kg	19 kN	1,9 kN/m <sup>2</sup>	3,79 kN/m <sup>2</sup>
<b>TZX 210/R</b>		21,2 m	9,5 m	200 kg	360°	140x70 cm	90°+90°	3,65 m	21%	23%	2 km/h	2500 kg	19 kN	1,9 kN/m <sup>2</sup>	3,79 kN/m <sup>2</sup>

Available power options:

**BI-ENERGY** (DIESEL+AC)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 1029 A 25