

With Us, You can



HIGH  
GREEN  
SAFE



25 m



10,6 m



250 kg



Bi-energy  
Eco



Crawlers  
Wheels



**STANDARD EQUIPMENT**

- CANBUS electronics
- Hydraulic transmission on non-marking rubber tracks with 2 speeds
- Hydraulic set-up with 4 independent outriggers, of the rotating type
- 2 aluminium made articulated double telescopic booms
- Safe working load 120/250 kg
- Aluminium cage 140x70x110 cm
- Cage with automatic self-levelling
- Cage with hydraulic rotation 90° + 90°
- Cage equipped with support of fast disassembling for narrow passages
- Boom slewing under any condition of load and set-up at 360°
- Area limiting system according to load and set-up (supplementary moment sensing system)
- Electric and proportional controls and dual panel: cage panel and ground panel
- 230VAC electric plug on the cage
- CE Mark homologation certificates, manuals, stickers and spares book in English language



HYDRAULIC WIRE-WINCH OF 250 KG



CUSTOMIZED COLOURS



AIR/WATER SUPPLEMENTARY LINE ALONG THE BOOM WITH INTERNAL HOSE



LED LIGHT



PROTECTION OF OUTRIGGERS' CYLINDERS



RADIO CONTROL



AUTOMATIC SET-UP AND SELF-LEVELLING OF THE OUTRIGGERS



INTER-PHONIC COMMUNICATION SYSTEM



BASKET ANTI-COLLISION KIT WITH ULTRASONIC SENSORS AND LASERS



ELECTRONIC ANEMOMETER



CONTROL FOOT PEDAL ON THE CAGE



DRINK HOLDER IN THE BASKET



PADS FOR OUTRIGGERS



HANDS HEATER IN THE BASKET



"RETURN TO HOME" FUNCTION




EMERGENCY ELECTROPUMP KIT



DIAGNOSTIC CABLE KIT



36 MONTHS OF WARRANTY ON THE BATTERY



LOAD CELL



GROUNDING CABLE INSIDE THE BOOM



FLASHING LIGHTS ON THE STABILIZERS



BASKET STAIRS








**BI-ENERGY**

 Diesel  
10,6 kW

 Single-phase  
Electric motor  
230 VAC - 2,5 kW

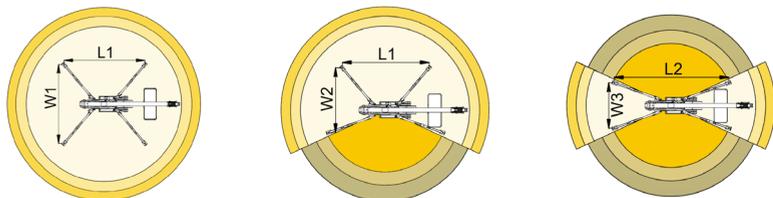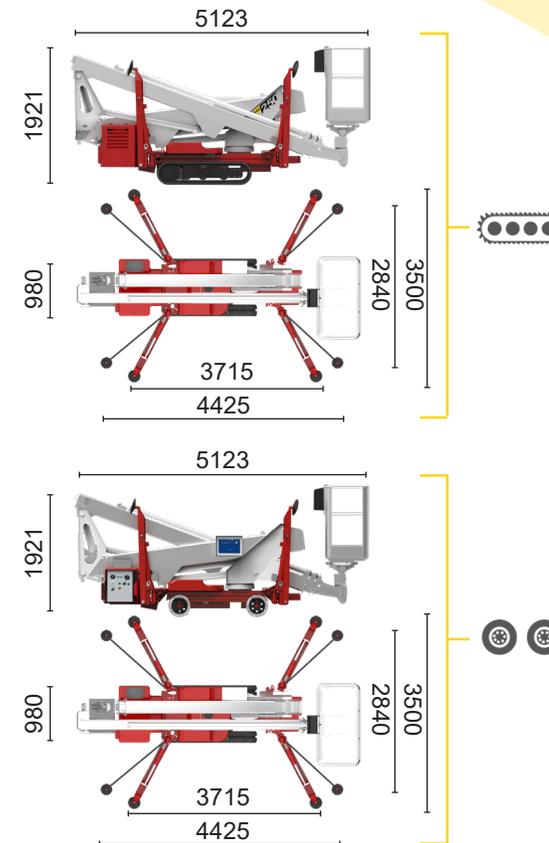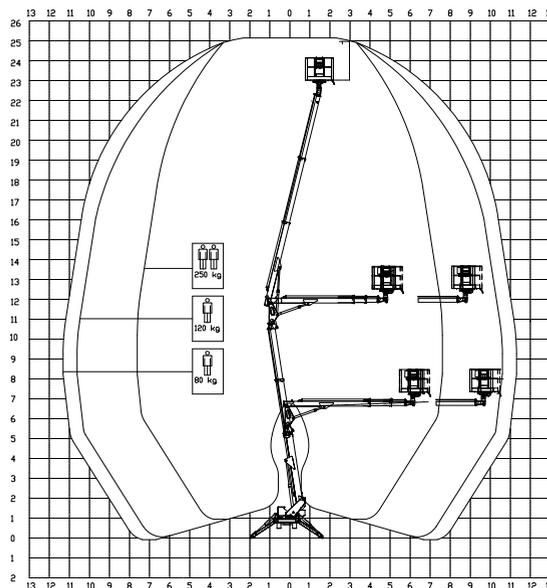

7,6 m	10,6 m	11,3 m	6 m	8,2 m	8,8 m	L1	L2	W1	W2	W3
250 kg	120 kg	80 kg	250 kg	120 kg	80 kg	3715 mm	4425 mm	3500 mm	3176 mm	2840 mm

																
<b>TZX 250/C</b>		25 m	10,6 m	250 kg	360°	140x70 cm	90°+90°	2,84-3,5 m	19%	23%	2,4 km/h	2660 kg	19,5 kN	2,04 kN/m <sup>2</sup>	3,71 kN/m <sup>2</sup>	
<b>TZX 250/R</b>		25 m	10,6 m	250 kg	360°	140x70 cm	90°+90°	2,84-3,5 m	19%	21%	1,5 km/h	2660 kg	19,5 kN	2,04 kN/m <sup>2</sup>	3,71 kN/m <sup>2</sup>	

Available power options:  
**ECO** (AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.  
 Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.  
 Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy  
 Tel. (+39) 0306857073  
 info@palazzani.it  
 www.palazzani.it





NC 962 A 24



**BI-ENERGY**

 Diesel  
10,6 kW

 Single-phase  
Electric motor  
230 VAC - 2,5 kW

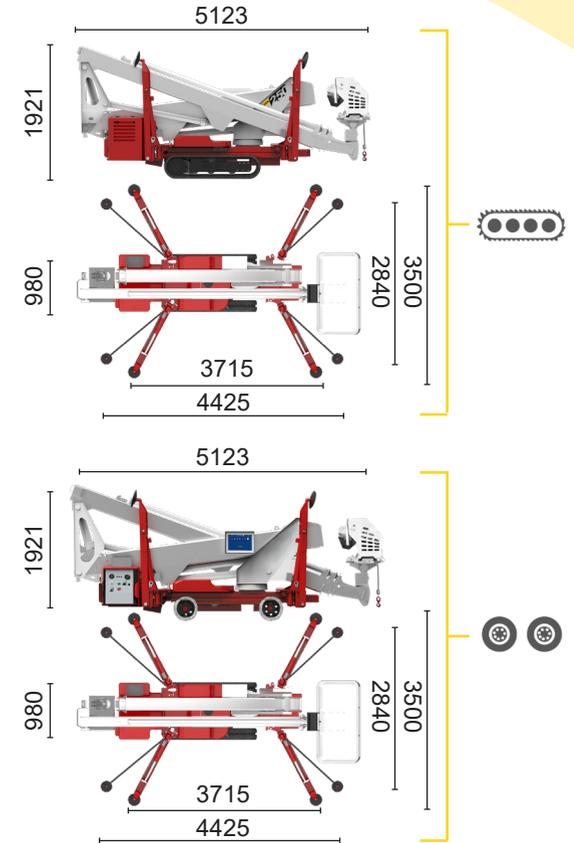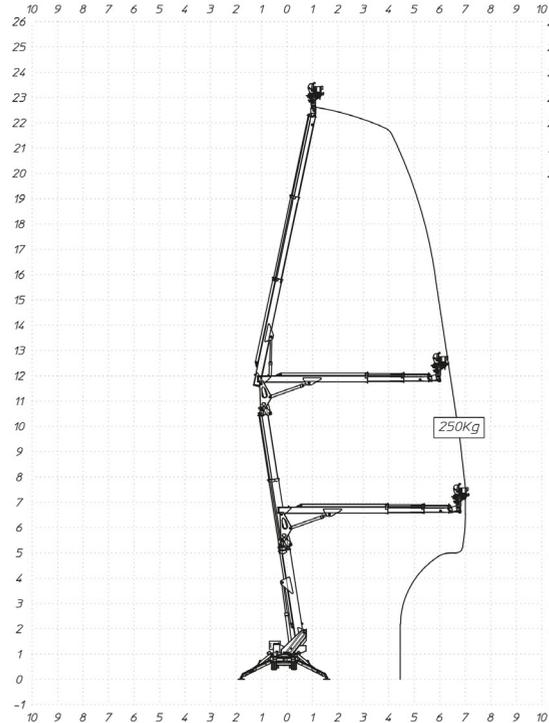

<b>TZX 250/C</b>		22,5 m	7 m	250 kg	360°	140x70 cm	90°+90°	2,84-3,5 m	19%	23%	2,4 km/h	2660 kg	19,5 kN	2,04 kN/m2	3,71 kN/m2
<b>TZX 250/R</b>		22,5 m	7 m	250 kg	360°	140x70 cm	90°+90°	2,84-3,5 m	19%	21%	1,5 km/h	2660 kg	19,5 kN	2,04 kN/m2	3,71 kN/m2

Available power options:  
**ECO** (AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.  
Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.  
Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy  
Tel. (+39) 0306857073  
info@palazzani.it  
www.palazzani.it






NC 963 A 24



**ECO**

Inverter actuated  
Electric motor  
5,5 kW

Lithium iron phosphate battery  
LiFePO4 - 10,8 kWh  
(24 V - 420 Ah)

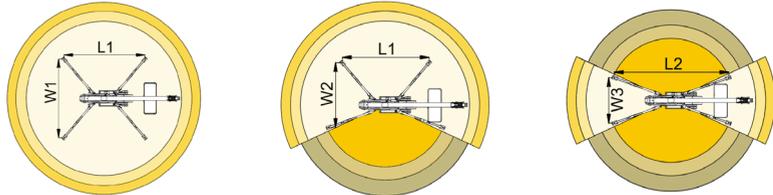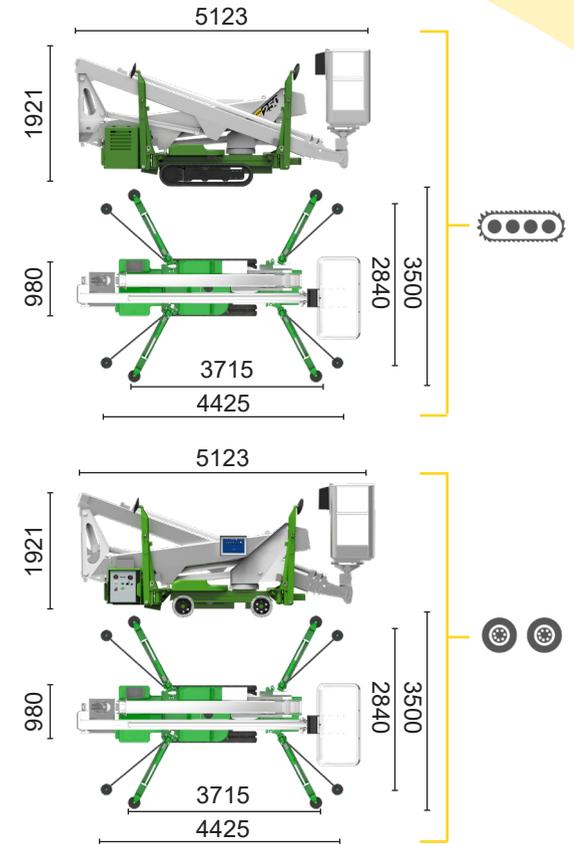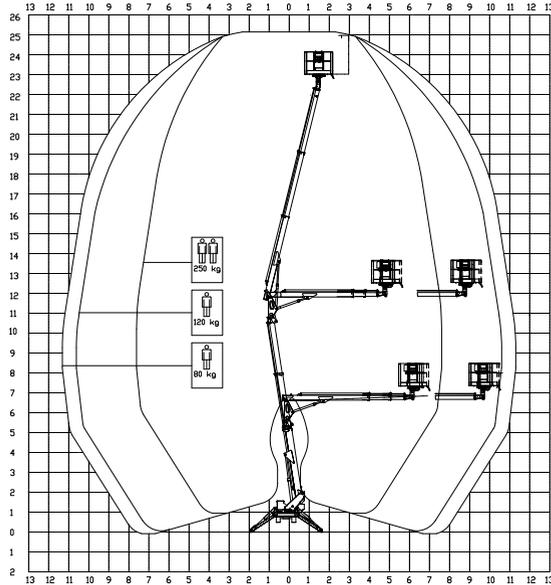

7,6 m	10,6 m	11,3 m	6 m	8,2 m	8,8 m	L1	L2	W1	W2	W3
250 kg	120 kg	80 kg	250 kg	120 kg	80 kg	3715 mm	4425 mm	3500 mm	3176 mm	2840 mm

<b>TZX 250/C</b>		25 m	10,6 m	250 kg	360°	140x70 cm	90°+90°	2,84-3,5 m	19%	23%	1,5 km/h	2660 kg	19,5 kN	2,04 kN/m <sup>2</sup>	3,71 kN/m <sup>2</sup>		
<b>TZX 250/R</b>		25 m	10,6 m	250 kg	360°	140x70 cm	90°+90°	2,84-3,5 m	19%	21%	1 km/h	2660 kg	19,5 kN	2,04 kN/m <sup>2</sup>	3,71 kN/m <sup>2</sup>		

Available power options:  
**BI-ENERGY** (DIESEL+AC)

The technical data may deviate +/- 3% from the specified values.  
 Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.  
 Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy  
 Tel. (+39) 0306857073  
 info@palazzani.it  
 www.palazzani.it





NC 964 A 24



**ECO**

Inverter actuated  
Electric motor  
5,5 kW

Lithium iron  
phosphate battery  
LiFePO4 - 10,8 kWh  
(24 V - 420 Ah)

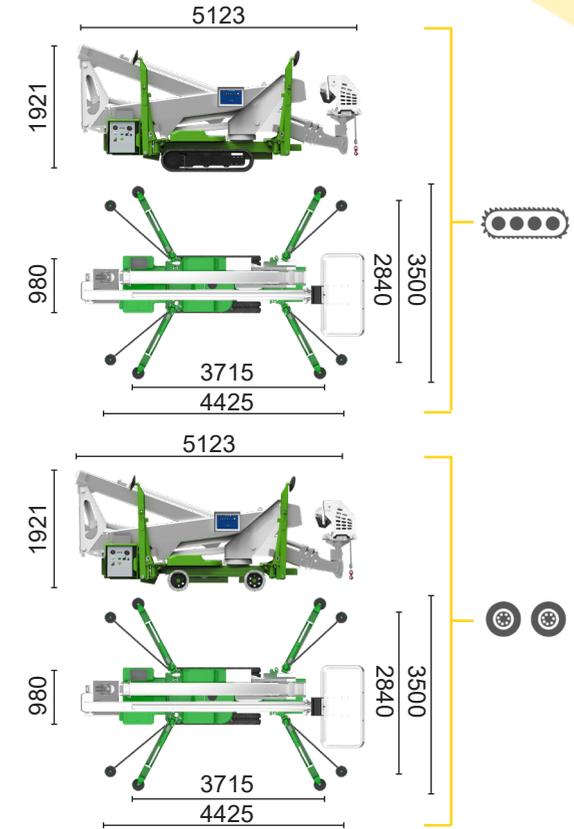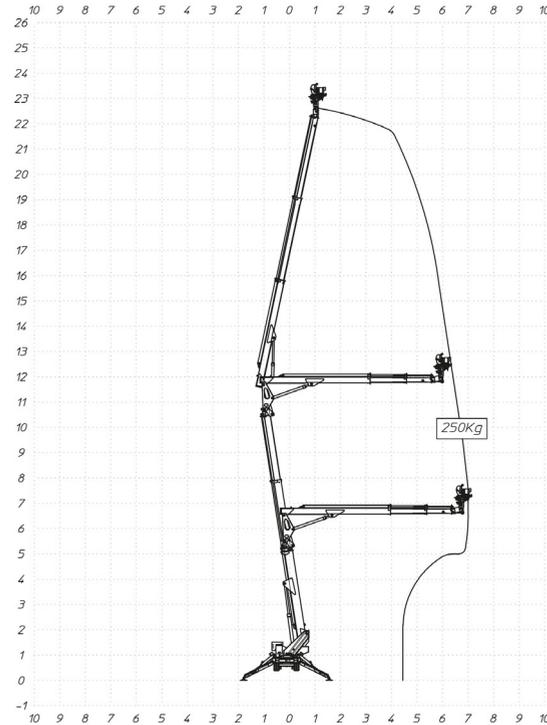

<b>TZX 250/C</b>		22,5 m	7 m	250 kg	360°	140x70 cm	90°+90°	2,84-3,5 m	19%	23%	1,5 km/h	2660 kg	19,5 kN	2,04 kN/m2	3,71 kN/m2
<b>TZX 250/R</b>		22,5 m	7 m	250 kg	360°	140x70 cm	90°+90°	2,84-3,5 m	19%	21%	1 km/h	2660 kg	19,5 kN	2,04 kN/m2	3,71 kN/m2

Available power options:

**BI-ENERGY** (DIESEL+AC)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 965 A 24