

With Us, You can

HIGH

GREEN

SAFE



24,4 m



10,7 m




230 kg



Bi-energy  
Eco



Crawlers  
Wheels

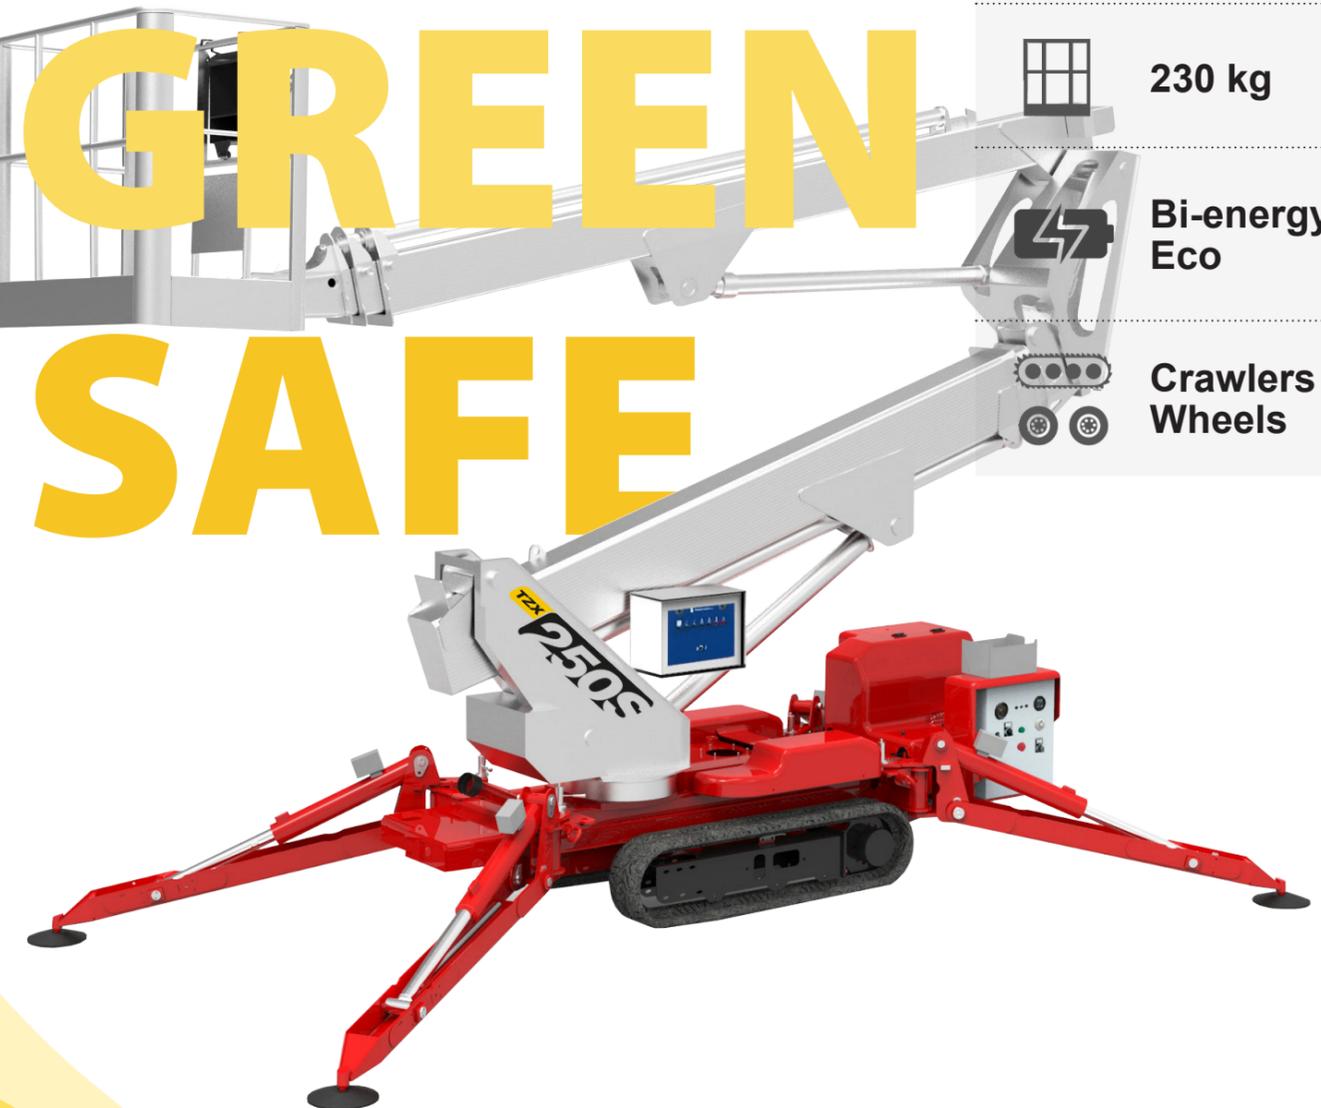


**STANDARD EQUIPMENT**

- CANBUS electronics
- Hydraulic transmission on non-marking rubber tracks with 2 speeds
- Hydraulic set-up with 4 independent outriggers, of the rotating type
- 2 aluminium made articulated double telescopic booms
- Safe working load 120/250 kg
- Aluminium cage 140x70x110cm
- Cage with automatic self-levelling
- Cage with hydraulic rotation 90° + 90°
- Cage equipped with support of fast disassembling for narrow passages
- Boom slewing under any condition of load and set-up at 360°
- Area limiting system according to load and set-up (supplementary moment sensing system)
- Electric and proportional controls and dual panel: cage panel and ground panel
- 230VAC electric plug on the cage
- CE Mark homologation certificates, manuals, stickers and spares book in English language

**BI-ENERGY**  
(Diesel + AC)



**ECO**  
(AC + Battery)

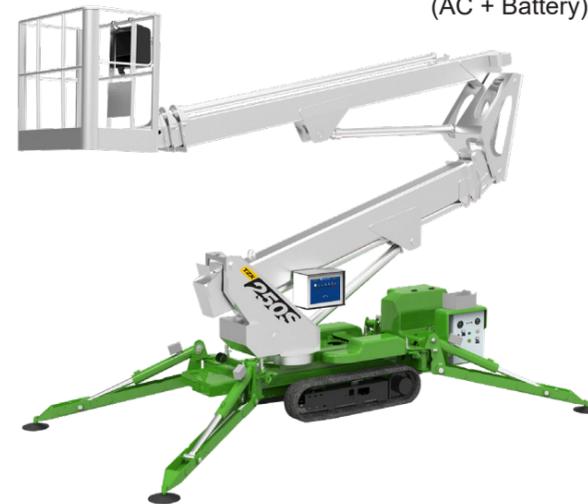

**AIR/WATER SUPPLEMENTARY LINE ALONG THE BOOM WITH INTERNAL HOSE**



**CUSTOMIZED COLOURS**



**PROTECTION OF OUTRIGGERS' CYLINDERS**



**LED LIGHT**




**BASKET ANTI-COLLISION KIT WITH ULTRASONIC SENSORS AND LASERS**



**RADIO CONTROL**



**CONTROL FOOT PEDAL ON THE CAGE**



**INTER-PHONIC COMMUNICATION SYSTEM**



**PADS FOR OUTRIGGERS**



**ELECTRONIC ANEMOMETER**



**"RETURN TO HOME" FUNCTION**



**DRINK HOLDER IN THE BASKET**



**DIAGNOSTIC CABLE KIT**



**HANDS HEATER IN THE BASKET**



**EMERGENCY ELECTROPUMP KIT**



**36 MONTHS OF WARRANTY ON THE BATTERY**



**GROUNDING CABLE INSIDE THE BOOM**



**BASKET STAIRS**



**FLASHING LIGHTS ON THE STABILIZERS**








**BI-ENERGY**

 Diesel  
10,6 kW

 Single-phase  
Electric motor  
230 VAC - 2,5 kW

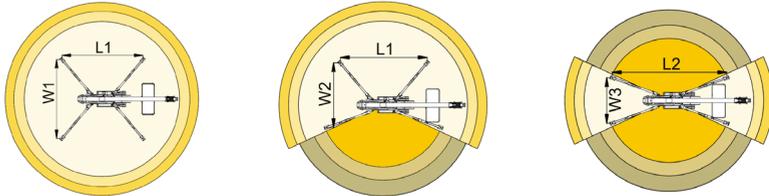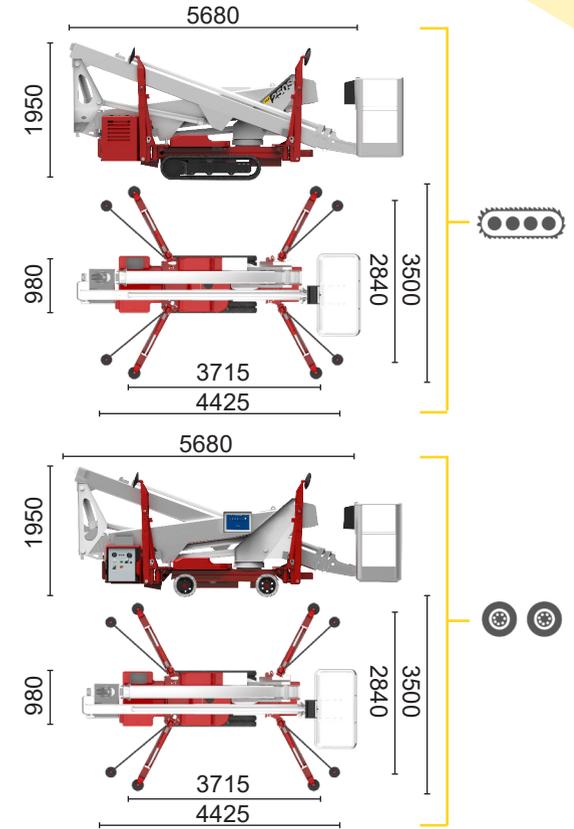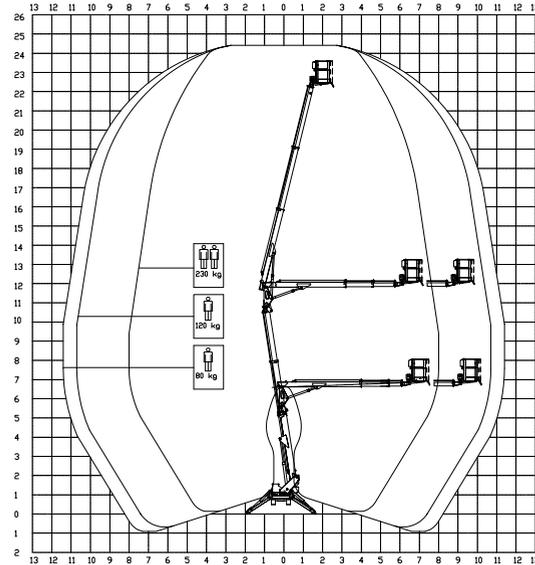

8 m	10,7 m	11,4 m	6,4 m	8,3 m	8,9 m	L1	L2	W1	W2	W3
230 kg	120 kg	80 kg	230 kg	120 kg	80 kg	3715 mm	4425 mm	3500 mm	3176 mm	2840 mm



		24,4 m	10,7 m	230 kg	360°	140x70 cm	90°+90°	2,84-3,5 m	19%	23%	2,4 km/h	2700 kg	19,5 kN	2,07 kN/m <sup>2</sup>	3,4 kN/m <sup>2</sup>
<b>TZX 250S/C</b>															
<b>TZX 250S/R</b>										21%	1,5 km/h				

Available power options:  
**ECO** (AC+BATTERY)

The technical data may deviate +/- 3 % from the specified values.  
Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.  
Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy  
Tel. (+39) 0306857073  
info@palazzani.it  
www.palazzani.it



NC 954 A 24






**ECO**

---


Inverter actuated  
Electric motor  
5,5 kW

---

Lithium iron phosphate battery  
LiFePO4 - 10,8 kWh  
(24 V - 420 Ah)

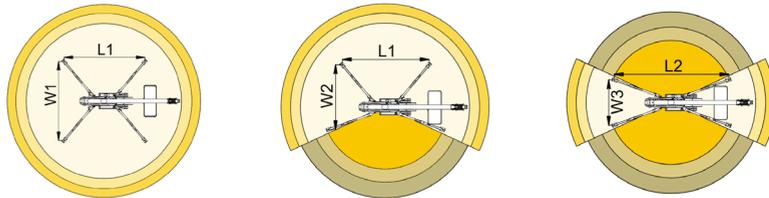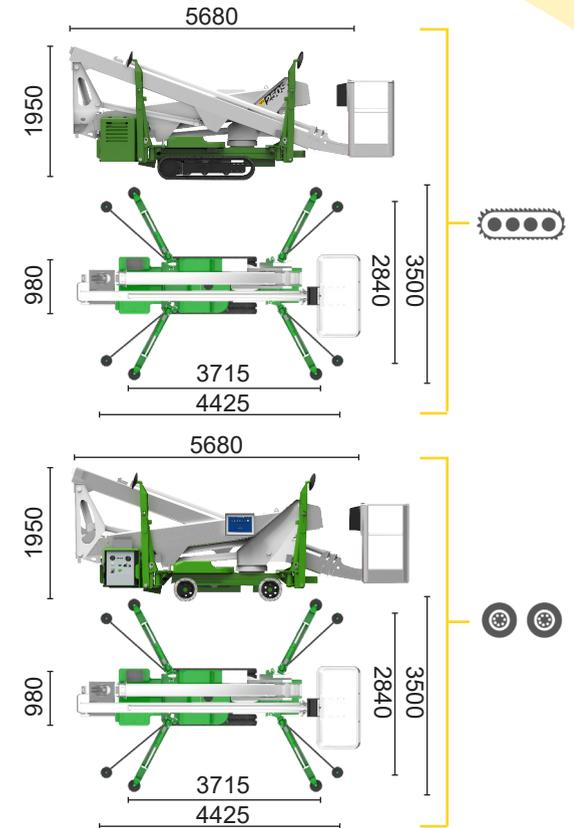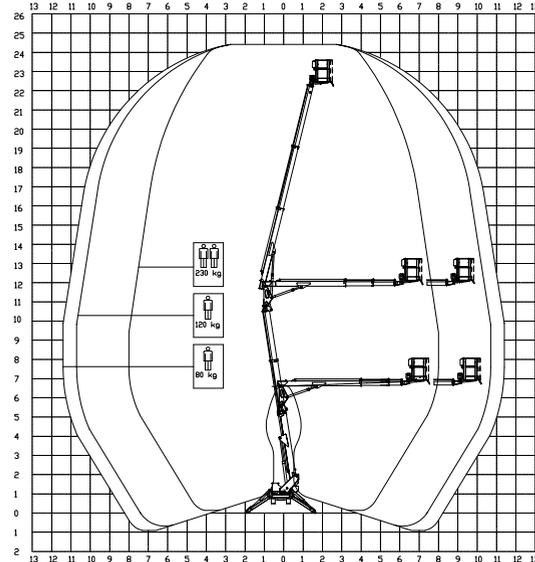

8 m	10,7 m	11,4 m	6,4 m	8,3 m	8,9 m	L1	L2	W1	W2	W3
230 kg	120 kg	80 kg	230 kg	120 kg	80 kg	3715 mm	4425 mm	3500 mm	3176 mm	2840 mm



Model	Icon	Length (m)	Width (m)	Weight (kg)	Rotation (°)	Platform Size (cm)	Platform Height (m)	Max Height (m)	Max Load (%)	Max Speed (km/h)	Max Capacity (kg)	Max Force (kN)	Max Pressure (kN/m²)	Max Wind (kN/m²)	
TZX 250S/C		24,4	10,7	230	360°	140x70	90°+90°	2,84-3,5	19%	23%	2,4	2700	19,5	2,07	3,4
TZX 250S/R		24,4	10,7	230	360°	140x70	90°+90°	2,84-3,5	19%	21%	1	2700	19,5	2,07	3,4

Available power options:

**BI-ENERGY**

The technical data may deviate +/- 3 % from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 955 A 24