

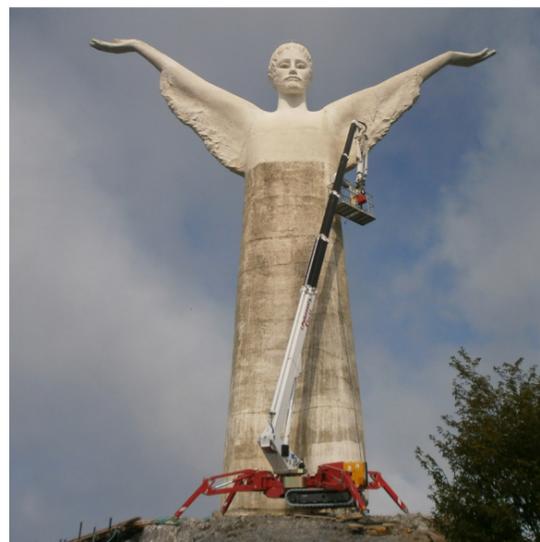


With **Us**, You can

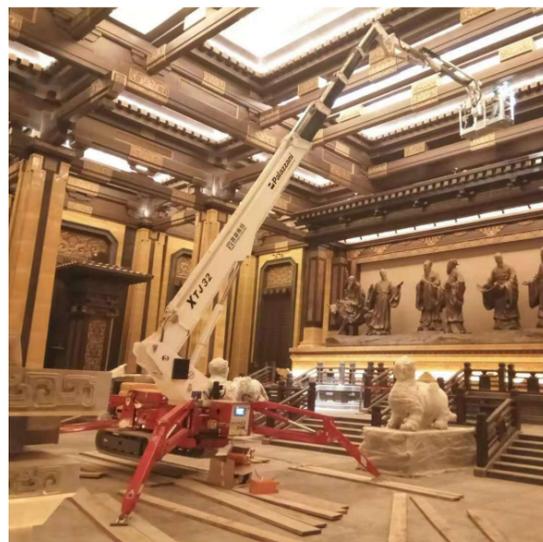

HIGH GREEN SAFE

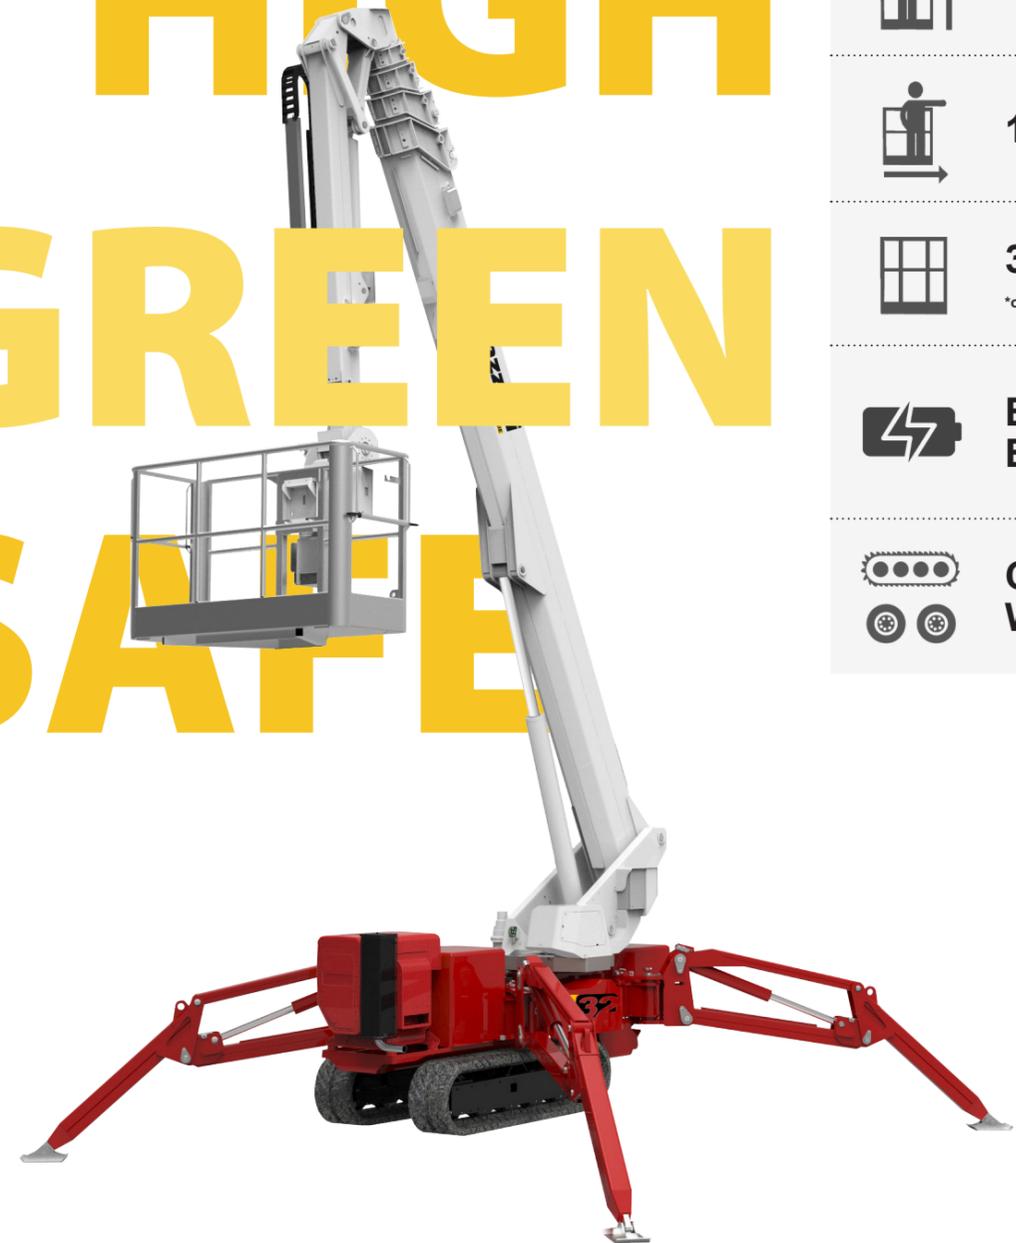

	32 m
	14,3 m
	330 kg* <small>*optional</small>
	Bi-energy Eco
	Crawlers Wheels

STANDARD EQUIPMENT

- Emergency electropump
- CANBUS electronics
- Hydraulic steering and transmission with 4 speeds
- Rubber tracks with hydraulically variable external width
- Independent Outriggers rotating on 2 different positions
- Automatic set-up with self-levelling
- Turntable rotation at 660°
- CANBUS electronics
- Steel made telescopic boom + articulated jib
- Hydraulic and electric lines inside the boom
- Air \ water supplementary line along the boom with internal hose
- Removable aluminium alloy aerial cage 180x70x110 cm
- Cage with hydraulic rotation 90° + 80°
- "Area manager" limiting device for safe working load 120 and 230 kg
- Load sensor on the cage
- Cable control at the ground + electric control at the cage
- 230VAC electric plug on the cage
- PalSystem with touchscreen monitor for diagnostics and monitoring of operating parameters
- CE Mark homologation certificates, manuals, stickers and spares book in English language



BI-ENERGY
(Diesel + AC)

ECO
(AC + Battery)

- | | | | |
|---|--|---|---|
|  | 3rd WORKING AREA WITH 3 MEN |  | CUSTOMIZED COLOURS |
|  | HYDRAULIC WINCH 500 KG WITH 32 m ROPE AND SUPPORT |  | LED LIGHT |
|  | INSTALLATION KIT FOR HYDRAULIC WINCH 500 KG "RETURN TO HOME" FUNCTION INCLUDED |  | INTER-PHONIC COMMUNICATION SYSTEM |
|  | QUICK PIPES COUPLING KIT FOR HYDRAULIC WINCH 500 KG |  | ELECTRONIC ANEMOMETER |
|  | COMPACT BASKET SUPPORT 4 CASTORS UNDER THE CAGE INCLUDED |  | LIFTING HOOK IN PLACE OF THE BASKET |
|  | TREE CUTTERS COVER PACKAGE |  | DISPLAY IN THE BASKET |
|  | BASKET ANTI-COLLISION KIT |  | DRINK HOLDER IN THE BASKET |
|  | NON-MARKING TRACKS |  | HANDS HEATER IN THE BASKET |
|  | CONTROL FOOT PEDAL ON THE CAGE |  | DIAGNOSTIC CABLE KIT |
|  | 4 CASTORS UNDER THE CAGE |  | PADS FOR OUTRIGGERS |
|  | CAGE FOR ONE MAN 70x70x110 CM |  | 3 kW - 230 VAC ELECTRIC GENERATOR |
|  | LIFTING ACCESSORIES KIT FOR THE BASKET - LIFTING JIB, FRONT SUPPORTS, UPPER SUPPORTS, ELECTRONIC ANEMOMETER |  | 36 MONTHS OF WARRANTY ON THE BATTERY |
|  | GROUNDING CABLE INSIDE THE BOOM | | |











BI-ENERGY

 Diesel
18,2 kW

 Inverter actuated
Single-phase
Electric motor
230 VAC - 3 kW

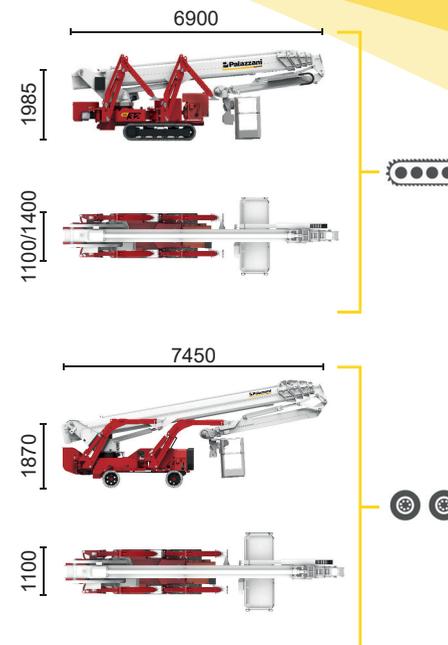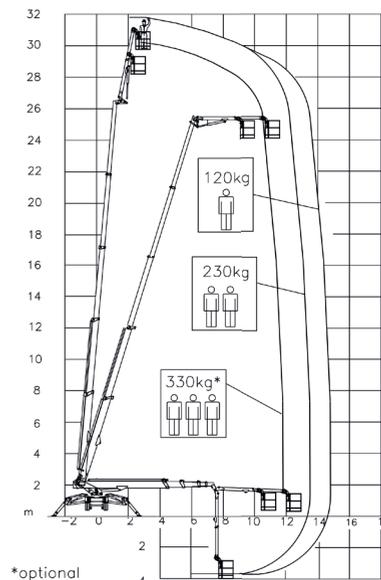

11,7 m	13,3 m	14,3 m	8,4 m	10 m	L1	L2	W1	W2	W3
330 kg*	230 kg	120 kg	330 kg*	120/230 kg	5125 mm	6460 mm	4760 mm	3785 mm	2820 mm



XTJ 32/C		32 m	14,3 m	330 kg*	660°	180x70 cm	90°+80°	2,82-4,76 m	16%	32%	3 km/h	5940 kg	35 kN	2,43 kN/m2	4,78 kN/m2
XTJ 32/R		32 m	14,3 m	330 kg*	660°	180x70 cm	90°+80°	2,82-4,76 m	16%	18%	2 km/h	5940 kg	35 kN	2,43 kN/m2	4,78 kN/m2

Available power options:
ECO (AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.
Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.
Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073
info@palazzani.it
www.palazzani.it




NC 935 A 24




BI-ENERGY

 Diesel
18,2 kW

 Inverter actuated
Single-phase
Electric motor
230 VAC - 3 kW

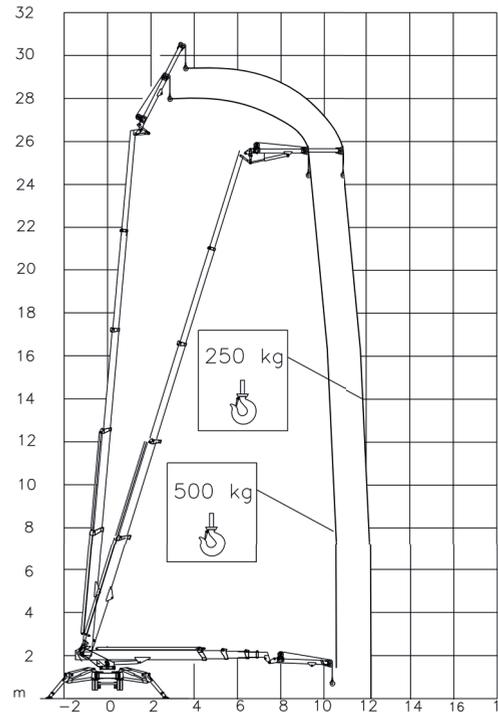

500 kg	250 kg
10 m	11,6 m

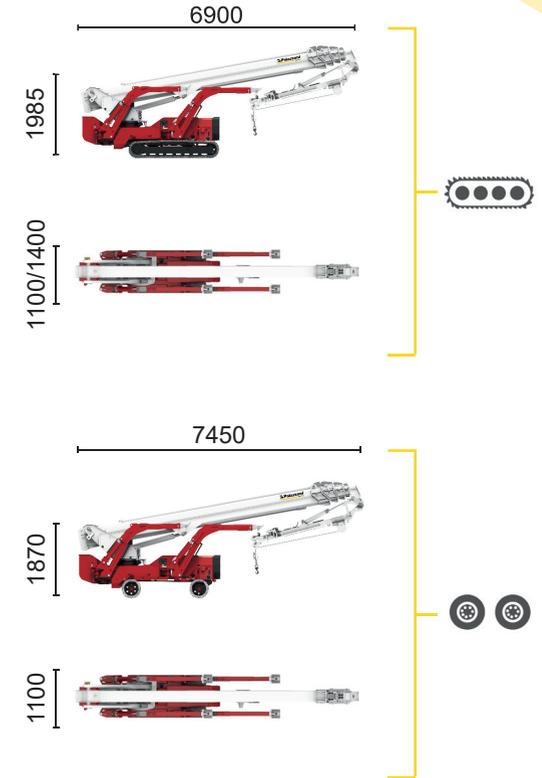

XTJ 32/C		31 m	11,6 m	500 kg	660°	180x70 cm	90°+80°	2,82-4,76 m	16%	32%	3 km/h	5940 kg	35 kN	2,43 kN/m ²	4,78 kN/m ²
-----------------	---	------	--------	--------	------	-----------	---------	-------------	-----	-----	--------	---------	-------	------------------------	------------------------

XTJ 32/R		31 m	11,6 m	500 kg	660°	180x70 cm	90°+80°	2,82-4,76 m	16%	18%	2 km/h	5940 kg	35 kN	2,43 kN/m ²	4,78 kN/m ²
-----------------	---	------	--------	--------	------	-----------	---------	-------------	-----	-----	--------	---------	-------	------------------------	------------------------

Available power options:
ECO (AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.
Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.
Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073
info@palazzani.it
www.palazzani.it



NC 936 A 24








ECO



Inverter actuated
Electric motor
16 kW



Lithium iron
phosphate battery
LiFePO4 - 21,5 kWh
(48 V - 420 Ah)

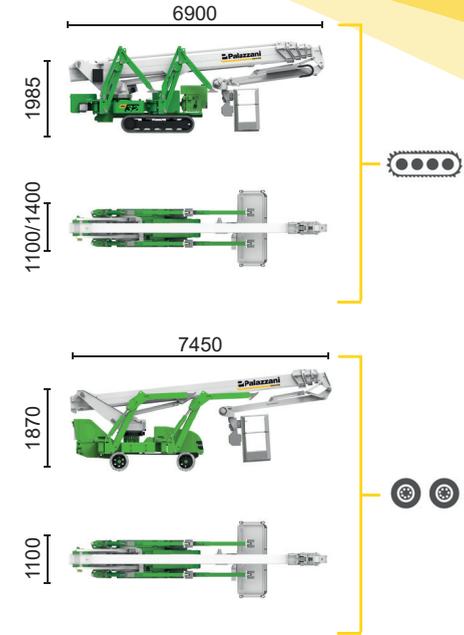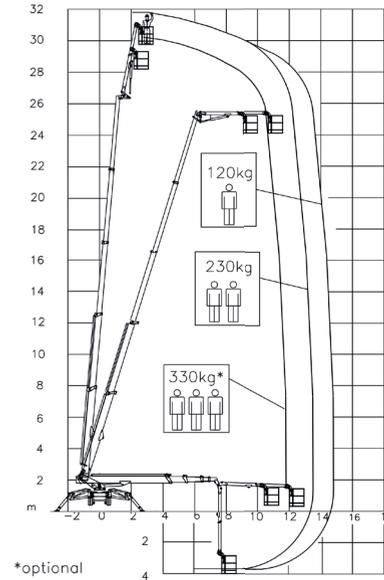

11,7 m	13,3 m	14,3 m	8,4 m	10 m	L1	L2	W1	W2	W3
330 kg*	230 kg	120 kg	330 kg*	120/230 kg	5125 mm	6460 mm	4760 mm	3785 mm	2820 mm



XTJ 32/C	XTJ 32/R	32 m	14,3 m	330 kg*	660°	180x70 cm	90°+80°	2,82-4,76 m	16%	32%	1,2 km/h	5940 kg	35 kN	2,43 kN/m ²	4,78 kN/m ²

Available power options:

BI-ENERGY (DIESEL+AC)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 937 A 24




ECO




Inverter actuated
Electric motor
16 kW



Lithium iron
phosphate battery
LiFePO4 - 21,5 kWh
(48 V - 420 Ah)

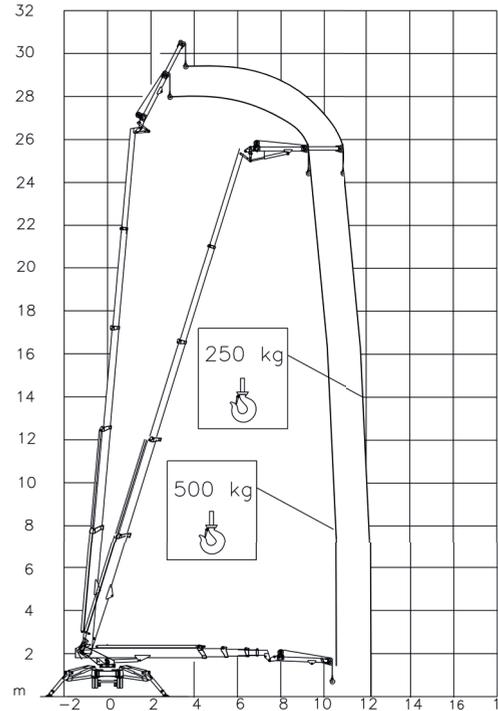

500 kg	250 kg
10 m	11,6 m

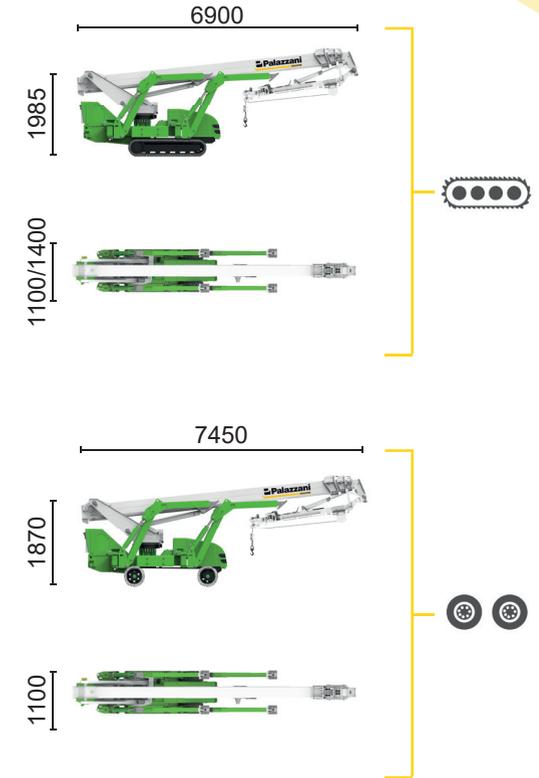

XTJ 32/C		31 m	11,6 m	500 kg	660°	180x70 cm	90°+80°	2,82-4,76 m	16%	32%	1,2 km/h	5940 kg	35 kN	2,43 kN/m ²	4,78 kN/m ²
-----------------	--	------	--------	--------	------	-----------	---------	-------------	-----	-----	----------	---------	-------	------------------------	------------------------

XTJ 32/R		31 m	11,6 m	500 kg	660°	180x70 cm	90°+80°	2,82-4,76 m	16%	18%	1,2 km/h	5940 kg	35 kN	2,43 kN/m ²	4,78 kN/m ²
-----------------	--	------	--------	--------	------	-----------	---------	-------------	-----	-----	----------	---------	-------	------------------------	------------------------

Available power options:
BI-ENERGY (DIESEL+AC)

Palazzani Industrie S.p.A.
Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073
info@palazzani.it
www.palazzani.it



NC 938 A 24

The technical data may deviate +/- 3% from the specified values.
Characteristics and technical data are informative only and subjected to change without notice.