


With Us, You can



HIGH GREEN SAFE

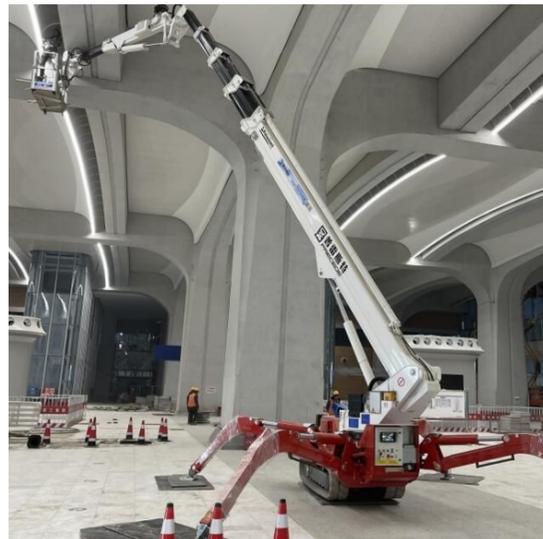

43 m



18 m



330 kg*
*optional



Bi-energy
Eco



Crawlers
Wheels



STANDARD EQUIPMENT

- Emergency electropump
- Pistons hydraulic pump at variable displacement for fast and sharp movements and consumption savings
- CANBUS distributor + CANBUS electronics
- “Retrun to home” function
- Hydraulic steering and transmission with 4 speeds
- Rubber tracks with hydraulically variable external width
- Independent outriggers rotating on 2 different positions
- Automatic set-up with self-levelling
- Turntable rotation at 660°
- Steel made telescopic boom + telescopic jib
- Removable aluminium alloy aerial cage 240x70x110cm
- Cage with hydraulic rotation 90° + 80°
- “Area manager” limiting device for safe working load 120 and 230 kg
- Radio control at the ground + electric control at the cage
- 230VAC electric plug on the cage
- Air \ water supplementary line
- Inter-ponic communication system
- PalSystem with touchscreen monitor for diagnostics and monitoring of operating parameters
- CE Mark homologation certificates, manuals, stickers and spares book in English language



3rd WORKING AREA 330 KG
WITH 3 MEN IN THE BASKET



HYDRAULIC WINCH 500 KG
WITH 46 m ROPE AND SUPPORT



INSTALLATION KIT FOR HYDRAULIC WINCH 500 KG
“RETURN TO HOME” FUNCTION INCLUDED



QUICK PIPES COUPLING KIT FOR HYDRAULIC WINCH 500 KG



COMPACT BASKET SUPPORT
4 CASTORS UNDER THE CAGE INCLUDED



TREE CUTTERS COVER PACKAGE



BASKET ANTI-COLLISION KIT WITH ULTRASONIC SENSORS AND LASERS




NON-MARKING TRACKS



CONTROL FOOT PEDAL ON THE CAGE



4 CASTORS UNDER THE CAGE



CAGES OF DIFFERENT SIZES




PADS FOR OUTRIGGERS



PADS HOLDER




CUSTOMIZED COLOURS




LED LIGHT



ELECTRONIC ANEMOMETER




LIFTING HOOK IN PLACE OF THE BASKET



DISPLAY IN THE BASKET



DRINK HOLDER IN THE BASKET



HANDS HEATER IN THE BASKET



DIAGNOSTIC CABLE KIT




3 kW - 230 VAC ELECTRIC GENERATOR



36 MONTHS OF WARRANTY ON THE BATTERY



CHARGER WITH ADAPTORS
3,7 kW / 7,4 kW / 11 kW / 22 kW + ADAPTORS FOR PLUGS IT/FR/CH/UK



LIFTING ACCESSORIES KIT FOR THE BASKET - LIFTING JIB, FRONT SUPPORTS, UPPER SUPPORTS, ELECTRONIC ANEMOMETER



GROUNDING CABLE INSIDE THE BOOM





BI-ENERGY








Diesel
32,5 kW



Single-phase
Electric motor
230 VAC - 2,2 kW



Three-phase
Electric motor
400 VAC - 5,5 kW

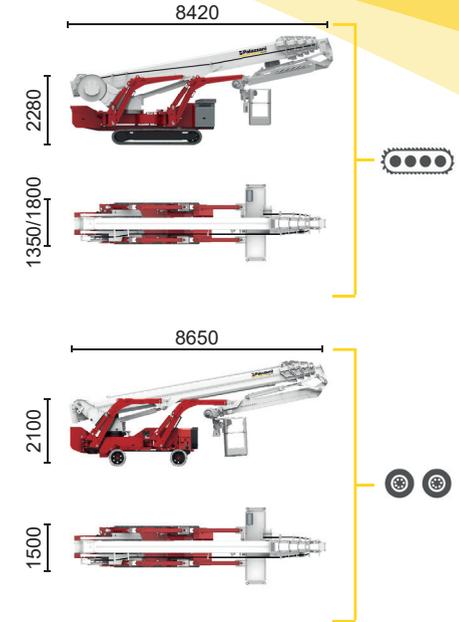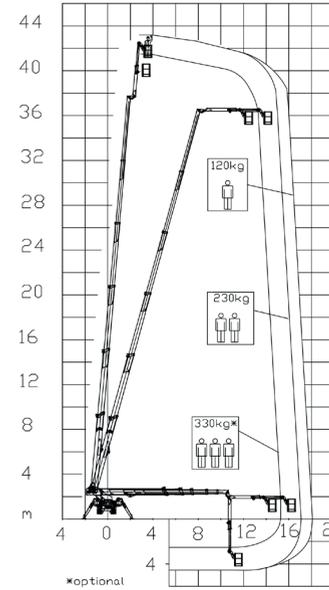

15,2 m	17 m	18 m	11,8 m	13,5 m	L1	L2	W1	W2	W3
330 kg*	230 kg	120 kg	330 kg*	120/230 kg	5945 mm	7095 mm	5230 mm	4435 mm	3640 mm



XTJ 43+/C	XTJ 43+/R	43 m	18 m	330 kg*	660°	240x70 cm	90°+80°	3,64-5,23 m	23%	38%	2 km/h	11150 kg	75 kN	3,58 kN/m ²	5,52 kN/m ²
		43 m	18 m	330 kg*	660°	240x70 cm	90°+80°	3,64-5,23 m	23%	16%	1,4 km/h	11150 kg	75 kN	3,58 kN/m ²	5,37 kN/m ²

Available power options:
ECO (AC+BATTERY)

The technical data may deviate +/- 3 % from the specified values.
Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.
Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073
info@palazzani.it
www.palazzani.it



NC 945 A 24



BI-ENERGY




Diesel
32,5 kW




Single-phase
Electric motor
230 VAC - 2,2 kW



Three-phase
Electric motor
400 VAC - 5,5 kW

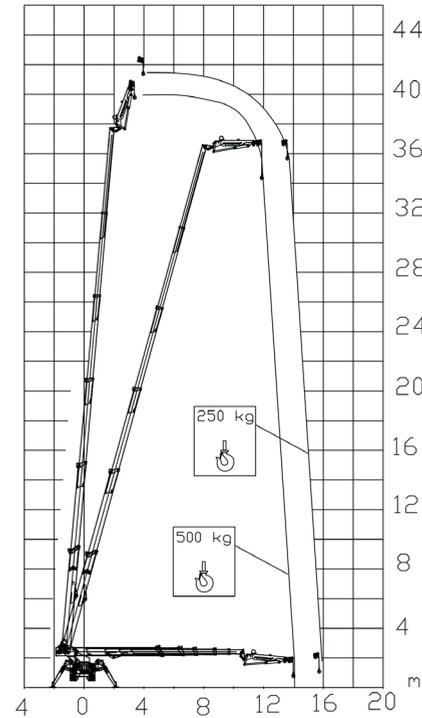

500 kg	250 kg
13,5 m	15,2 m

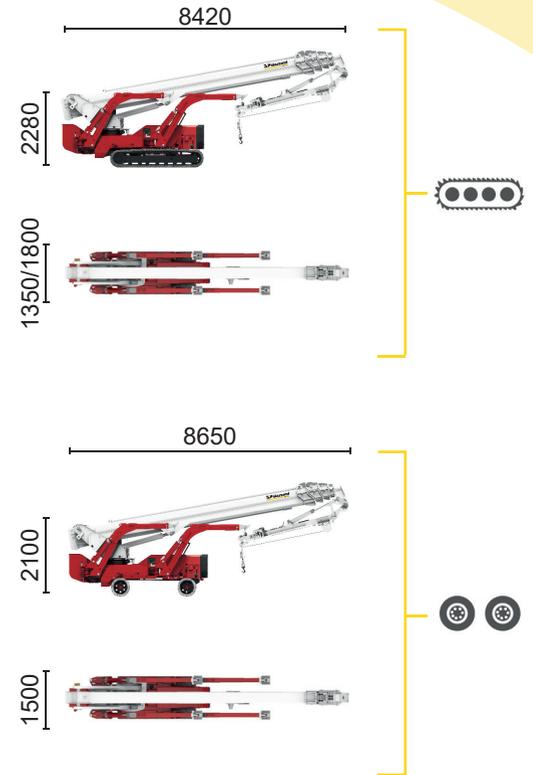

XTJ 43+/C		41,7 m	15,2 m	500 kg	660°	240x70 cm	90°+80°	3,64-5,23 m	23%	38%	2 km/h	11150 kg	75 kN	3,58 kN/m ²	5,52 kN/m ²
------------------	--	--------	--------	--------	------	-----------	---------	-------------	-----	-----	--------	----------	-------	------------------------	------------------------

XTJ 43+/R		41,7 m	15,2 m	500 kg	660°	240x70 cm	90°+80°	3,64-5,23 m	23%	16%	1,4 km/h	11150 kg	75 kN	3,58 kN/m ²	5,37 kN/m ²
------------------	--	--------	--------	--------	------	-----------	---------	-------------	-----	-----	----------	----------	-------	------------------------	------------------------

Available power options:
ECO (AC+BATTERY)

The technical data may deviate +/- 3 % from the specified values.
Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.
Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073
info@palazzani.it
www.palazzani.it



NC 946 A 24








ECO

 Inverter actuated
Electric motor
20 kW

 Lithium iron
phosphate battery
LiFePO4 - 29,1 kWh
(48 V - 570 Ah)

 Type 2 plug charge

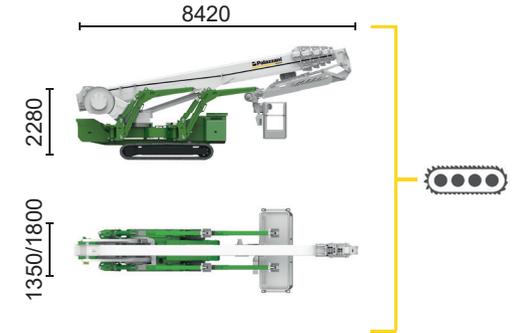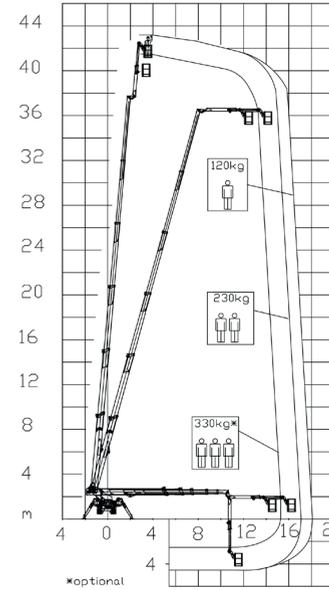

15,2 m	17 m	18 m	11,8 m	13,5 m	L1	L2	W1	W2	W3
330 kg*	230 kg	120 kg	330 kg*	120/230 kg	5945 mm	7095 mm	5230 mm	4435 mm	3640 mm



XTJ 43+/C		43 m	18 m	330 kg*	660°	240x70 cm	90°+80°	3,64-5,23 m	23%	38%	2 km/h	11150 kg	75 kN	3,58 kN/m2	5,52 kN/m2
------------------	---	------	------	---------	------	-----------	---------	-------------	-----	-----	--------	----------	-------	------------	------------

Available power options:
BI-ENERGY (DIESEL+AC)

The technical data may deviate +/- 3 % from the specified values.
 Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.
 Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy
 Tel. (+39) 0306857073
 info@palazzani.it
 www.palazzani.it



NC 947 A 24



ECO




Inverter actuated
Electric motor
20 kW




Lithium iron
phosphate battery
LiFePO4 - 29,1 kWh
(48 V - 570 Ah)



Type 2 plug charge

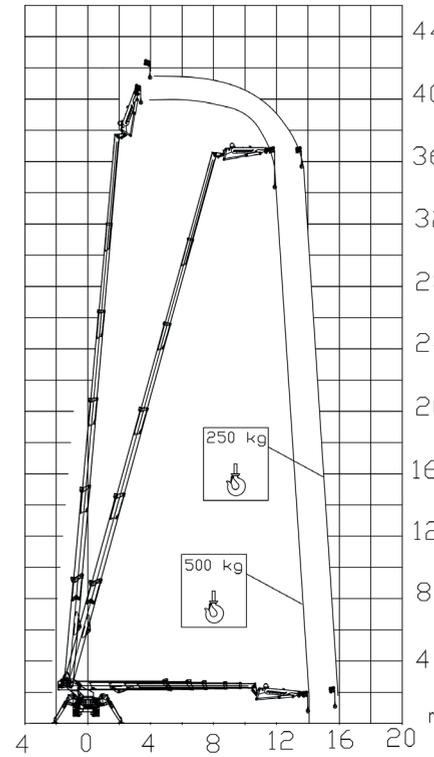

500 kg	250 kg
13,5 m	15,2 m

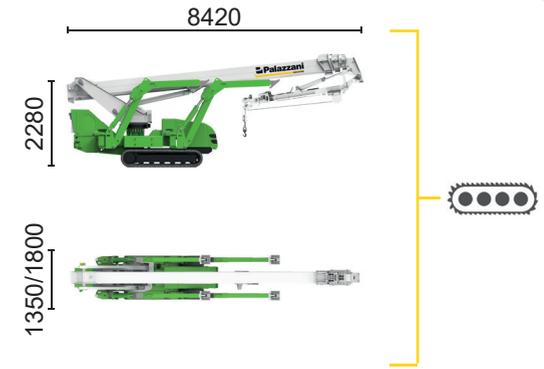

XTJ 43+/C		41,7 m	15,2 m	500 kg	660°	240x70 cm	90°+80°	3,64-5,23 m	23%	38%	2 km/h	11150 kg	75 kN	3,58 kN/m ²	5,52 kN/m ²
------------------	--	--------	--------	--------	------	-----------	---------	-------------	-----	-----	--------	----------	-------	------------------------	------------------------

Available power options:

BI-ENERGY (DIESEL+AC)

The technical data may deviate +/- 3 % from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 948 A 24