


With Us, You can

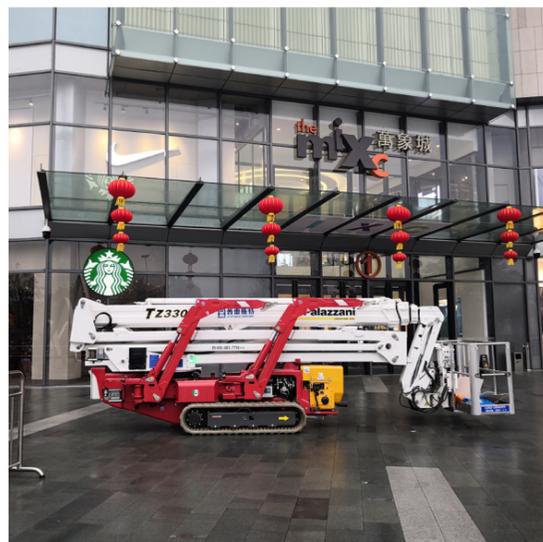

**HIGH**

**GREEN**

**SAFE**



	32 m
	16,4 m
	250 kg
	Bi-energy Eco Hybrid
	Crawlers



**STANDARD EQUIPMENT**

- Emergency electropump
- Pistons hydraulic pump at variable displacement for fast and sharp movements and consumption savings
- CANBUS distributor + CANBUS electronics
- "Return to home" function
- Hydraulic steering and transmission on rubber tracks whit hydraulically variable external width
- Independent outriggers rotating on 2 different positions
- Automatic set-up with self-levelling
- Turntable rotation at 660°
- Double steel made double pantograph, telescopic boom + fixed jib
- Hydraulic and electric lines inside the boom
- Removable aluminium alloy aerial cage 180x70x110cm
- Cage with hydraulic rotation 90° + 90°
- "Area manager" limiting device for safe working load 120 and 250 kg
- Radio control at the ground + electric control at the cage
- Air \ water supplementary line
- 230 VAC electric plug on the cage
- PalSystem with touchscreen monitor for diagnostics and monitoring of operating parameters
- CE Mark homologation certificates, manuals, stickers and spares book in English language

**BI-ENERGY**  
(Diesel + AC)



**ECO**  
(AC + Battery)



**HYBRID<sup>2</sup>**  
(Diesel + AC+Battery)



**TREE CUTTERS COVER PACKAGE**



**BASKET ANTI-COLLISION KIT WITH ULTRASONIC SENSORS AND LASERS**



**NON-MARKING TRACKS**



**CONTROL FOOT PEDAL ON THE CAGE**



**4 CASTORS UNDER THE CAGE**



**CAGE FOR ONE MAN 70x70x110 CM**



**PADS FOR OUTRIGGERS**



**DIAGNOSTIC CABLE KIT**



**36 MONTHS OF WARRANTY ON THE BATTERY**



**CUSTOMIZED COLOURS**



**LED LIGHT**



**INTER-PHONIC COMMUNICATION SYSTEM**



**ELECTRONIC ANEMOMETER**



**DISPLAY IN THE BASKET**



**DRINK HOLDER IN THE BASKET**



**HANDS HEATER IN THE BASKET**



**EXTENDED STABILIZERS**



**3 kW - 230 VAC ELECTRIC GENERATOR**










**BI-ENERGY**



Diesel  
18,2 kW



Inverter actuated  
Single-phase  
Electric motor  
230 VAC - 3 kW

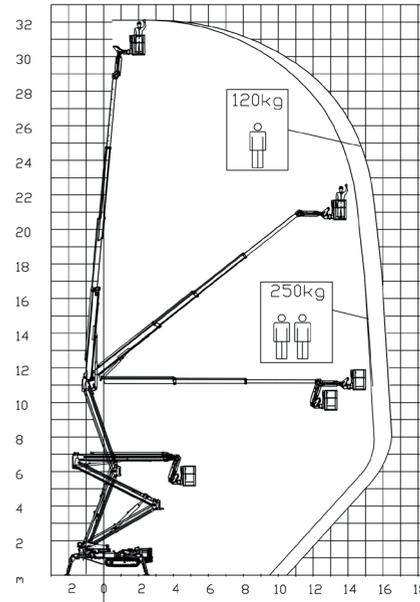

15,4 m	16,4 m	9,5 m	L1	L2	W1	W2	W3
250 kg	120 kg	250/120 kg	4725 mm	6170 mm	4910 mm	4020 mm	3130 mm



TZ 330+/C



32 m

16,4 m

250 kg

360°

180x70 cm

90°+90°

3,13-4,9 m

18%

32%

2,4 km/h

7200 kg

49 kN

3,1 kN/m<sup>2</sup>

5,72 kN/m<sup>2</sup>

Available power options:

**ECO** (AC+BATTERY)

**HYBRID<sup>2</sup>** (DIESEL+AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 932 A 24







**ECO**



Inverter actuated  
Electric motor  
16 kW



Lithium iron  
phosphate battery  
LiFePO4 - 21,5 kWh  
(48 V - 420 Ah)

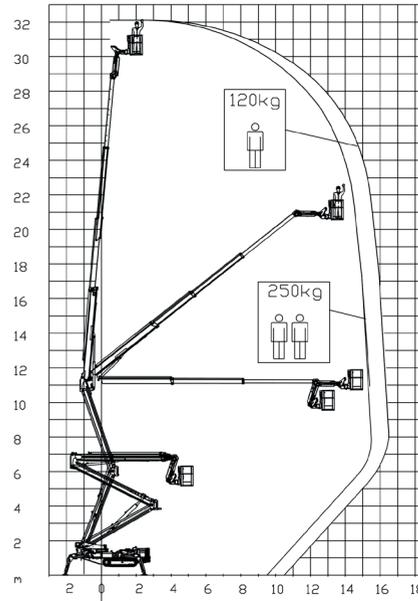

15,4 m	16,4 m	9,5 m	L1	L2	W1	W2	W3
250 kg	120 kg	250/120 kg	4725 mm	6170 mm	4910 mm	4020 mm	3130 mm



TZ 330+/C



32 m

16,4 m

250 kg

360°

180x70 cm

90°+90°

3,13-4,91 m

18%

32%

2,4 km/h

7200 kg

49 kN

3,1 kN/m2

5,72 kN/m2

Available power options:

**BI-ENERGY** (DIESEL+AC)

**HYBRID<sup>2</sup>** (DIESEL+AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 933 A 24



**HYBRID<sup>2</sup>**

---





 Diesel  
10,6 kW

---

 Inverter actuated  
Electric motor  
16 kW

---

 Lithium iron  
phosphate battery  
LiFePO4 - 16,1 kWh  
(48 V - 315 Ah)

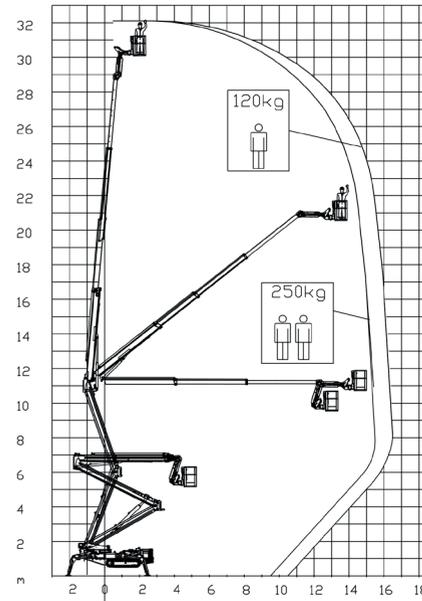

15,4 m	16,4 m	9,5 m	L1	L2	W1	W2	W3
250 kg	120 kg	250/120 kg	4725 mm	6170 mm	4910 mm	4020 mm	3130 mm



<b>TZ 330+/C</b>		32 m	16,4 m	250 kg	360°	180x70 cm	90°+90°	3,13-4,91 m	18%	32%	1,8 km/h	7460 kg	49 kN	3,21 kN/m <sup>2</sup>	5,92 kN/m <sup>2</sup>
------------------	-------------------------------------------------------------------------------------	------	--------	--------	------	-----------	---------	-------------	-----	-----	----------	---------	-------	------------------------	------------------------

Available power options:

**BI-ENERGY** (DIESEL+AC)

**ECO** (AC+BATTERY)

The technical data may deviate +/- 3% from the specified values.

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani Industrie S.p.A.

Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy

Tel. (+39) 0306857073

info@palazzani.it

www.palazzani.it



NC 934 A 24